




SERVICE MANUAL

THIS SERVICE MANUAL (6413TB/TVK131/W6413TB) CONTAINS ONLY DIFFERENCE PARTS FROM ORIGINAL MODEL. FOR ALL OTHER DATA, SEE ORIGINAL SERVICE MANUAL MODELS ST413B.

13" COLOR TELEVISION 6413TB/TVK131/W6413TB

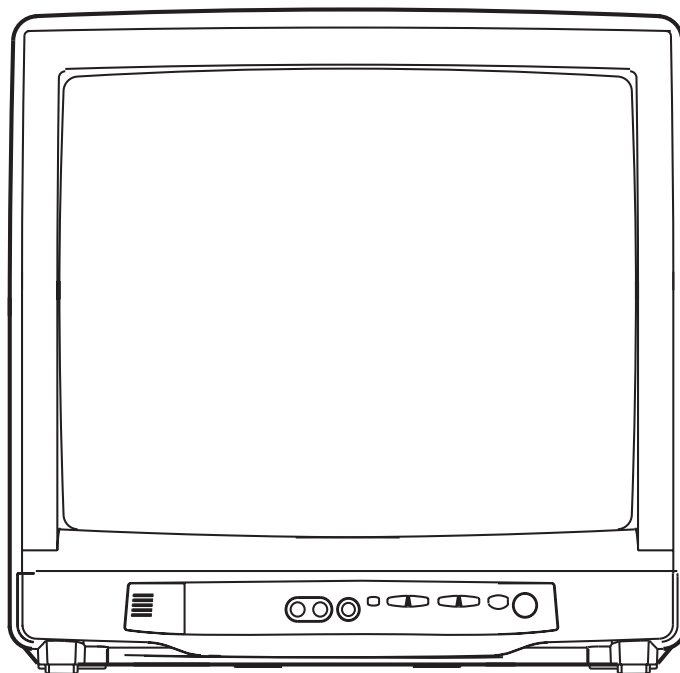

IMPORTANT SAFETY NOTICE


Proper service and repair is important to the safe, reliable operation of all Funai Equipment. The service procedures recommended by Funai and described in this service manual are effective methods of performing service operations. Some of these service special tools should be used when and as recommended.

It is important to note that this service manual contains various **CAUTIONS** and **NOTICES** which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It also is important to understand that these **CAUTIONS** and **NOTICES ARE NOT EXHAUSTIVE**. Funai could not possibly know, evaluate and advice the service trade of all conceivable ways in which service might be done or of the possible hazardous consequences of each way. Consequently, Funai has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by Funai must first use all precautions thoroughly so that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.


TABLE OF CONTENTS

Block Diagrams.....	1-1
Schematic Diagrams / CBA' s and Test Points	2-1
Parts List	3-1

IF/Video/System Control Block Diagram

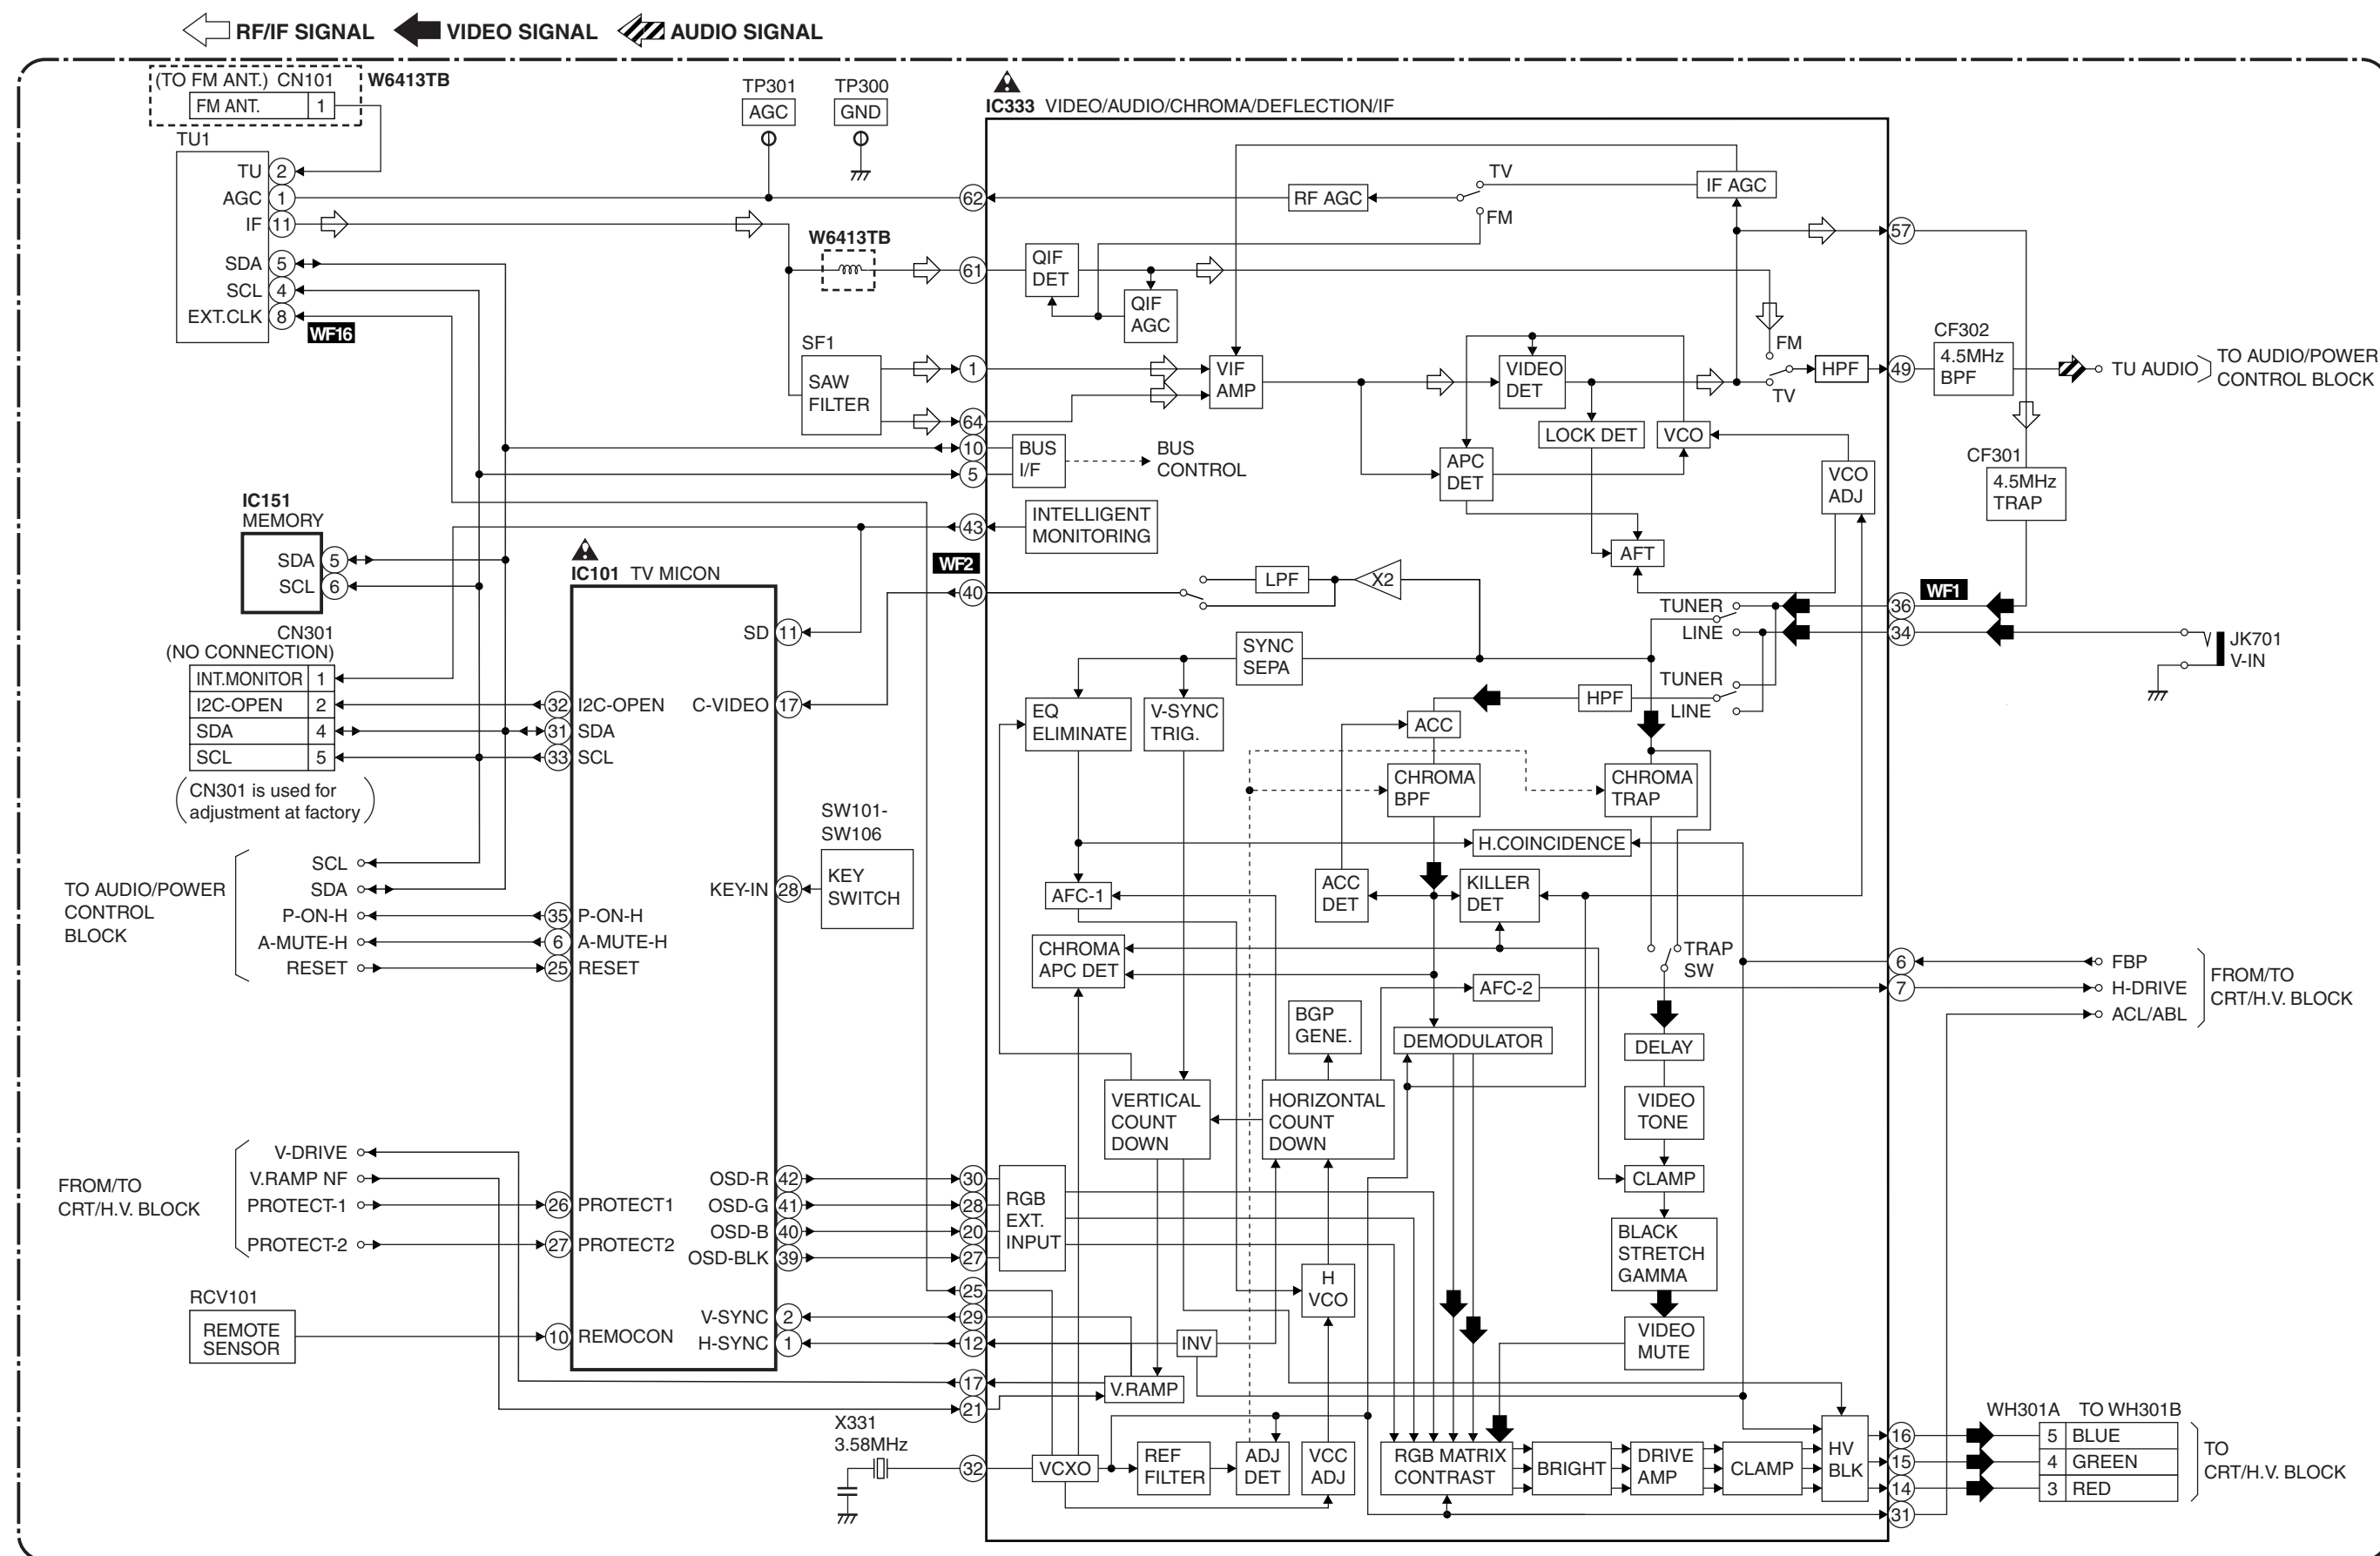

Audio/Power Control Block Diagram

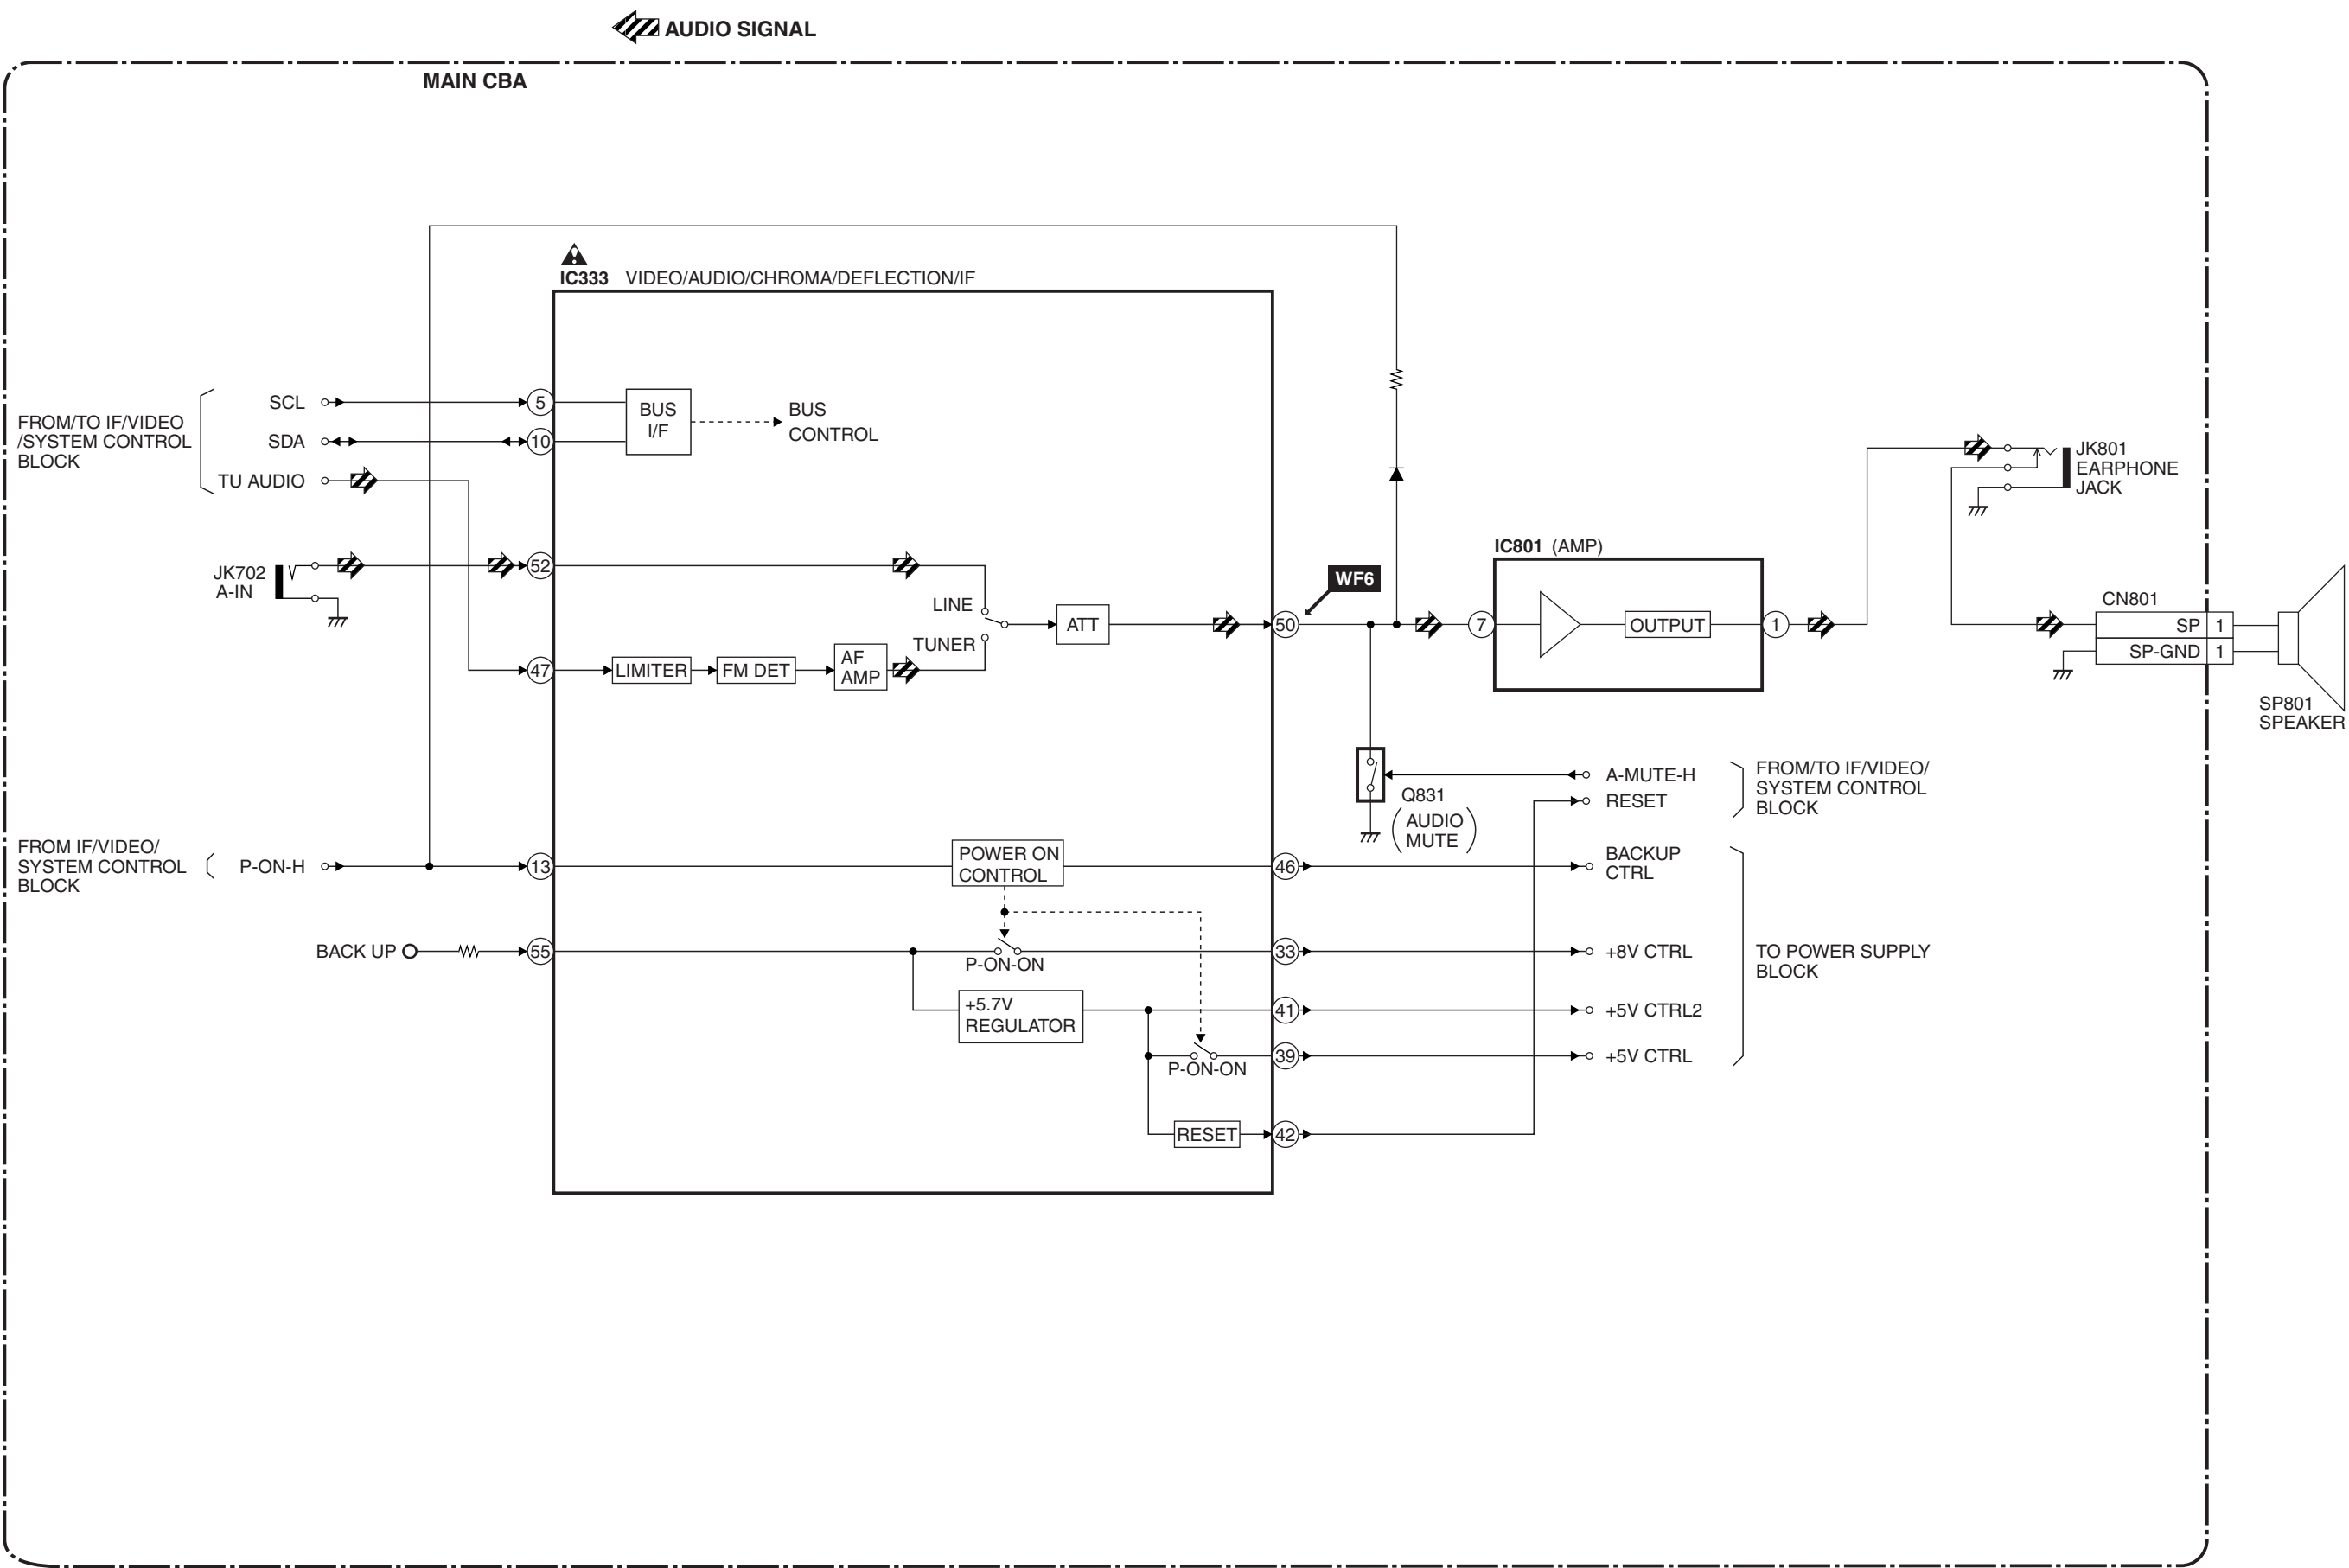

SCHEMATIC DIAGRAMS / CBA'S AND TEST POINTS

Standard Notes

Many electrical and mechanical parts in this chassis have special characteristics. These characteristics often pass unnoticed and the protection afforded by them cannot necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts that have these special safety characteristics are identified in this manual and its supplements; electrical components having such features are identified by the mark "▲" in the schematic diagram and the parts list. Before replacing any of these components, read the parts list in this manual carefully. The use of substitute replacement parts that do not have the same safety characteristics as specified in the parts list may create shock, fire, or other hazards.

Note:

1. Do not use the part number shown on these drawings for ordering. The correct part number is shown in the parts list, and may be slightly different or amended since these drawings were prepared.
2. All resistance values are indicated in ohms ($K=10^3$, $M=10^6$).
3. Resistor wattages are 1/4W or 1/6W unless otherwise specified.
4. All capacitance values are indicated in μF ($P=10^{-6}\mu F$).
5. All voltages are DC voltages unless otherwise specified.

Note of Capacitors:

ML --- Mylar Cap. PP --- Metalized Film Cap. SC --- Semiconductor Cap. L --- Low Leakage type

Temperature Characteristics of Capacitors are noted with the following:

B --- $\pm 10\%$ CH --- $0 \pm 60 \text{ ppm}/^\circ\text{C}$ SL --- $+350 \sim 1000 \text{ ppm}/^\circ\text{C}$



Tolerance of Capacitors are noted with the following:

Z --- $+80 \sim -20\%$

Note of Resistors:


CEM --- Cement Res. MTL --- Metal Res. F --- Fuse Res.

Capacitors and transistors are represented by the following symbols.

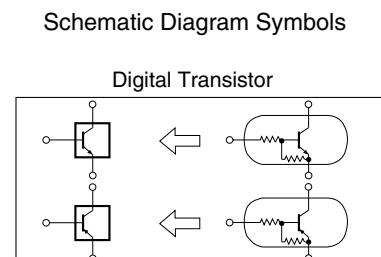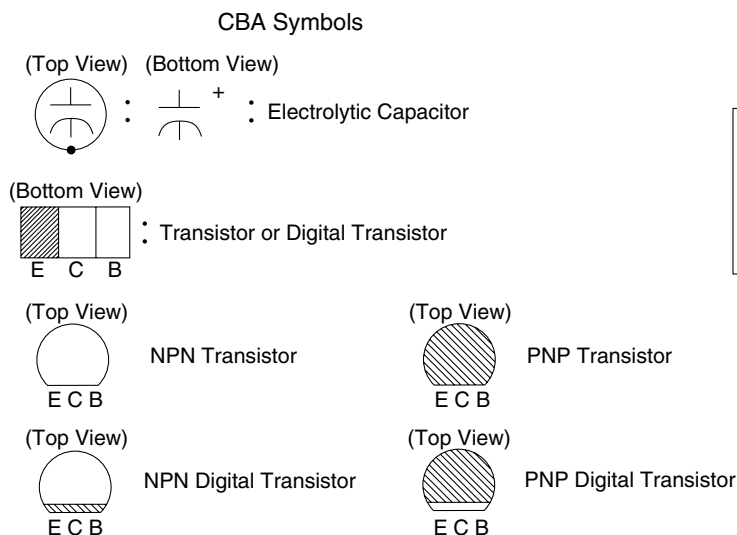

LILIST OF CAUTION, NOTES, AND SYMBOLS USED IN THE SCHEMATIC DIAGRAMS ON THE FOLLOWING PAGES:

- CAUTION:** FOR CONTINUED PROTECTION AGAINST FIRE HAZARD, REPLACE ONLY WITH THE SAME TYPE FUSE. ATTENTION: POUR UNE PROTECTION CONTINUE LES RISQUES D'INCELE N'UTILISER QUE DES FUSIBLE DE MEMO TYPE.



RISK OF FIRE-REPLACE FUSE AS MARKED.

2. CAUTION:

Fixed Voltage (or Auto voltage selectable) power supply circuit is used in this unit.

If Main Fuse (F001) is blown, first check to see that all components in the power supply circuit are not defective before you connect the AC plug to the AC power supply. Otherwise it may cause some components in the power supply circuit to fail.

3. Note:


- (1) Do not use the part number shown on the drawings for ordering. The correct part number is shown in the parts list, and may be slightly different or amended since the drawings were prepared.
- (2) To maintain original function and reliability of repaired units, use only original replacement parts which are listed with their part numbers in the parts list section of the service manual.

4. Wire Connectors


- (1) Prefix symbol "CN" means "connector" (can disconnect and reconnect).
- (2) Prefix symbol "CL" means "wire-solder holes of the PCB" (wire is soldered directly).

5. Note: Mark "•" is a leadless (chip) component.

6. Voltage indications on the schematics are as shown below:

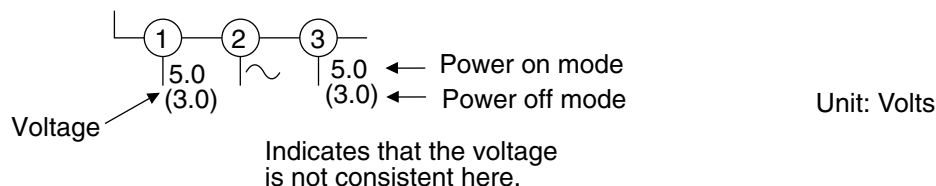


7. How to read converged lines



Examples:


1. "1-D3" means that line number "1" goes to area "D3".
2. "1-B1" means that line number "1" goes to area "B1".

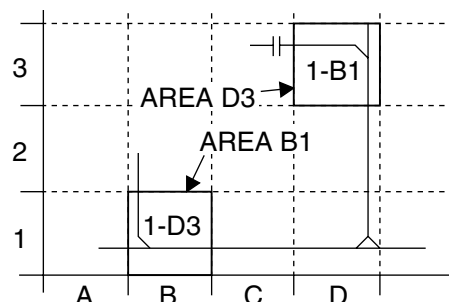

8. Test Point Information


- ⊙ : Indicates a test point with a jumper wire across a hole in the PCB.
- : Used to indicate a test point with a component lead on foil side.
- ⊘ : Used to indicate a test point with no test pin.
- : Used to indicate a test point with a test pin.

Main 1/2 Schematic Diagram

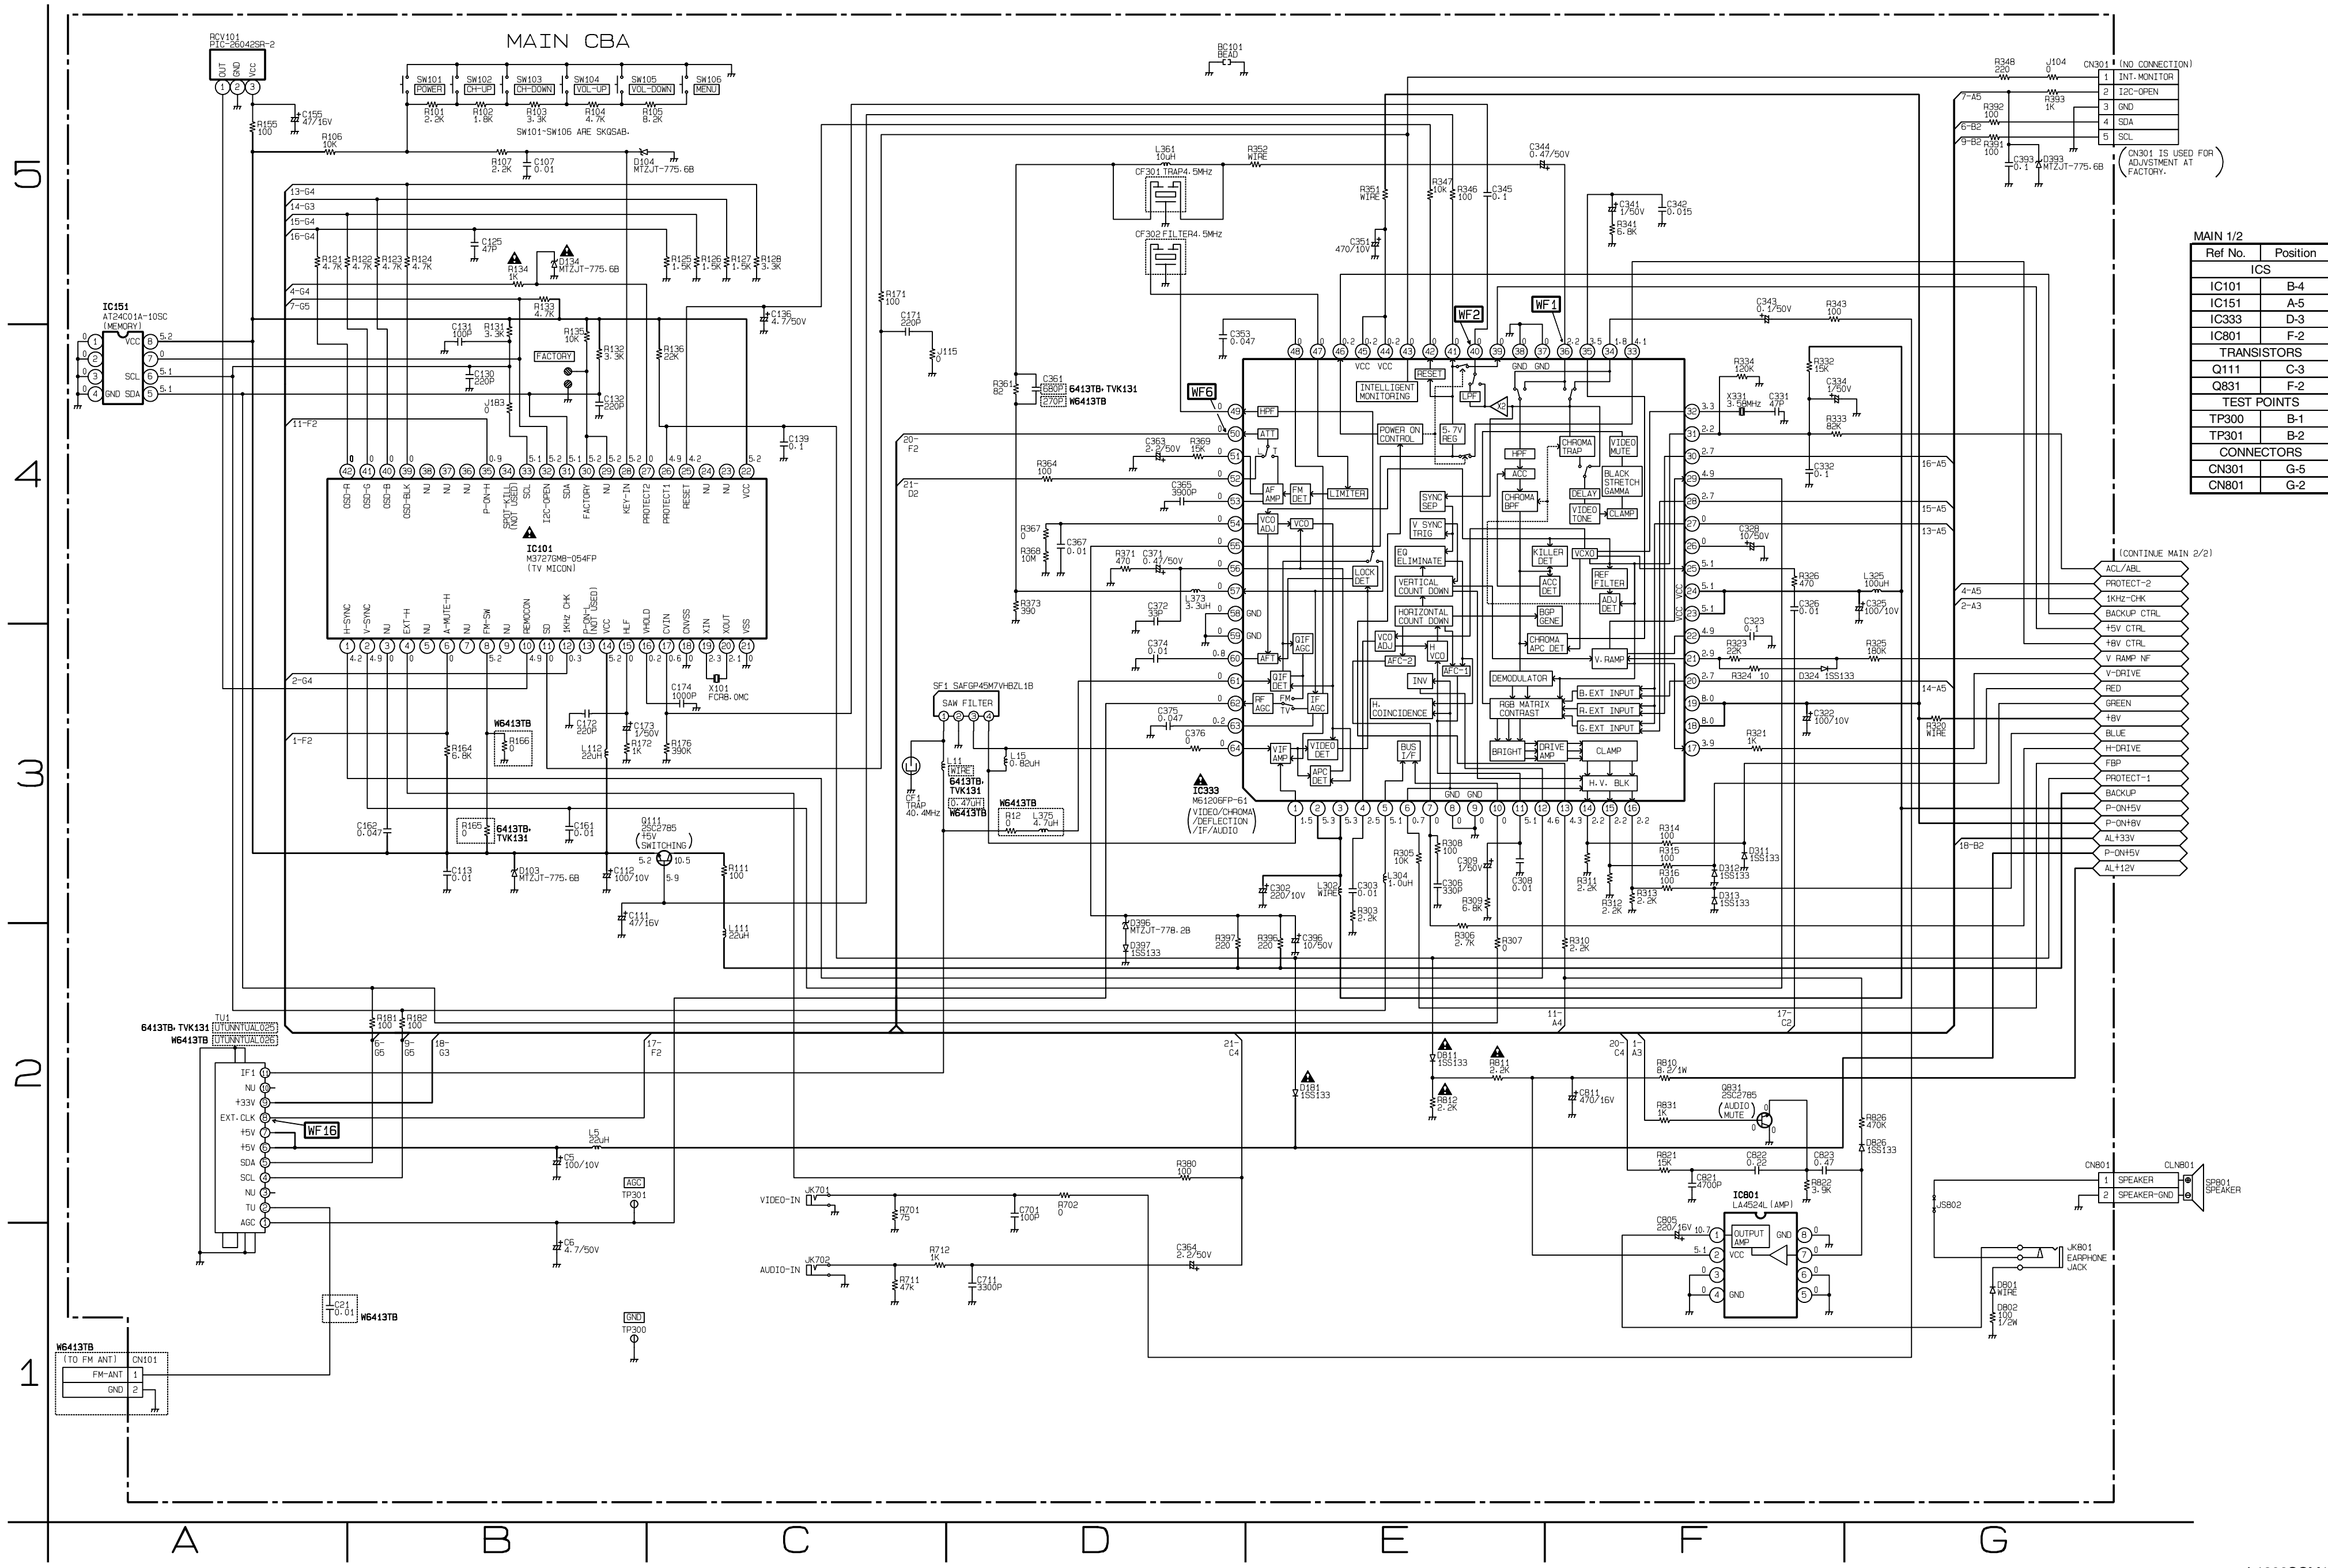

A5	B5	C5	D5	E5	F5	G5
A4	B4	C4	D4	E4	F4	G4
A3	B3	C3	D3	E3	F3	G3
A2	B2	C2	D2	E2	F2	G2
A1	B1	C1	D1	E1	F1	G1

--- IF SIGNAL
— VIDEO SIGNAL
◀ AUDIO SIGNAL

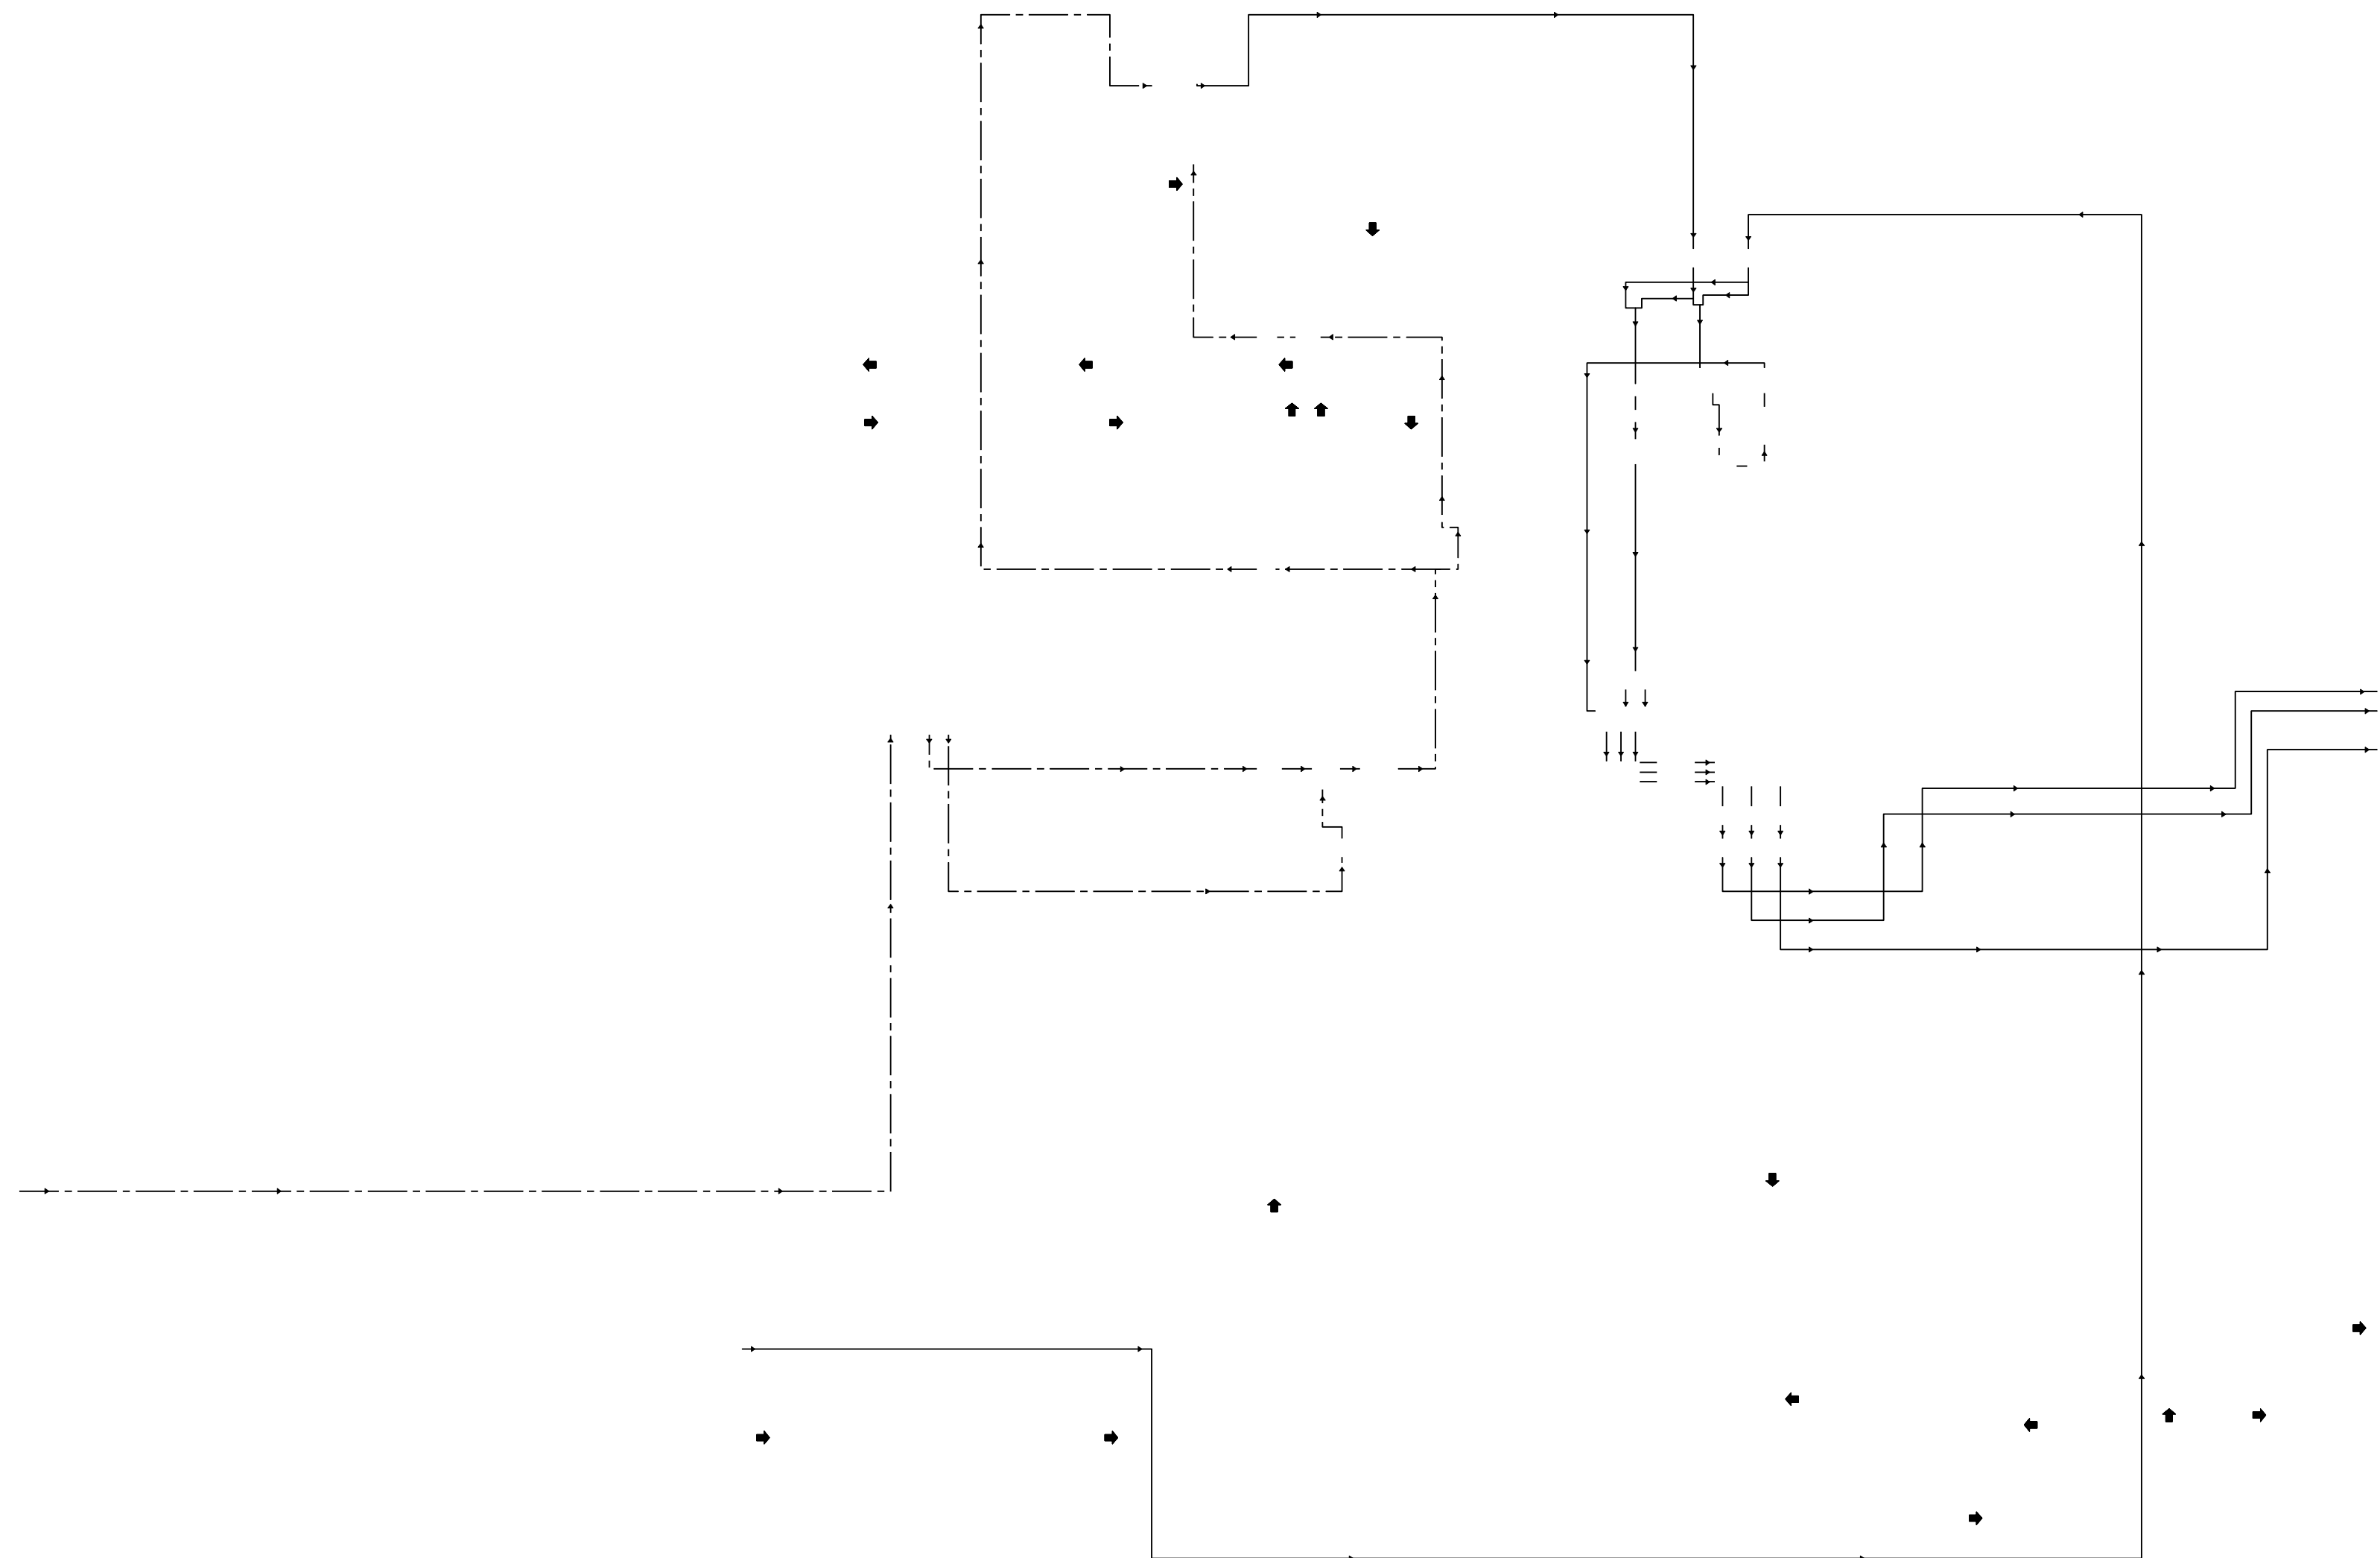

Main 2/2 & CRT Schematic Diagram

CAUTION !
Fixed voltage power supply circuit is used in this unit.
If Main Fuse (F601) is blown, check to see that all components in the power supply circuit are not defective before you connect the AC plug to the AC power supply. Otherwise it may cause some components in the power supply circuit to fail.




CAUTION
FOR CONTINUED PROTECTION AGAINST FIRE HAZARD,
REPLACE ONLY WITH THE SAME TYPE FUSE.
ATTENTION : POUR UNE PROTECTION CONTINUE LES RISQUES
D'INCENDIE N'UTILISER QUE DES FUSIBLE DE MEMO TYPE.
RISK OF FIRE-REPLACE FUSE AS MARKED.

"This symbol means fast operating fuse."
"Ce symbole représente un fusible à fusion rapide."


BECAUSE A HOT CHASSIS GROUND IS PRESENT IN THE POWER SUPPLY CIRCUIT, AN ISOLATION TRANSFORMER MUST BE USED. ALSO, IN ORDER TO HAVE THE ABILITY TO INCREASE THE INPUT SLOWLY, WHEN TROUBLESHOOTING THIS TYPE POWER SUPPLY CIRCUIT, A VARIABLE ISOLATION TRANSFORMER IS REQUIRED.

NOTE :
The voltage for parts in hot circuit is measured using hot GND as a common terminal.

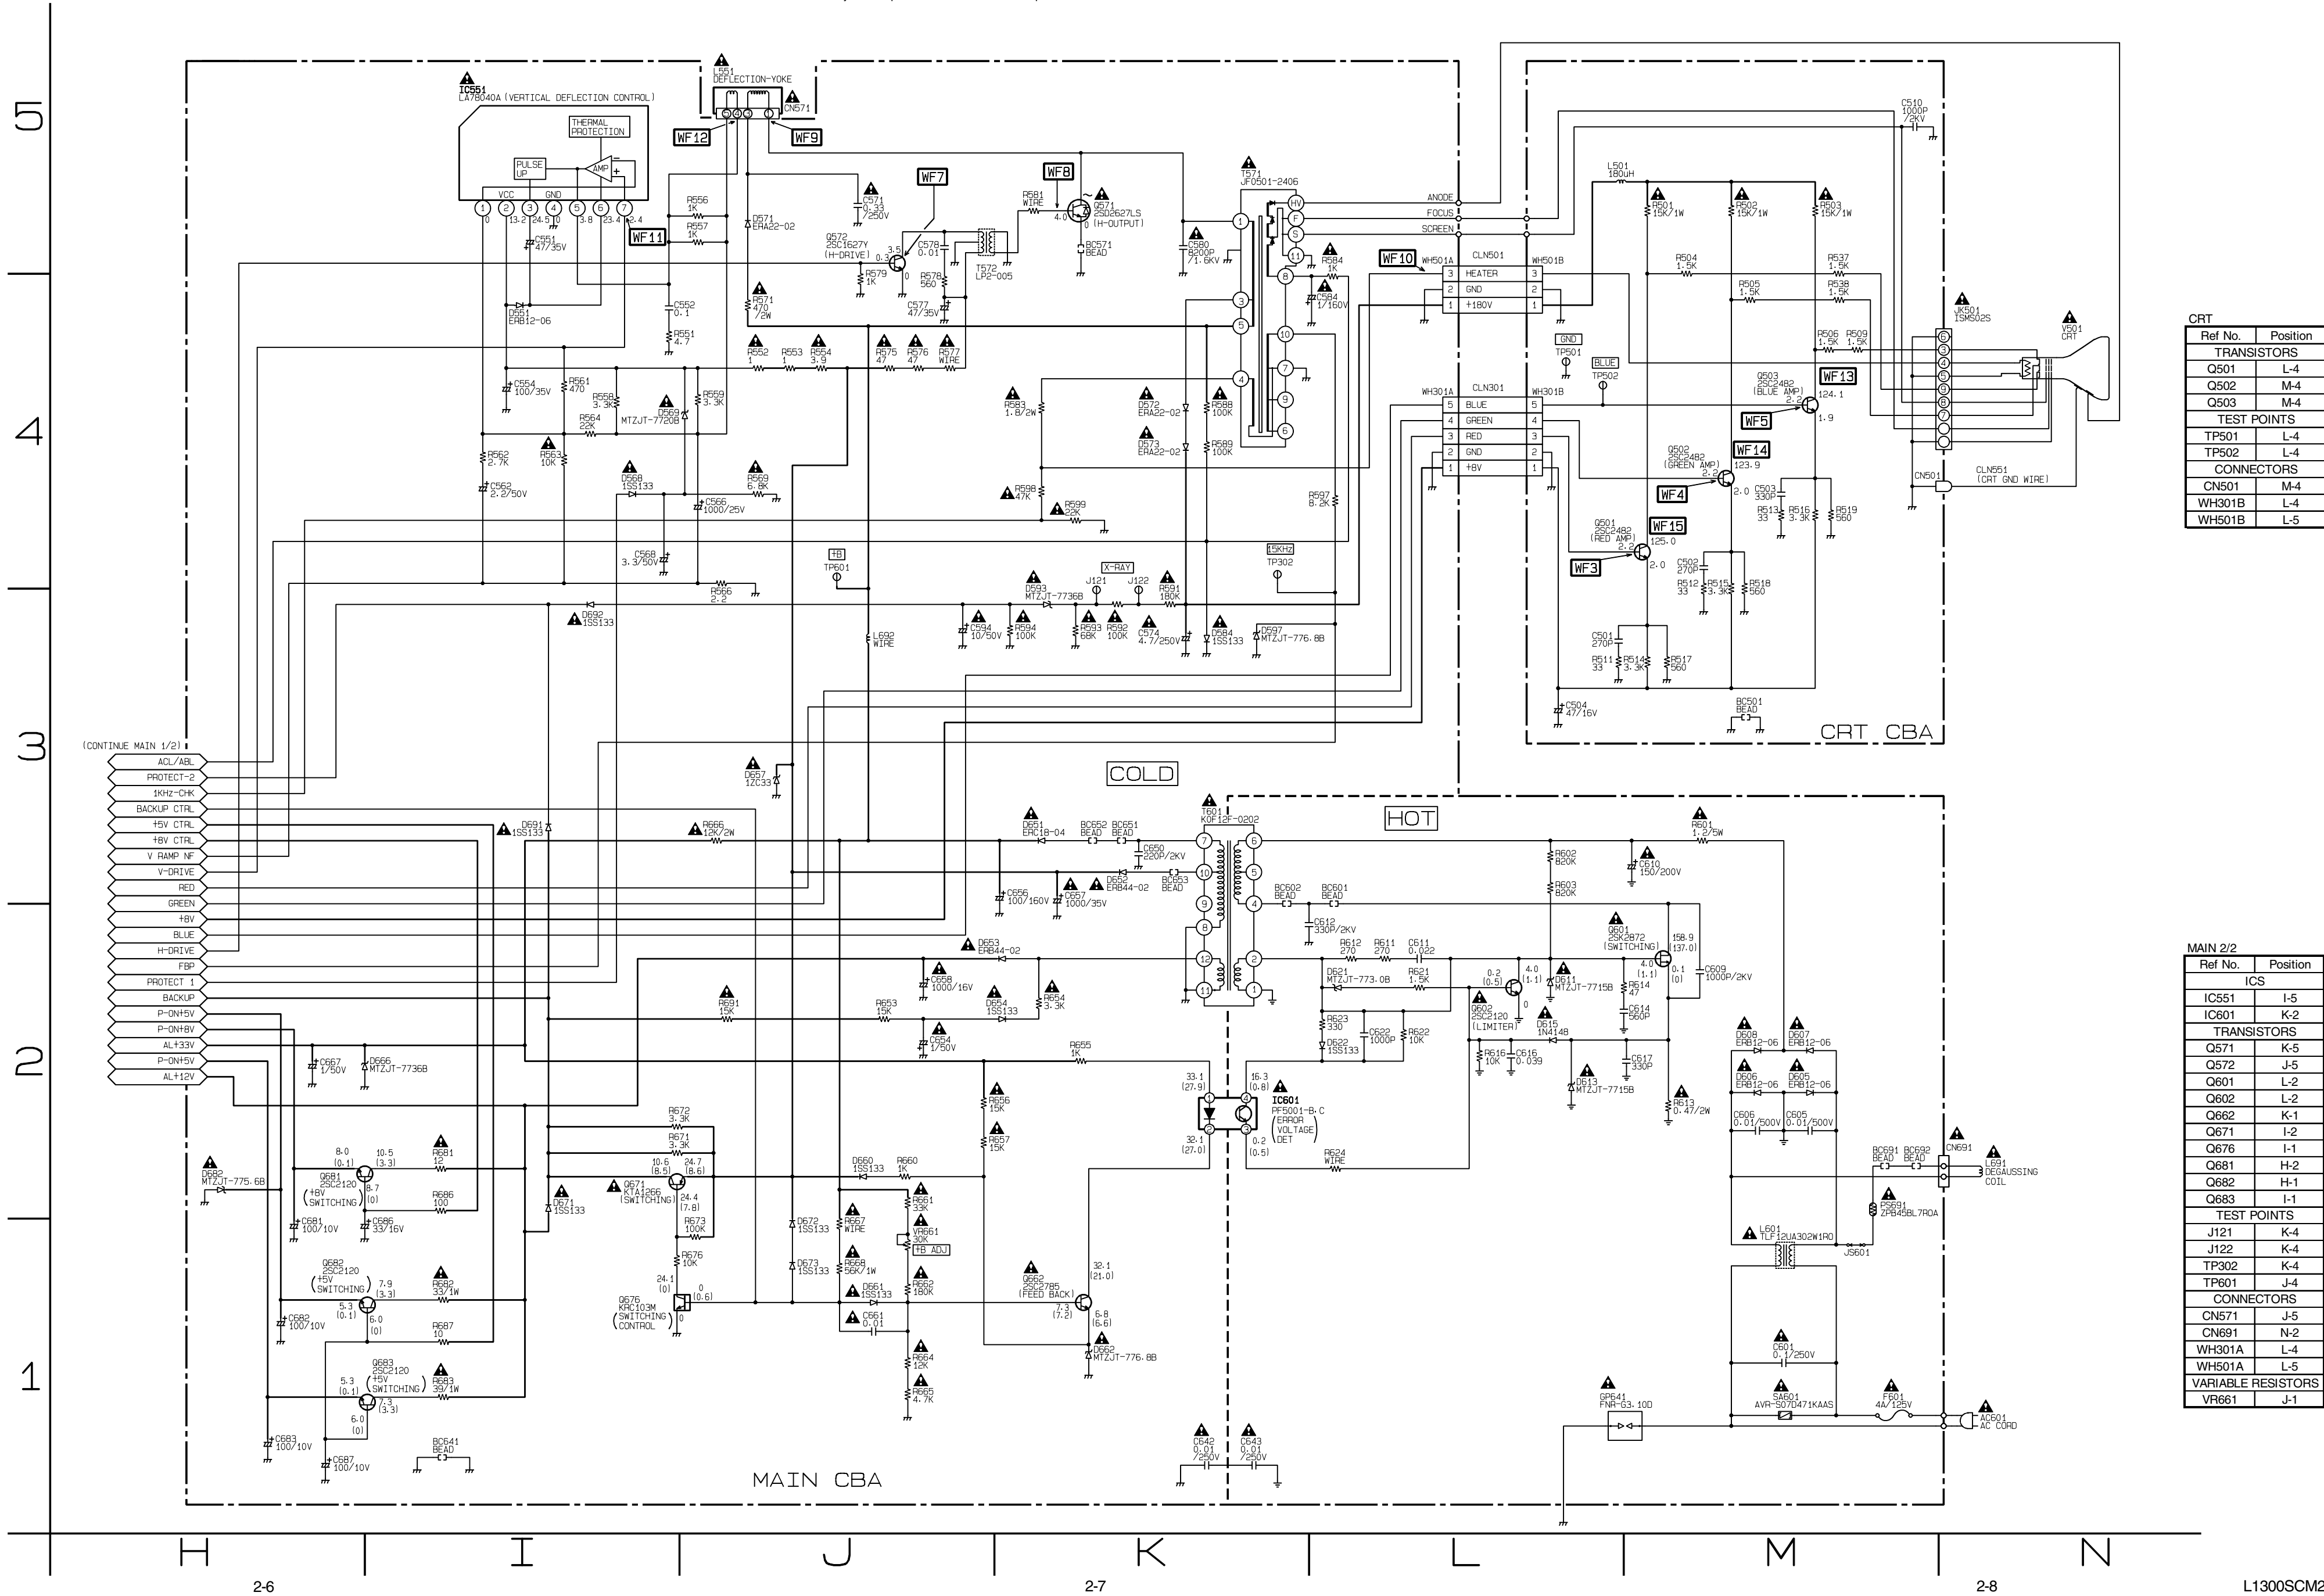


H5	I5	J5	K5	L5	M5	N5
H4	I4	J4	K4	L4	M4	N4
H3	I3	J3	K3	L3	M3	N3
H2	I2	J2	K2	L2	M2	N2
H1	I1	J1	K1	L1	M1	N1

VIDEO SIGNAL

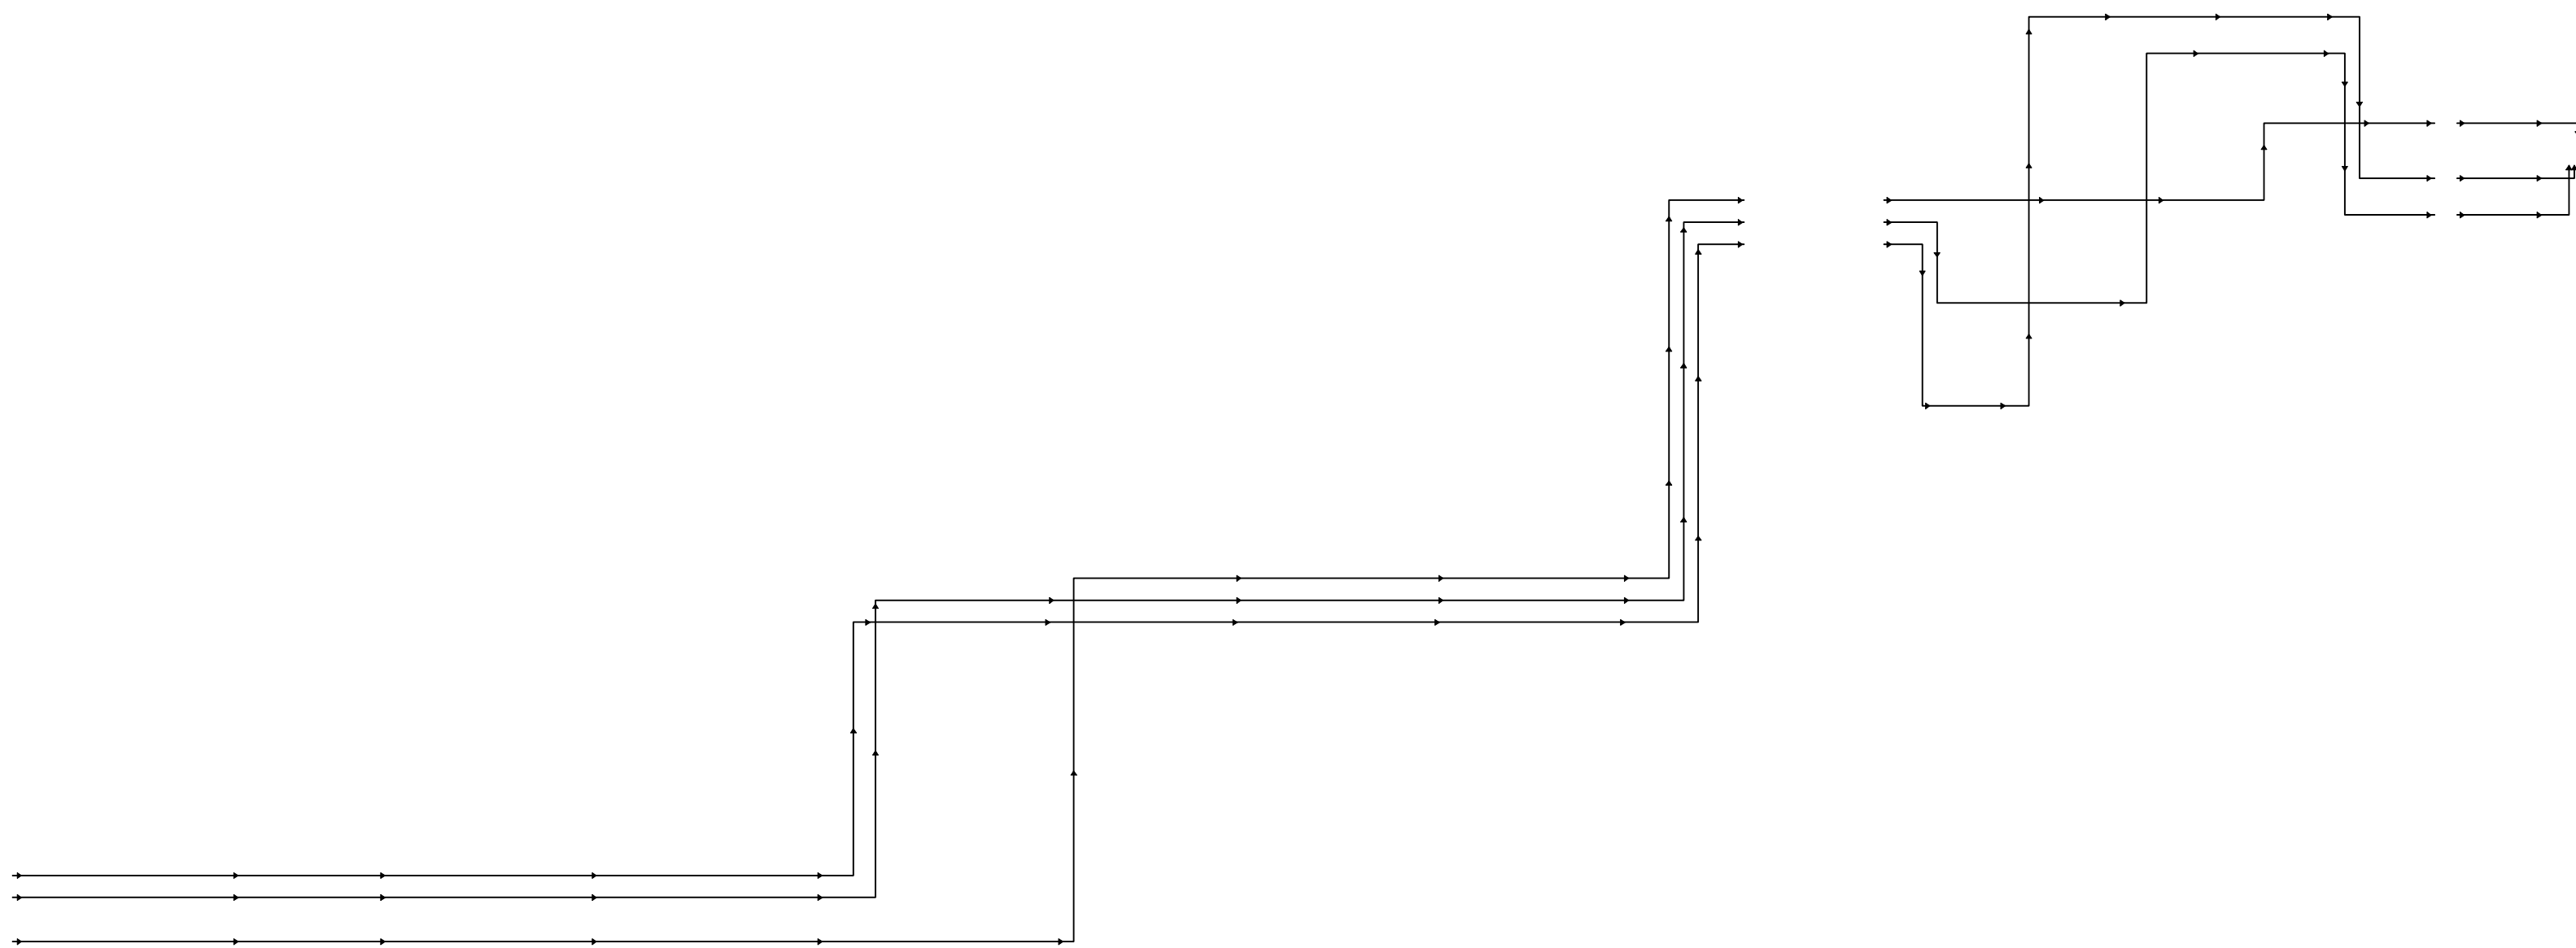


Main CBA Top View

CAUTION !
Fixed voltage power supply circuit is used in this unit.
If Main Fuse (F601) is blown, check to see that all components in the power supply circuit are not defective before you connect the AC plug to the AC power supply.
Otherwise it may cause some components in the power supply circuit to fail.




CAUTION
FOR CONTINUED PROTECTION AGAINST FIRE HAZARD,
REPLACE ONLY WITH THE SAME TYPE FUSE.
ATTENTION : POUR UNE PROTECTION CONTINUE LES FUSIBLES
D'INCELE N'UTILISER QUE DES FUSIBLE DE MEMO TYPE.
RISK OF FIRE-REPLACE FUSE AS MARKED.
This symbol means fast operating fuse.
Ce symbole représente un fusible à fusion rapide.

**BECAUSE A HOT CHASSIS GROUND IS PRESENT IN THE POWER
SUPPLY CIRCUIT, AN ISOLATION TRANSFORMER MUST BE USED.
ALSO, IN ORDER TO HAVE THE ABILITY TO INCREASE THE INPUT
SLOWLY, WHEN TROUBLESHOOTING THIS TYPE POWER SUPPLY
CIRCUIT, A VARIABLE ISOLATION TRANSFORMER IS REQUIRED.**

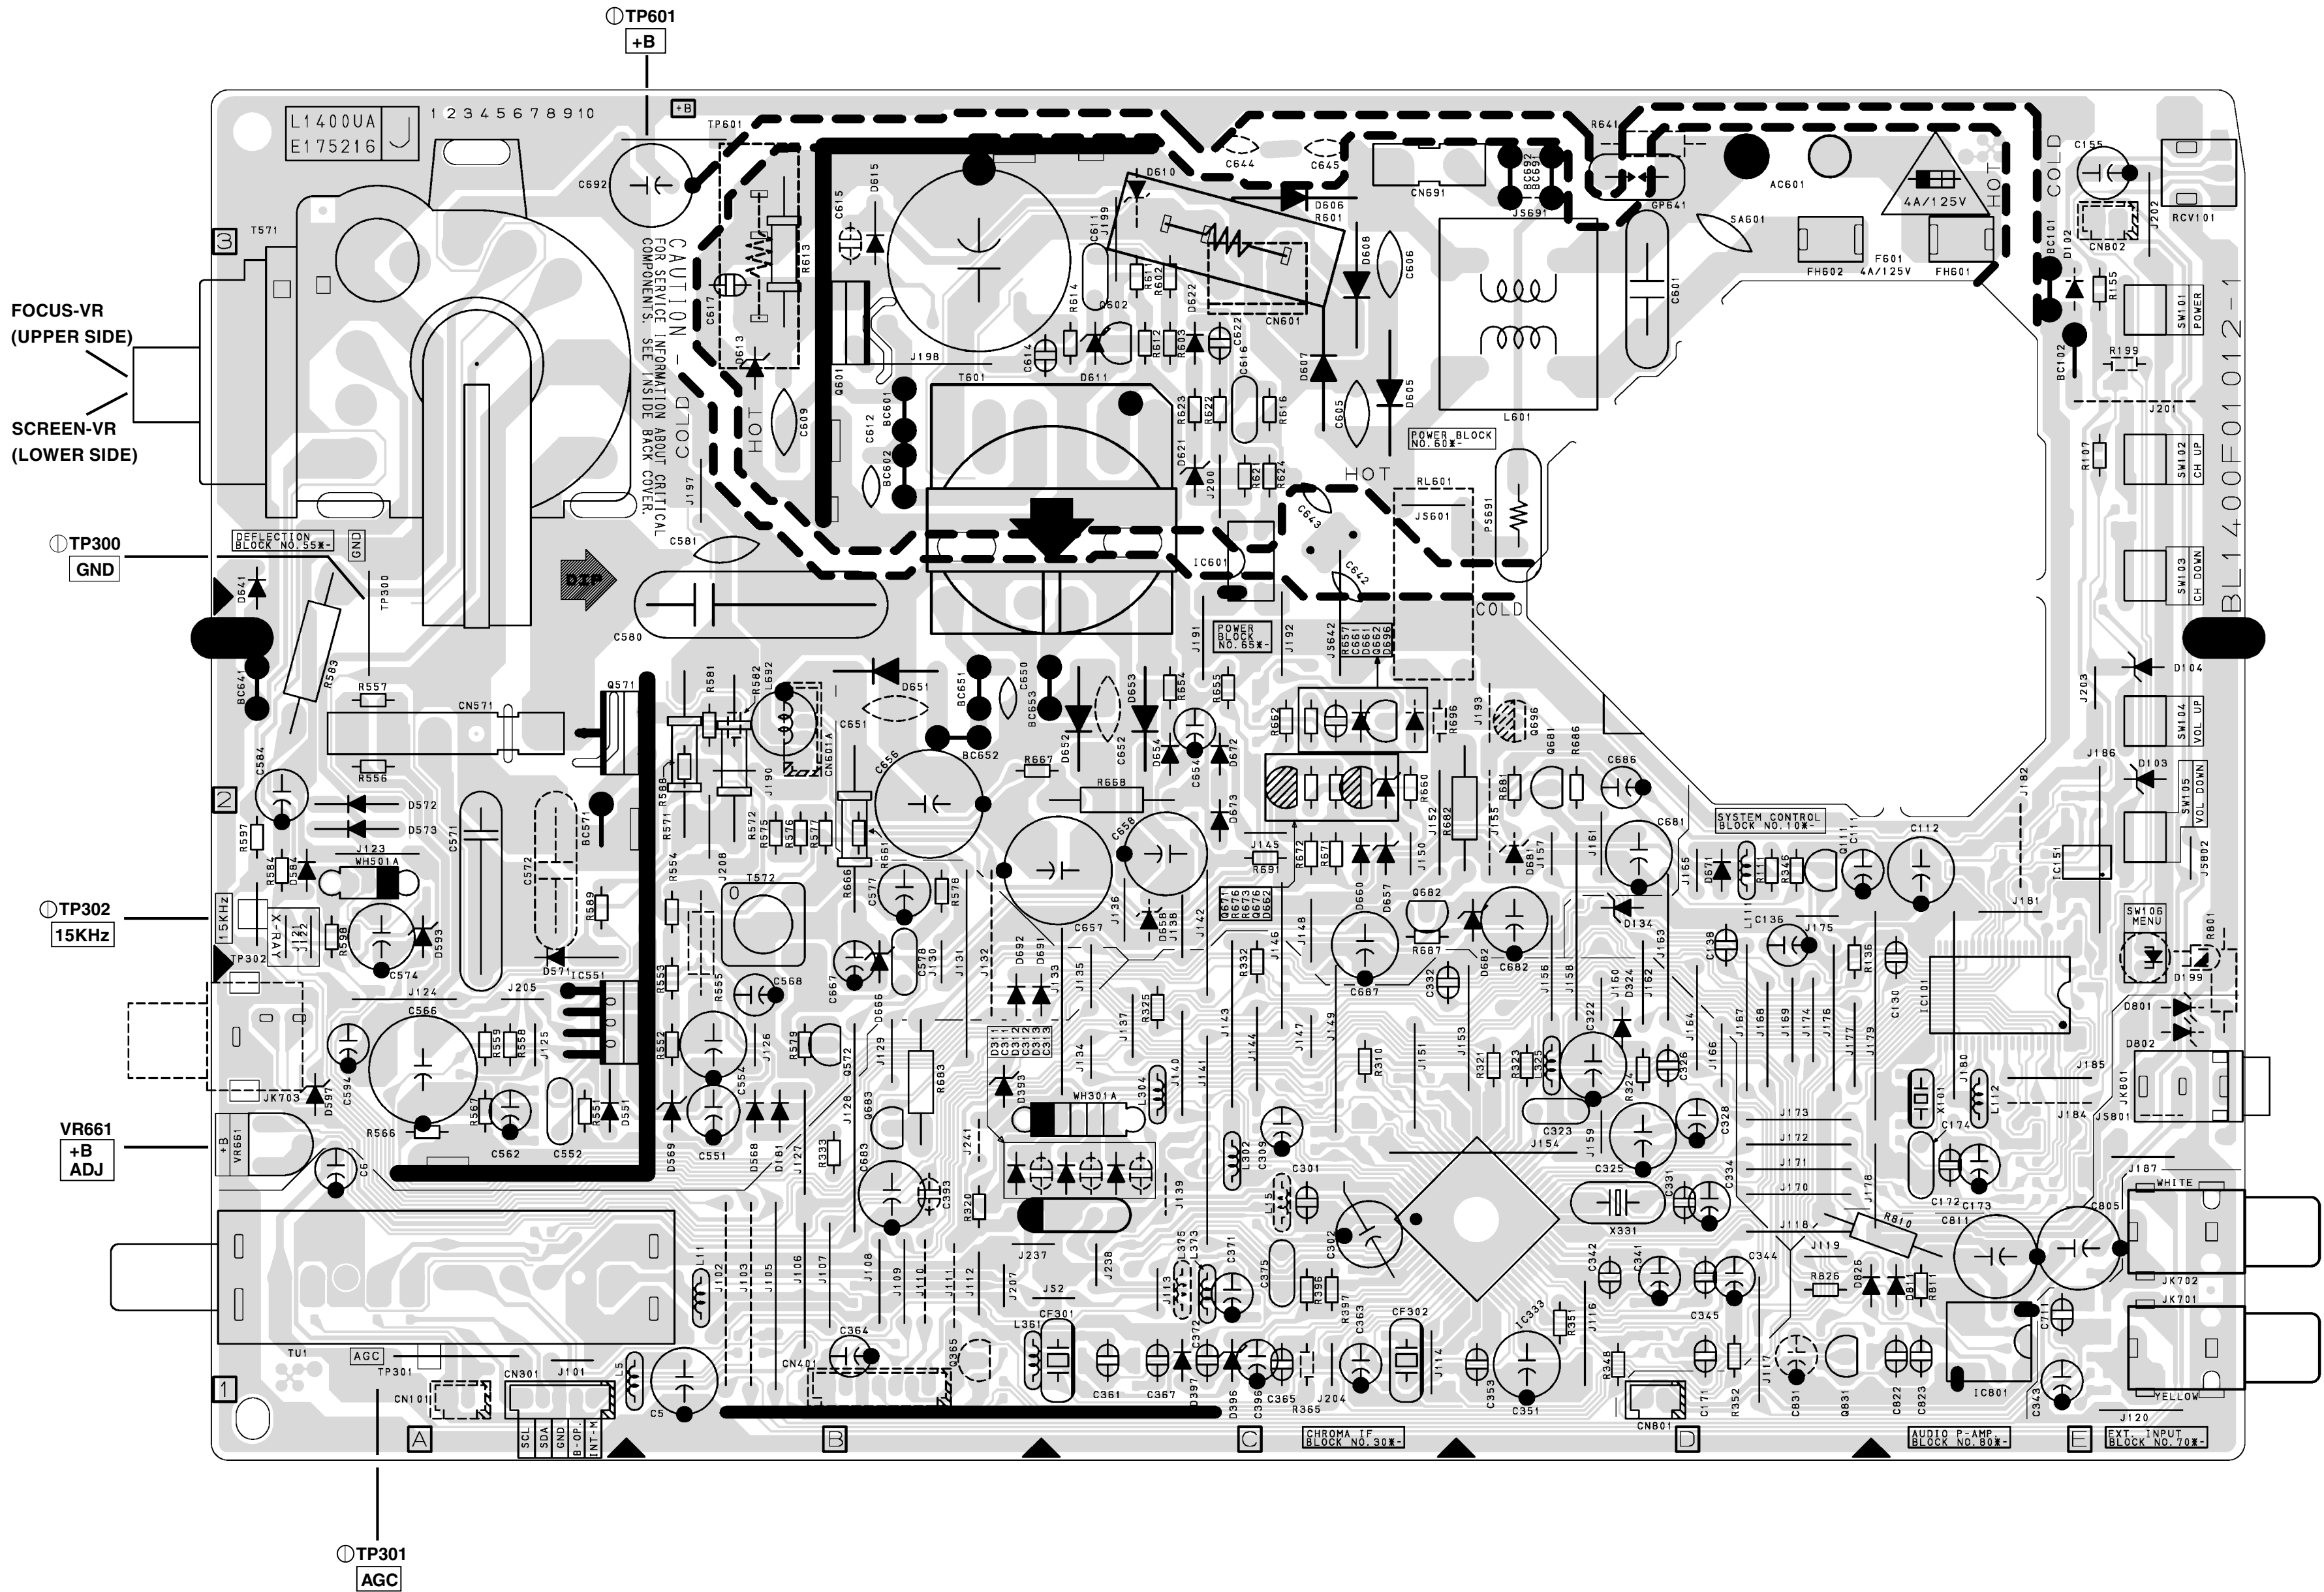


Main CBA Bottom View

CAUTION !
Fixed voltage power supply circuit is used in this unit.
If Main Fuse (F601) is blown, check to see that all components in the power supply circuit are not defective before you connect the AC plug to the AC power supply. Otherwise it may cause some components in the power supply circuit to fail.




CAUTION
FOR CONTINUED PROTECTION AGAINST FIRE HAZARD,
REPLACE ONLY WITH THE SAME TYPE FUSE.
ATTENTION : POUR UNE PROTECTION CONTINUE LES RISQUES
D'INCELE N'UTILISER QUE DES FUSIBLE DE MEMO TYPE.
RISK OF FIRE-REPLACE FUSE AS MARKED.
This symbol means fast operating fuse.
Ce symbole représente un fusible à fusion rapide.


BECAUSE A HOT CHASSIS GROUND IS PRESENT IN THE POWER
SUPPLY CIRCUIT, AN ISOLATION TRANSFORMER MUST BE USED.
ALSO, IN ORDER TO HAVE THE ABILITY TO INCREASE THE INPUT
SLOWLY, WHEN TROUBLESHOOTING THIS TYPE POWER SUPPLY
CIRCUIT, A VARIABLE ISOLATION TRANSFORMER IS REQUIRED.

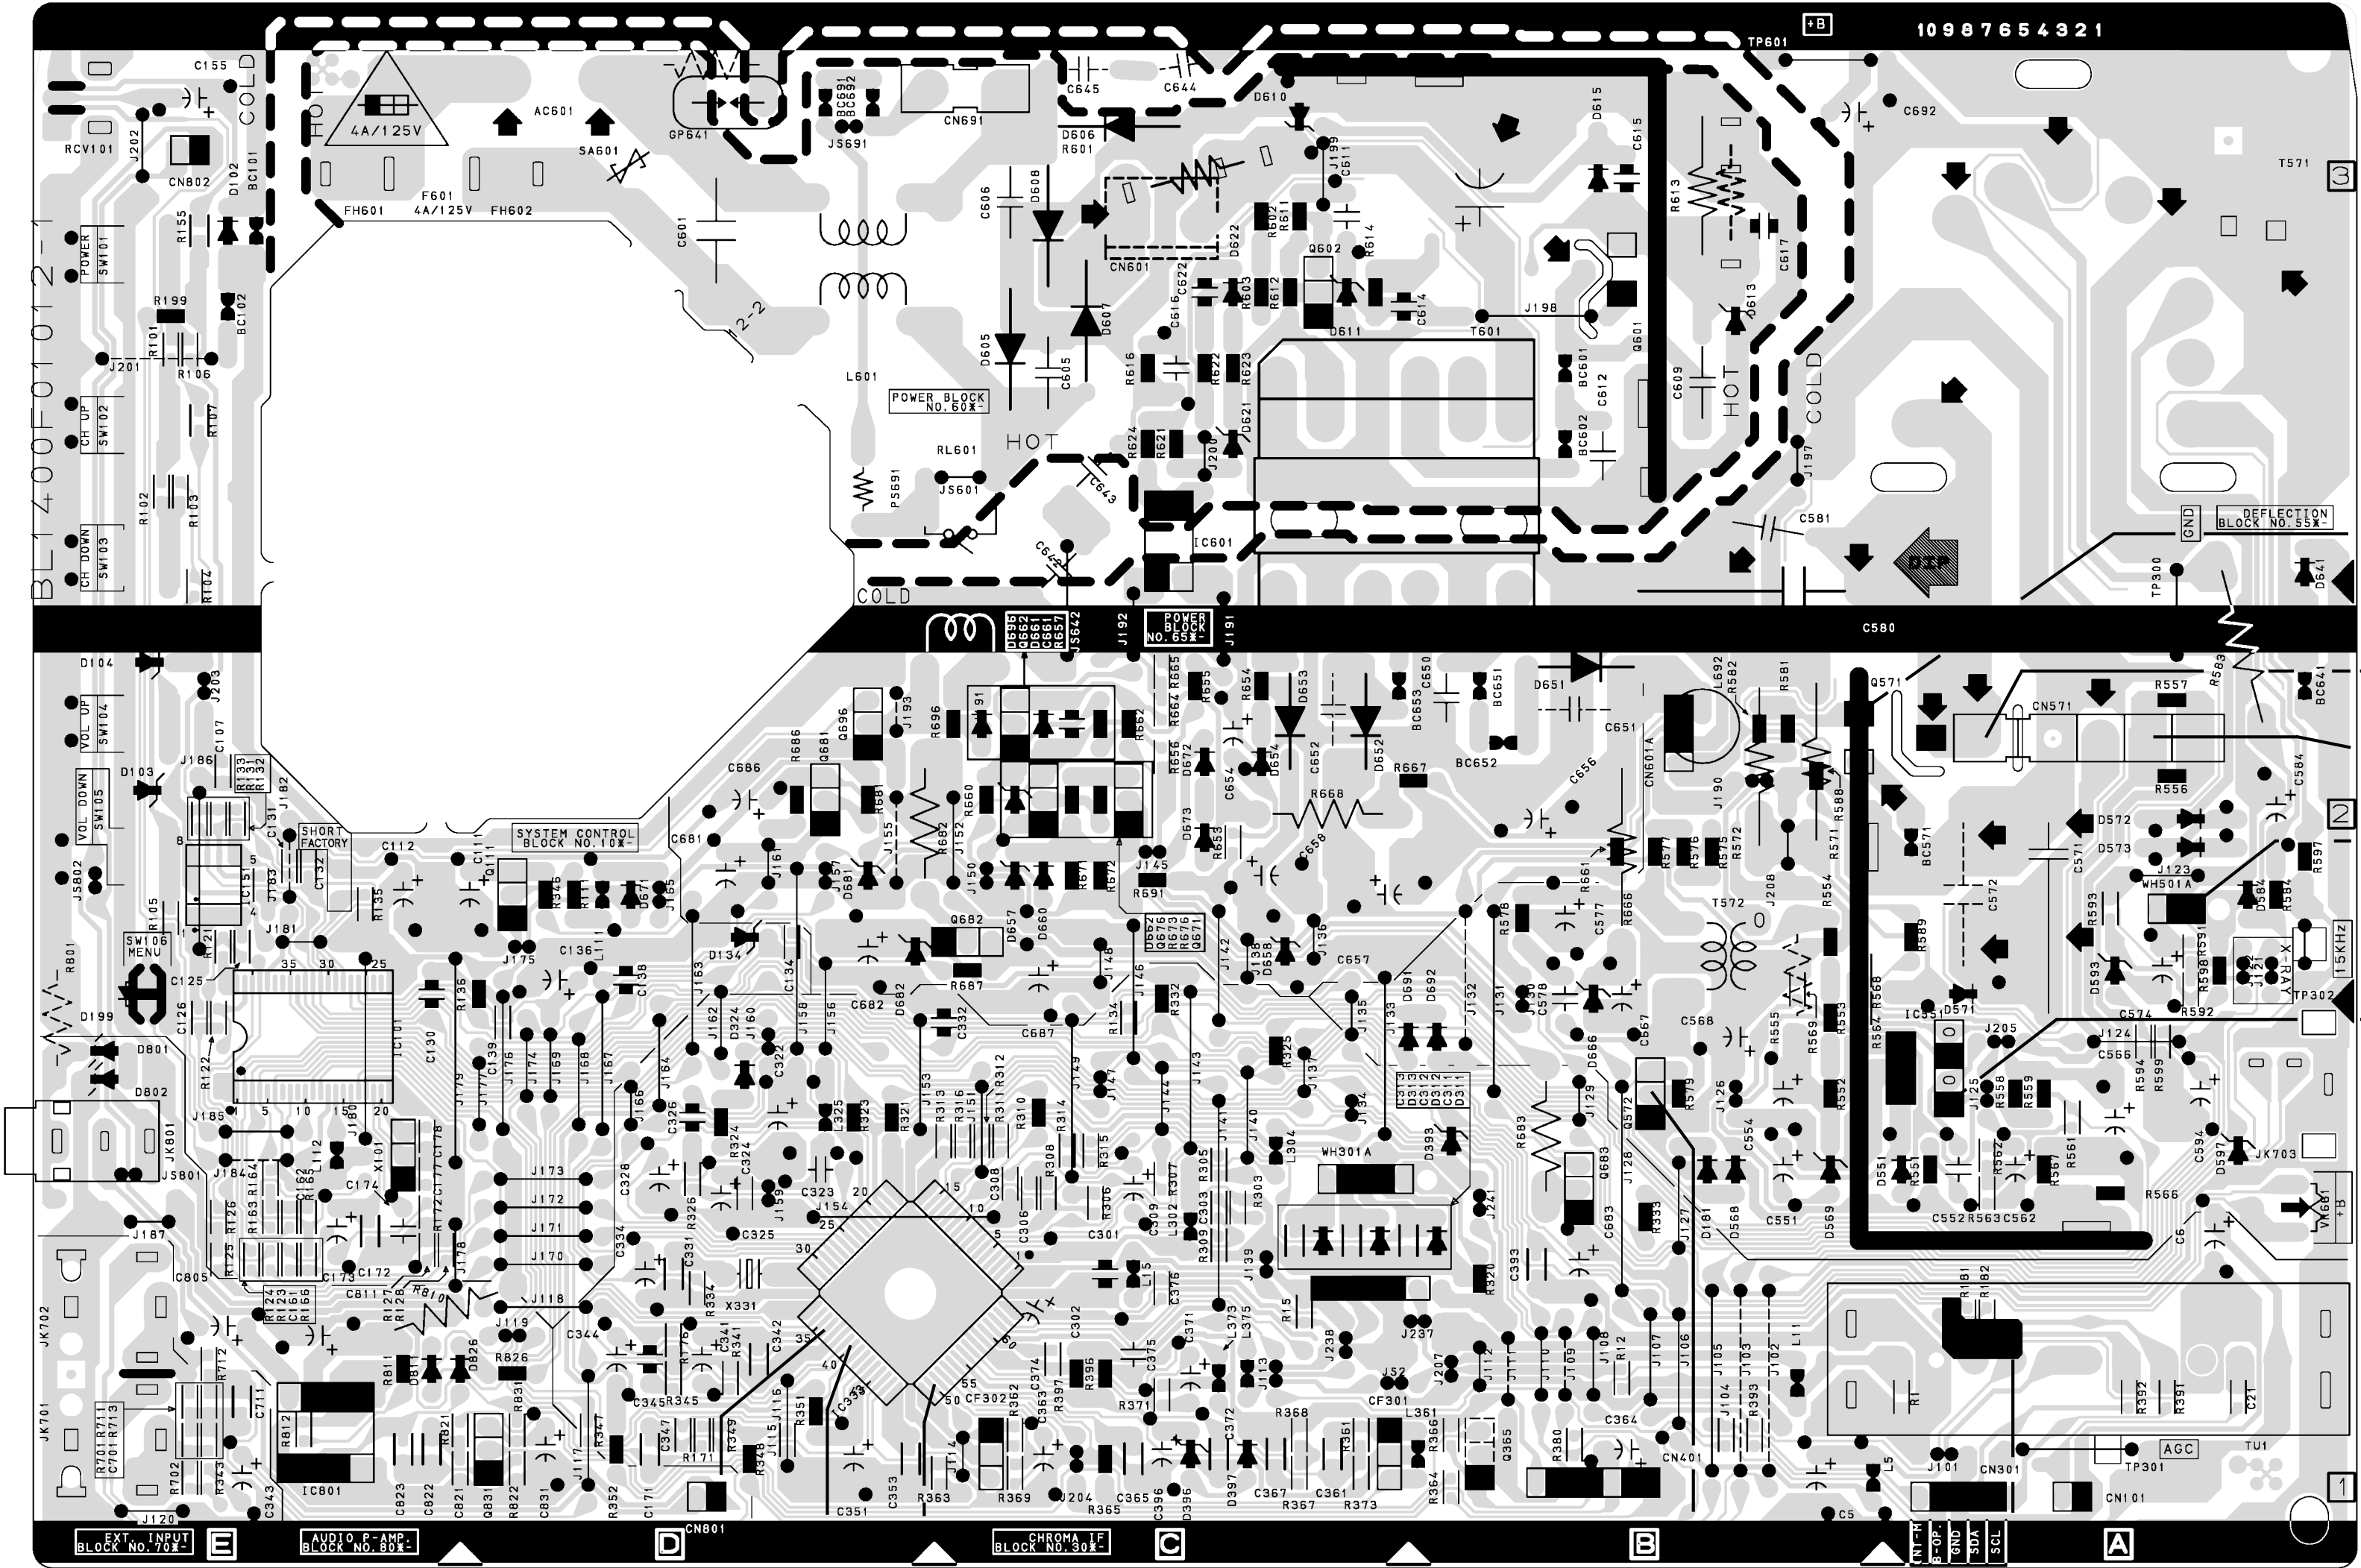

CRT CBA Top View

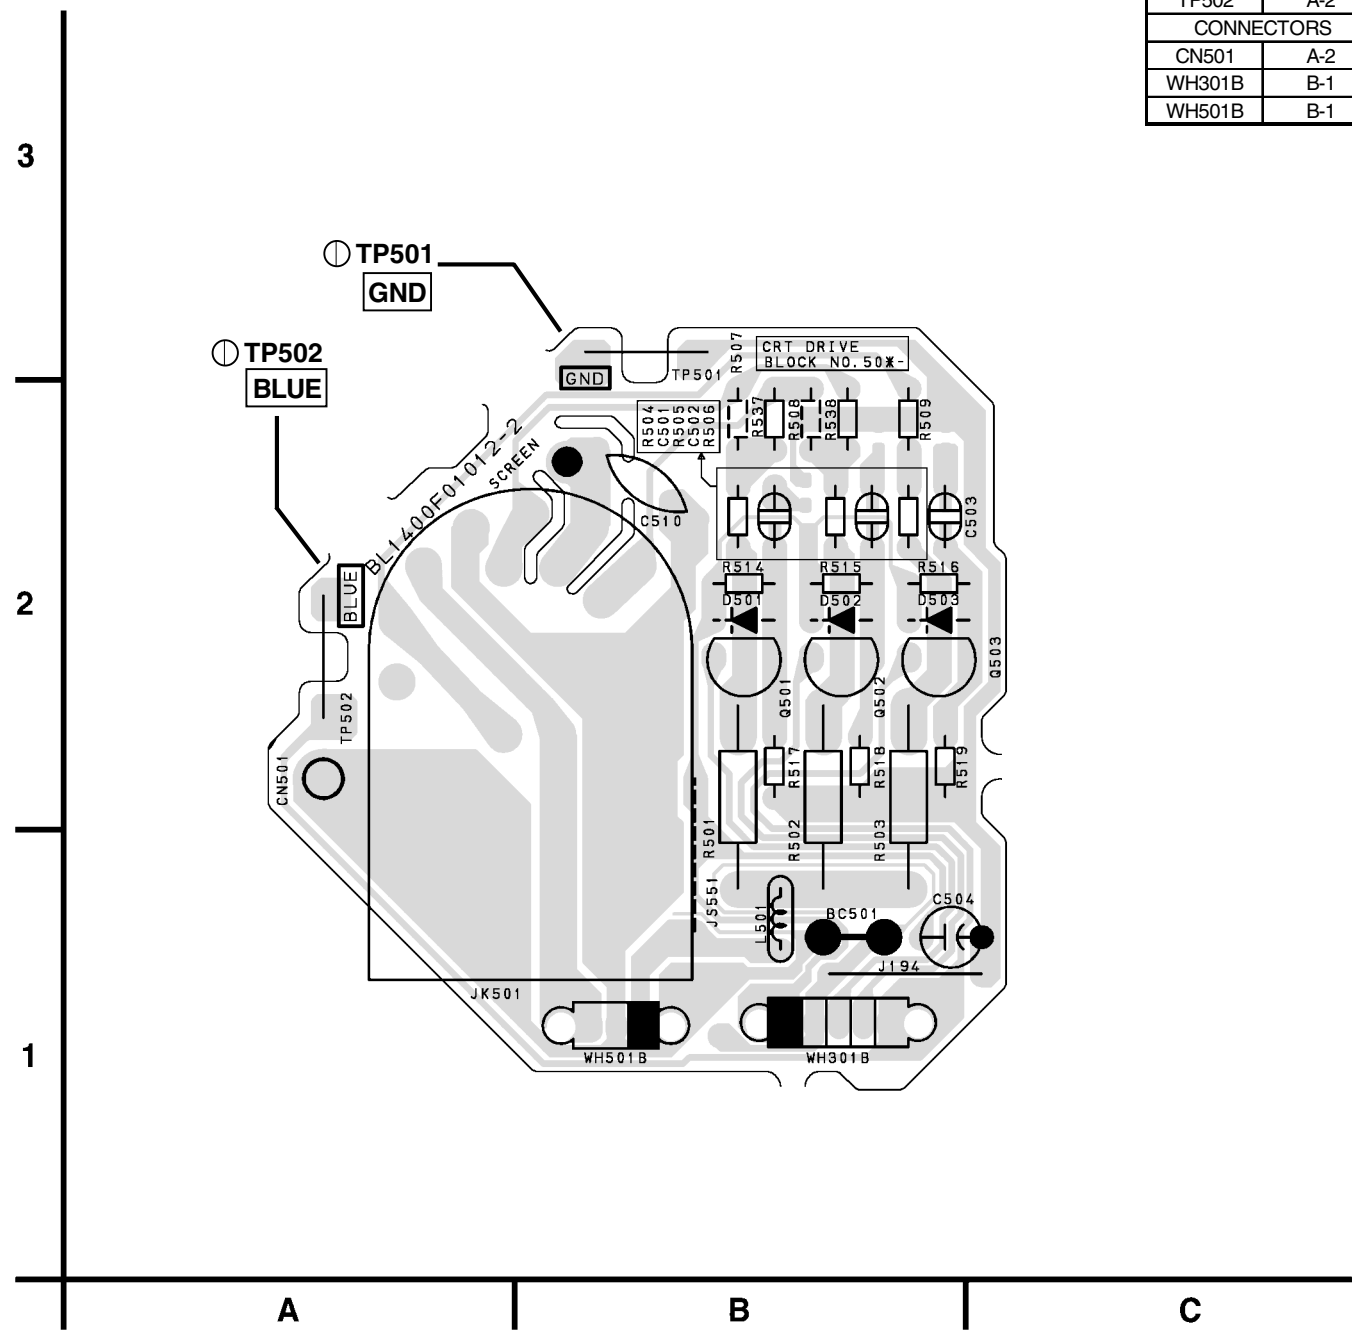

CRT CBA Bottom View

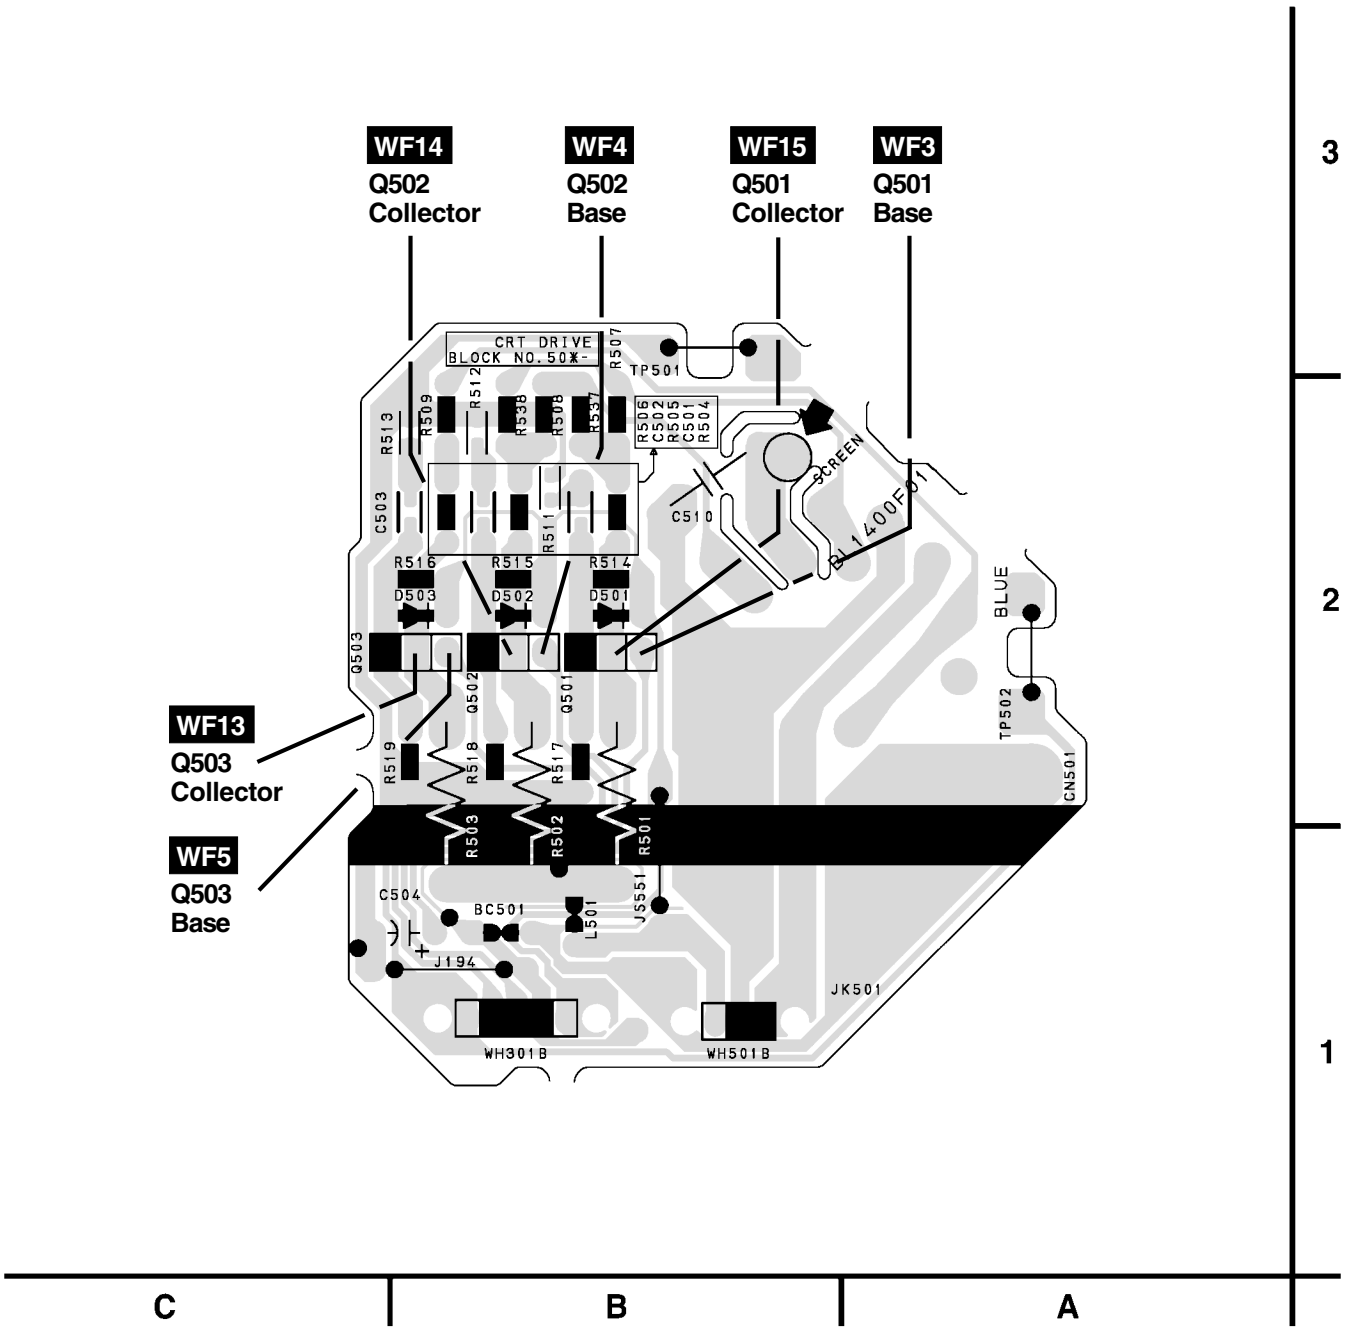

CRT CBA	
Ref No.	Position
TRANSISTORS	
Q501	B-2
Q502	B-2
Q503	C-2
TEST POINTS	
TP501	B-3
TP502	A-2
CONNECTORS	
CN501	A-2
WH301B	B-1
WH501B	B-1

PARTS LIST

PRODUCT SAFETY NOTE: Products marked with a ▲ have special characteristics important to safety. Before replacing any of these components, read carefully the product safety notice in this service manual. Don't degrade the safety of the product through improper servicing.

NOTES:

- Parts that not assigned part numbers (-----) are not available.
- Tolerance of Capacitors and Resistors are noted with the following symbols.
 C.....±0.25% D.....±0.5% F.....±1%
 G.....±2% J.....±5% K.....±10%
 M.....±20% N.....±30% Z.....+80/-20%
- This parts list only different parts. For all other parts, see original service manual model ST413B.
- Comparison chart of Models and Marks:

Model	Mark
6413TB	A
TVK131	B
W6413TB	C

[MECHANICAL PARTS]

Ref.No.	Mark	Description	Part No.
A1X	A,B	FRONT CABINET ASSEMBLY	0EM201385
A1X	C	FRONT CABINET ASSEMBLY	0EM201428
A-1	A,B	FRONT CABINET	0EM000485
A-1	C	FRONT CABINET	0EM201429
A-3	A,B	CONTROL PLATE	0EM301443
A-3	C	CONTROL PLATE	0EM301481
A2X	A	REAR CABINET ASSEMBLY	0EM201386
A2X	B	REAR CABINET ASSEMBLY	0EM201412
A2X	C	REAR CABINET ASSEMBLY	0EM201430
A-2	A,B	REAR CABINET	0EM000481
A-2	C	REAR CABINET	0EM201431
A-4▲	A	RATING LABEL	0EM406169
A-4▲	B	RATING LABEL	0EM406266
A-4▲	C	RATING LABEL	0EM406312
B-2		M5 CRT SCREW(B)	0VM403923
B-9	A,B	CHASSIS NO. LABEL	0EM406181
B-9	C	CHASSIS NO. LABEL	0EM406227
S-1	A	CARTON	0EM301444
S-1	B	CARTON	0EM301473
S-1	C	CARTON	0EM301482
S-5	A	SERIAL NO. LABEL	0EM406170
S-5	B	SERIAL NO. LABEL	0EM406267
S-5	C	SERIAL NO. LABEL	0EM406313
S-7	B	LABEL, EAS(H3761UD) MAKER NO.ZLLFNSLE1	0VM410203
X-1	A,B	REMOCON UNIT 130/ERC001/N0108UD or	N0108UD
	A,B	REMOCON UNIT 130/ERC001/N0132UD	N0132UD

Ref.No.	Mark	Description	Part No.
X-1	C	REMOCON UNIT 130/ERC001/N0112UD or	N0112UD
	C	REMOCON UNIT 130/ERC001/N0133UD	N0133UD
X-4▲	A	OWNER'S MANUAL(E)/(S) L1402UC:ENGLISH/SPANISH	0EMN01764
X-4▲	B	OWNER'S MANUAL(E)/(S):ENGLISH/SPANISH	0EMN01773
X-4▲	C	OWNER'S MANUAL(E)/(S):ENGLISH/SPANISH	0EMN01791
X-9		RETURN STOP SHEET	0VM408870A
CLN1	C	WIRE ASSEMBLY FM ANTENNA	WX1L1003-001

[ELECTRICAL PARTS]

MCV CBA

Ref.No.	Mark	Description	Part No.
	A,B C	MCV CBA (MMA-318) MCV CBA (MMA-323) Consists of the following	0ESA04060 0ESA04089
		Main CBA (MCV-A) CRT CBA (MCV-B)	----- -----

Main CBA

Ref.No.	Mark	Description	Part No.
		Main CBA Consists of the following	-----
C21	C	CHIP CERAMIC CAP. B K 0.01µF/50V	CHD1JKB0B103
C113		CERAMIC CAP.(AX) F Z 0.01µF/25V	CDA1EZT0F103
C 302		ELECTROLYTIC CAP. 220µF/10V M or	CE1AMZPTL221
		ELECTROLYTIC CAP. 220µF/10V M	CE1AMZPDL221
C343		ELECTROLYTIC CAP. 0.1µF/50V M or	CE1JMASDLR10
		ELECTROLYTIC CAP. 0.1µF/50V M or	CE1JMASDLR01
		ELECTROLYTIC CAP. 0.1µF/50V M or	CE1JMASTLR10
		ELECTROLYTIC CAP. 0.1µF/50V M	CE1JMASTLR01
C364		ELECTROLYTIC CAP. 2.2µF/50V M or	CE1JMASDL2R2
		ELECTROLYTIC CAP. 2.2µF/50V M	CE1JMASTL2R2
C 361	A,B	CHIP CERAMIC CAP. CH J 680PF/50V	CHD1JJBCH681
C 375		FILM CAP.(P) 0.047µF/50V J or	CMA1JJS00473
		FILM CAP.(P) 0.047µF/50V J or	CA1J473MS029
		FILM CAP.(P) 0.047µF/50V J TV or	CMB1JJS00473
		MYLAR CAP. 0.047µF/50V K	2250473S
C 642▲		SAFETY CAP. 10000PF/250V or	CCG2EMA0F103
▲		SAFETY CAP. F M 0.01µF/250V or	CCG2EMP0F103
▲		CERAMIC CAP. 0.01UF F CS	CCG2HMN0F103
C 643▲		SAFETY CAP. 10000PF/250V or	CCG2EMA0F103
▲		SAFETY CAP. F M 0.01µF/250V or	CCG2EMP0F103
▲		CERAMIC CAP. 0.01UF F CS	CCG2HMN0F103
C701		CHIP CERAMIC CAP. CH J 100pf/50V	CHD1JJBCH101
C711		CERAMIC CAP.(AX) X K 3300pf/16V	CDA1CKT0X332
CN101	C	STRAIGHT CONNECTOR BASE 00 8283 0212 00 000 or	J383C02UG002
	C	STRAIGHT PIN HEADER, 2P 173981-2	1770258
D 393		ZENER DIODE MTZJT-775.6B	QDTB0MTZJ5R6
D801		PCB JUMPER D0.6-P5.0	JW5.0T
D802		CARBON RES. 1/2W J 100 Ω or	RCX2JZQZ0101
		CARBON RES. 1/2W J 100 Ω	RCX2101KA013
L 11	A,B	PCB JUMPER D0.6-P5.0	JW5.0T

Ref.No.	Mark	Description	Part No.
L 11	C	INDUCTOR 0.47μH-J-26T or	LLAXJATTUR47
	C	INDUCTOR 0.47μH-K-26T	LLAXKATTUR47
L 373	A,B	INDUCTOR 3.3μH-J-26T or	LLAXJATTU3R3
	A,B	INDUCTOR 3.3μH-K-26T	LLAXKDTKA3R3
L 375	C	INDUCTOR 4.7μH-J-26T or	LLAXJATTU4R7
	C	INDUCTOR 4.7μH-K-26T	LLAXKDTKA4R7
IC 101▲		IC:TV MICOM M3727GM8-054FP	QSZAA0SMB054
IC 333▲		IC:CHROMA/IF 1 CHIP M61206FP-61 or	QSZAB0RMB011
▲		IC:CHROMA/IF 1 CHIP M61206FP	QSZAA0RMB011
R12	C	CHIP RES. 1/10W J 0 Ω	RRXAJB5Z0000
R165	A,B	CHIP RES. 1/10W J 0 Ω	RRXAJB5Z0000
R166	C	CHIP RES. 1/10W J 0 Ω	RRXAJB5Z0000
R 325		CARBON RES. 1/4W J 180k Ω or	RCX4JATZ0184
		CARBON RES. 1/6W J 180k Ω	RCX6JATZ0184
R343		CHIP RES.(1608) 1/10W J 100 Ω	RRXAJB5Z0101
R364		CHIP RES.(1608) 1/10W J 100 Ω	RRXAJB5Z0101
R380		CHIP RES.(1608) 1/10W J 100 Ω	RRXAJB5Z0101
R 562		CHIP RES.(1608) 1/10W J 2.7k Ω	RRXAJB5Z0272
R701		CHIP RES.(1608) 1/10W J 75 Ω	RRXAJB5Z0750
R702		CHIP RES. 1/10W J 0 Ω	RRXAJB5Z0000
R711		CHIP RES.(1608) 1/10W J 47k Ω	RRXAJB5Z0473
R712		CHIP RES.(1608) 1/10W J 1k Ω	RRXAJB5Z0102
AC601	A,B	AC CORD WAC0172AS006 or	WAC0172AS006
	A,B	AC CORD WAC0172LTE01 or	WAC0172LTE01
	A,B	AC CORD LA-2366	WAC0172LW006
AC601	C	AC CORD 9806191 or	WAC9172AS002
	C	AC CORD LA-2144	WAC9172LW002
B-10		JACK HOLDER	OEM404325
CF 1	C	40.4M TRAP MKT40.4MA110P	FBE406PMR001
CF302	A,B	4.5M FILTER LTH4.5MCB or	FBB455PLN001
	A,B	CERAMIC FILTER SFSRA4M50CF00-B0 or	FBB455PMR004
	A,B	CERAMIC FILTER 4.5MHZ	FBB455PMS001
CF 302	C	4.5M FILTER SFE4.5MC	FBB455PMR005
JK701		RCA JACK 1P AV-8.4-9Y	JXRL010RP010
JK702		RCA JACK 1P AV-8.4-9W	JXRL010RP011
JK801		EARPHONE JACK HTJ-035-1ZEBTZ or	JYSL030GE001
		EARPHONE JACK HSJ1403-01-010 or	JYSL030HD002
		EARPHONE JACK MSJ-035-12APC or	JYSL030LY001
		EARPHONE JACK LGY6501-0600	JYSL030SR001
SF 1		SAW FILTER SAFGP45M7VHBZL1B03 or	FBB456PMR003
		SAW FILTER SAFGP45M7VHBZL2B03	FBB456PMR004
TU 1	A,B	TUNER TEDH9-300A or	UTUNNTUAL025
	A,B	TUNER B8095AP	UTUNNTUSP018
TU1	C	TUNER UNIT TEDH9-930A	UTUNNTUAL026

6413TB/TK131/M6413TB


L1302UC/06UG/08UJ

Symphonic

SERVICE MANUAL

13" COLOR TELEVISION

ST413B

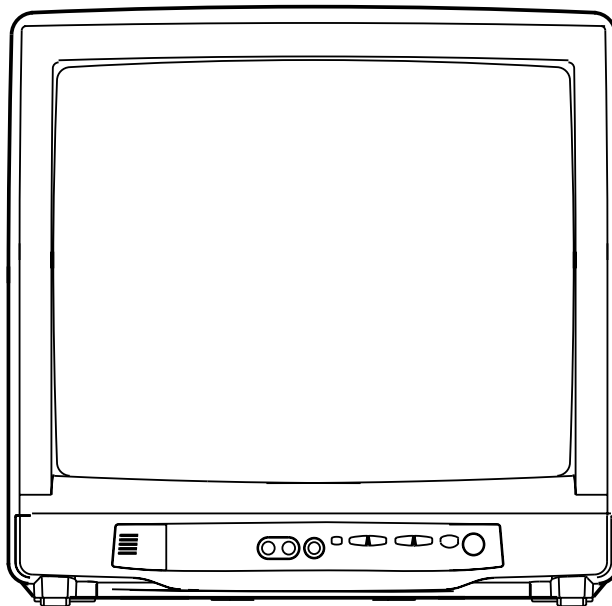

IMPORTANT SAFETY NOTICE

Proper service and repair is important to the safe, reliable operation of all Funai Equipment. The service procedures recommended by Funai and described in this service manual are effective methods of performing service operations. Some of these service special tools should be used when and as recommended.

It is important to note that this service manual contains various CAUTIONS and NOTICES which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It also is important to understand that these CAUTIONS and NOTICES ARE NOT EXHAUSTIVE. Funai could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done or of the possible hazardous consequences of each way. Consequently, Funai has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by Funai must first use all precautions thoroughly so that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.

TABLE OF CONTENTS

Specifications	1-1	CBA Views and Test Points	7-9
Important Safety Precautions.....	2-1	Wave Forms	8-1
Standard Notes for Servicing	3-1	Wiring Diagram.....	9-1
Disassembly Instructions	4-1	IC Pin Fuction.....	10-1
Electrical Adjustment Instructions	5-1	Cabinet Exploded View	11-1
Block Diagram.....	6-1	Packing Exploded View	11-3
Schematic Diagram / CBA's and Test Points	7-1	Mechanical Parts List	12-1
Schematic Diagram	7-3	Electrical Parts List.....	13-1

SPECIFICATIONS

< TUNER >

ANT. Input ----- 75ohm Unbal., F type
Reference Level ----- 20Vp-p (CRT Green Cathode)
Test Input Signal ----- 400Hz 30% modulation

Description	Condition	Unit	Nominal	Limit
1. Intermediate Freq.	Picture	MHz	45.75	—
	Sound	MHz	41.25	—
2. Peak Picture Sens	VHF	dBμV	15	30
	CATV	dBμV	15	30
	UHF	dBμV	15	40
3. AFT Pull In Range (10mV input)	—	MHz	± 2.0	± 0.7

< DEFLECTION >

Description	Condition	Unit	Nominal	Limit
1. Deflection Freq.	Horizontal	KHz	15.734	—
	Vertical	Hz	60	—
2. Linearity	Horizontal	%	—	± 15
	Vertical	%	—	± 10
3. Over Scan	—	%	10	—
4. High Voltage	—	KV	23	—

< VIDEO & CHROMA >

Description	Condition	Unit	Nominal	Limit
1. Misconvergence	Center	mm	—	0.3
	Side	mm	—	1.2
	Corner	mm	—	1.5
2. Brightness	APL 100%	Ft-L	60	40
3. Color Temperature	—	°K	9200°K	—
4. Resolution	Horizontal	Line	250	—
	Vertical	Line	300	—

< AUDIO >

All items are measured across 8Ω load at speaker output terminal.

Description	Condition	Unit	Nominal	Limit
1. Audio Output Power	10% THD	W	1	0.8
2. Audio Distortion (w/LPF)	500mW	%	2	7
3. Audio Freq. Response	−3dB	Hz	100~11K	—

Note:

Nominal specifications represent the design specifications. All units should be able to approximate these. Some will exceed and some may drop slightly below these specifications. Limit specifications represent the absolute worst condition that still might be considered acceptable. In no case should a unit fail to meet limit specifications.

IMPORTANT SAFETY PRECAUTIONS

Prior to shipment from the factory, our products are strictly inspected for recognized product safety and electrical codes of the countries in which they are to be sold. However, in order to maintain such compliance, it is equally important to implement the following precautions when a set is being serviced.

Safety Precautions for TV Circuit

1. Before returning an instrument to the customer, always make a safety check of the entire instrument, including, but not limited to, the following items:


a. Be sure that no built-in protective devices are defective and have been defeated during servicing. (1) Protective shields are provided on this chassis to protect both the technician and the customer. Correctly replace all missing protective shields, including any removed for servicing convenience. (2) When reinstalling the chassis and/or other assembly in the cabinet, be sure to put back in place all protective devices, including but not limited to, non-metallic control knobs, insulating fishpapers, adjustment and compartment covers/shields, and isolation resistor/capacitor networks. **Do not operate this instrument or permit it to be operated without all protective devices correctly installed and functioning. Servicers who defeat safety features or fail to perform safety checks may be liable for any resulting damage.**

b. Be sure that there are no cabinet openings through which an adult or child might be able to insert their fingers and contact a hazardous voltage. Such openings include, but are not limited to, (1) spacing between the picture tube and the cabinet mask, (2) excessively wide cabinet ventilation slots, and (3) an improperly fitted and/or incorrectly secured cabinet back cover.

c. Antenna Cold Check - With the instrument AC plug removed from any AC source, connect an electrical jumper across the two AC plug prongs. Place the instrument AC switch in the on position. Connect one lead of an ohmmeter to the AC plug prongs tied together and touch the other ohmmeter lead in turn to each tuner antenna input exposed terminal screw and, if applicable, to the coaxial connector. If the measured resistance is less than 1.0 megohm or greater than 5.2 megohm, an abnormality exists that must be corrected before the instrument is returned to the customer. Repeat this test with the instrument AC switch in the off position.

d. Leakage Current Hot Check - With the instrument completely reassembled, plug the AC line cord directly into a 120V AC outlet. (Do not use an isolation transformer during this test.) Use a leakage

current tester or a metering system that complies with American National Standards Institute (ANSI) C101.1 Leakage Current for Appliances and Underwriters Laboratories (UL) 1410, (50.7). With the instrument AC switch first in the on position and then in the off position, measure from a known earth ground (metal water pipe, conduit, etc.) to all exposed metal parts of the instrument (antennas, handle brackets, metal cabinet, screw heads, metallic overlays, control shafts, etc.), especially any exposed metal parts that offer an electrical return path to the chassis. Any current measured must not exceed 0.5 milli-ampere. Reverse the instrument power cord plug in the outlet and repeat the test.

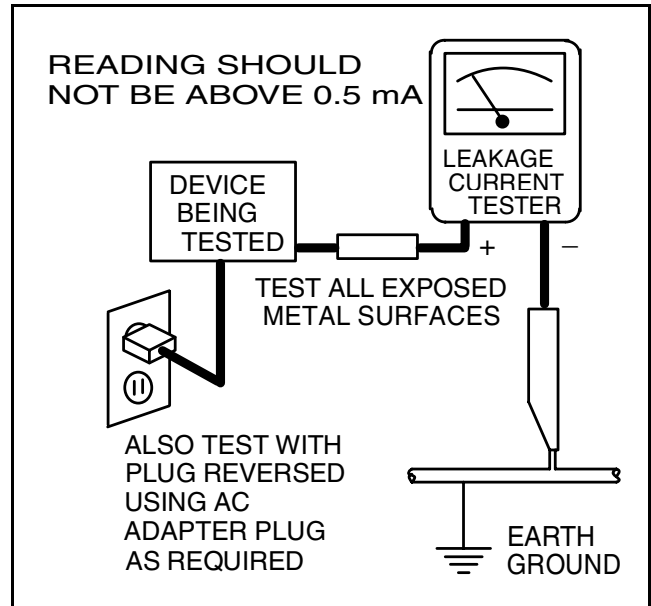

ANY MEASUREMENTS NOT WITHIN THE LIMITS SPECIFIED HEREIN INDICATE A POTENTIAL SHOCK HAZARD THAT MUST BE ELIMINATED BEFORE RETURNING THE INSTRUMENT TO THE CUSTOMER OR BEFORE CONNECTING THE ANTENNA OR ACCESSORIES.

e. X-Radiation and High Voltage Limits - Because the picture tube is the primary potential source of X-radiation in solid-state TV receivers, it is specially constructed to prohibit X-radiation emissions. For continued X-radiation protection, the replacement picture tube must be the same type as the original. Also, because the picture tube shields and mounting hardware perform an X-radiation protection function, they must be correctly in place. High voltage must be measured each time servicing

is performed that involves B+, horizontal deflection or high voltage. Correct operation of the X-radiation protection circuits also must be reconfirmed each time they are serviced. (X-radiation protection circuits also may be called "horizontal disable" or "hold down.") Read and apply the high voltage limits and, if the chassis is so equipped, the X-radiation protection circuit specifications given on instrument labels and in the Product Safety & X-Radiation Warning note on the service data chassis schematic. High voltage is maintained within specified limits by close tolerance safety-related components/adjustments in the high-voltage circuit. If high voltage exceeds specified limits, check each component specified on the chassis schematic and take corrective action.

2. Read and comply with all caution and safety-related notes on or inside the receiver cabinet, on the receiver chassis, or on the picture tube.

3. Design Alteration Warning - Do not alter or add to the mechanical or electrical design of this TV receiver. Design alterations and additions, including, but not limited to circuit modifications and the addition of items such as auxiliary audio and/or video output connections, might alter the safety characteristics of this receiver and create a hazard to the user. Any design alterations or additions will void the manufacturer's warranty and may make you, the servicer, responsible for personal injury or property damage resulting therefrom.


4. Picture Tube Implosion Protection Warning

- The picture tube in this receiver employs integral implosion protection. For continued implosion protection, replace the picture tube only with one of the same type number. Do not remove, install, or otherwise handle the picture tube in any manner without first putting on shatterproof goggles equipped with side shields. People not so equipped must be kept safely away while picture tubes are handled. Keep the picture tube away from your body. Do not handle the picture tube by its neck. Some "in-line" picture tubes are equipped with a permanently attached deflection yoke; because of potential hazard, do not try to remove such "permanently attached" yokes from the picture tube.

5. Hot Chassis Warning -

- a. Some TV receiver chassis are electrically connected directly to one conductor of the AC power cord and may be safety-serviced without an isolation transformer only if the AC power plug is inserted so that the chassis is connected to the ground side of the AC power source. To confirm that the AC power plug is inserted correctly, with an AC voltmeter, measure between the chassis and a known earth

ground. If a voltage reading in excess of 1.0V is obtained, remove and reinsert the AC power plug in the opposite polarity and again measure the voltage potential between the chassis and a known earth ground.

- b. Some TV receiver chassis normally have 85V AC(RMS) between chassis and earth ground regardless of the AC plug polarity. This chassis can be safety-serviced only with an isolation transformer inserted in the power line between the receiver and the AC power source, for both personnel and test equipment protection.
- c. Some TV receiver chassis have a secondary ground system in addition to the main chassis ground. This secondary ground system is not isolated from the AC power line. The two ground systems are electrically separated by insulation material that must not be defeated or altered.
6. Observe original lead dress. Take extra care to assure correct lead dress in the following areas: a. near sharp edges, b. near thermally hot parts-be sure that leads and components do not touch thermally hot parts, c. the AC supply, d. high voltage, and e. antenna wiring. Always inspect in all areas for pinched, out of place, or frayed wiring. Check AC power cord for damage.
7. Components, parts, and/or wiring that appear to have overheated or are otherwise damaged should be replaced with components, parts, or wiring that meet original specifications. Additionally, determine the cause of overheating and/or damage and, if necessary, take corrective action to remove any potential safety hazard.
- 8. Product Safety Notice** - Some electrical and mechanical parts have special safety-related characteristics which are often not evident from visual inspection, nor can the protection they give necessarily be obtained by replacing them with components rated for higher voltage, wattage, etc.. Parts that have special safety characteristics are identified by a () on schematics and in parts lists. Use of a substitute replacement that does not have the same safety characteristics as the recommended replacement part might create shock, fire, and/or other hazards. The product's safety is under review continuously and new instructions are issued whenever appropriate. Prior to shipment from the factory, our products are strictly inspected to confirm they comply with the recognized product safety and electrical codes of the countries in which they are to be sold. However, in order to maintain such compliance, it is equally important to implement the following precautions when a set is being serviced.

Precautions during Servicing

A. Parts identified by the (▲) symbol are critical for safety.

Replace only with part number specified.

B. In addition to safety, other parts and assemblies are specified for conformance with regulations applying to spurious radiation. These must also be replaced only with specified replacements.

Examples: RF converters, RF cables, noise blocking capacitors, and noise blocking filters, etc.

C. Use specified internal wiring. Note especially:

- 1) Wires covered with PVC tubing
- 2) Double insulated wires
- 3) High voltage leads

D. Use specified insulating materials for hazardous live parts. Note especially:

- 1) Insulation Tape
- 2) PVC tubing
- 3) Spacers
- 4) Insulators for transistors.

E. When replacing AC primary side components (transformers, power cord, etc.), wrap ends of wires securely about the terminals before soldering.

F. Observe that the wires do not contact heat producing parts (heatsinks, oxide metal film resistors, fusible resistors, etc.)

G. Check that replaced wires do not contact sharp edged or pointed parts.

H. When a power cord has been replaced, check that 5~6 kg of force in any direction will not loosen it.

I. Also check areas surrounding repaired locations.

J. Use care that foreign objects (screws, solder drop-lets, etc.) do not remain inside the set.

K. Crimp type wire connector

The power transformer uses crimp type connectors which connect the power cord and the primary side of the transformer. When replacing the transformer, follow these steps carefully and precisely to prevent shock hazards.

Replacement procedure

- 1) Remove the old connector by cutting the wires at a point close to the connector.

Important: Do not re-use a connector (discard it).

- 2) Strip about 15 mm of the insulation from the ends of the wires. If the wires are stranded, twist the strands to avoid frayed conductors.

- 3) Align the lengths of the wires to be connected. Insert the wires fully into the connector.

- 4) Use the crimping tool to crimp the metal sleeve at the center position. Be sure to crimp fully to the complete closure of the tool.

L. When connecting or disconnecting the internal connectors, first, disconnect the AC plug from the AC supply outlet.

Safety Check after Servicing

Examine the area surrounding the repaired location for damage or deterioration. Observe that screws, parts and wires have been returned to original positions. Afterwards, perform the following tests and confirm the specified values in order to verify compliance with safety standards.

1. Clearance Distance

When replacing primary circuit components, confirm specified clearance distance (d) and (d') between soldered terminals, and between terminals and surrounding metallic parts. (See Fig. 1)

Table 1 : Ratings for selected area

AC Line Voltage	Region	Clearance Distance (d) (d')
110 to 130 V	USA or CANADA	$\geq 3.2 \text{ mm}$ (0.126 inches)

Note: This table is unofficial and for reference only. Be sure to confirm the precise values.

2. Leakage Current Test

Confirm the specified (or lower) leakage current between B (earth ground, power cord plug prongs) and externally exposed accessible parts (RF terminals, antenna terminals, video and audio input and output terminals, microphone jacks, earphone jacks, etc.) is lower than or equal to the specified value in the table below.



Measuring Method : (Power ON)

Insert load Z between B (earth ground, power cord plug prongs) and exposed accessible parts. Use an AC voltmeter to measure across both terminals of load Z. See Fig. 2 and following table.

Table 2 : Leakage current ratings for selected areas

AC Line Voltage	Region	Load Z	Leakage Current (i)	Earth Ground (B) to:
110 to 130 V	USA	0.15 μ F CAP. & 1.5k Ω RES. connected in parallel	$i \leq 0.5 \text{ mA rms}$	Exposed accessible parts


Note: This table is unofficial and for reference only. Be sure to confirm the precise values.

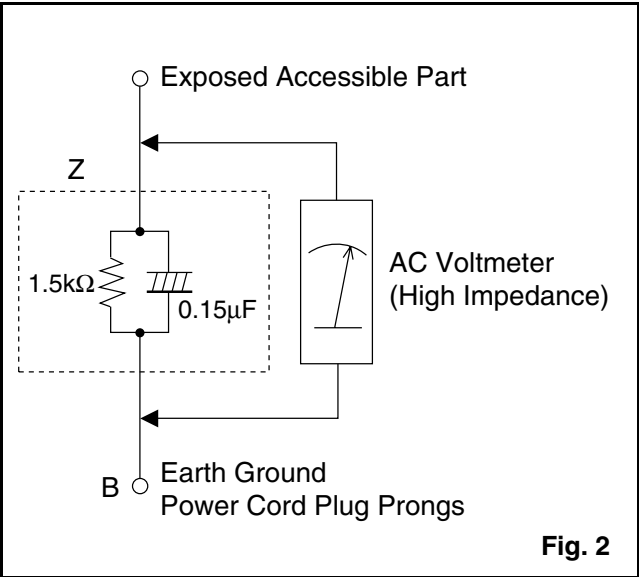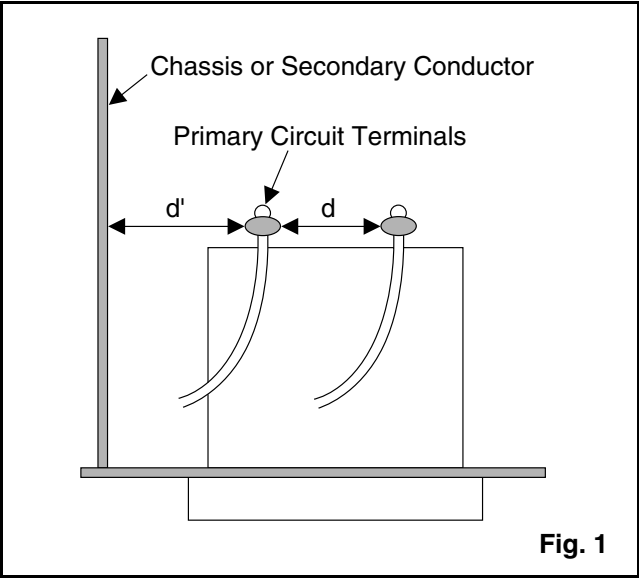


STANDARD NOTES FOR SERVICING

Circuit Board Indications


- a. The output pin of the 3 pin Regulator ICs is indicated as shown.

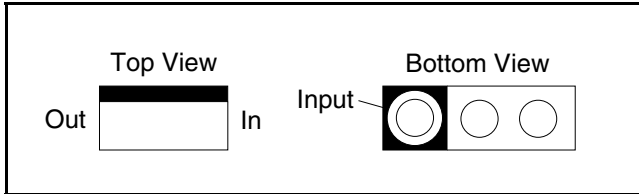

- b. For other ICs, pin 1 and every fifth pin are indicated as shown.

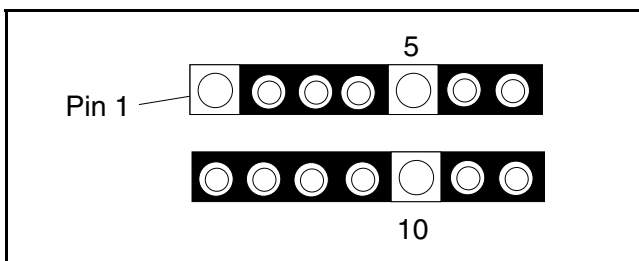

- c. The 1st pin of every male connector is indicated as shown.

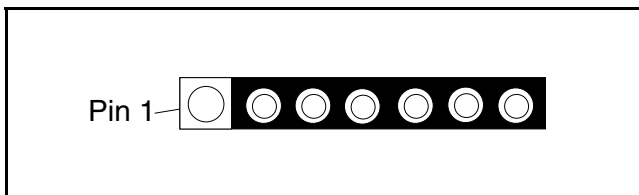

How to Remove / Install Flat Pack-IC

1. Removal

With Hot-Air Flat Pack-IC Desoldering Machine:

- (1) Prepare the hot-air flat pack-IC desoldering machine, then apply hot air to the Flat Pack-IC (about 5 to 6 seconds). (Fig. S-1-1)

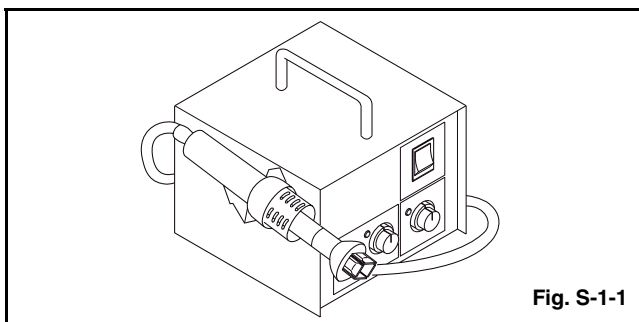


Fig. S-1-1

- (2) Remove the flat pack-IC with tweezers while applying the hot air.
 (3) Bottom of the flat pack-IC is fixed with glue to the CBA; when removing entire flat pack-IC, first apply soldering iron to center of the flat pack-IC and heat up. Then remove (glue will be melted). (Fig. S-1-6)
 (4) Release the flat pack-IC from the CBA using tweezers. (Fig. S-1-6)

Caution:

- Do not supply hot air to the chip parts around the flat pack-IC for over 6 seconds because damage to the chip parts may occur. Put masking tape around the flat pack-IC to protect other parts from damage. (Fig. S-1-2)
- The flat pack-IC on the CBA is affixed with glue, so be careful not to break or damage the foil of each pin or the solder lands under the IC when removing it.


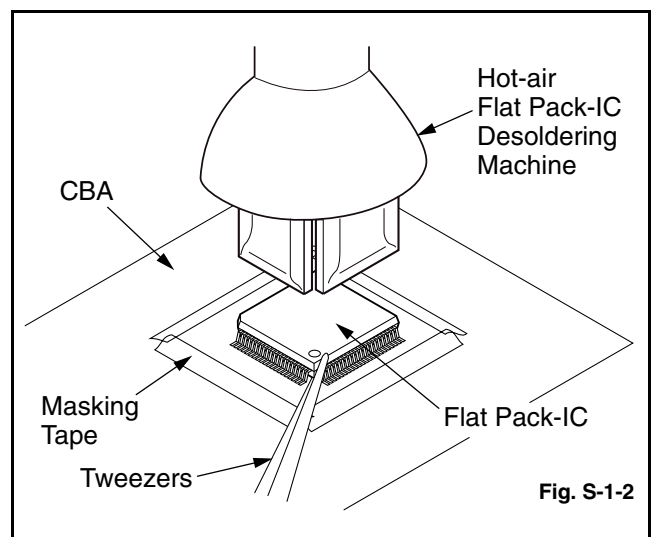



Fig. S-1-2

With Soldering Iron:

- (1) Using desoldering braid, remove the solder from all pins of the flat pack-IC. When you use solder flux which is applied to all pins of the flat pack-IC, you can remove it easily. (Fig. S-1-3)

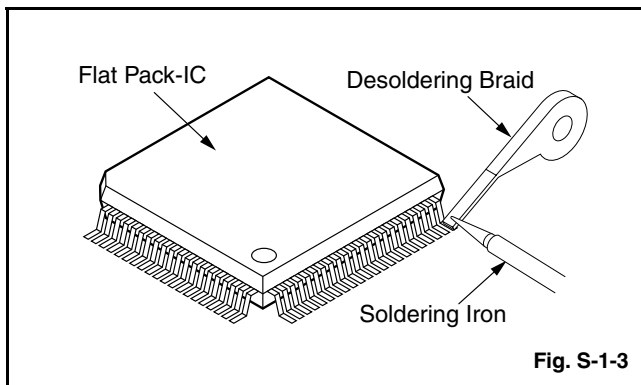

- (2) Lift each lead of the flat pack-IC upward one by one, using a sharp pin or wire to which solder will not adhere (iron wire). When heating the pins, use a fine tip soldering iron or a hot air desoldering machine. (Fig. S-1-4)

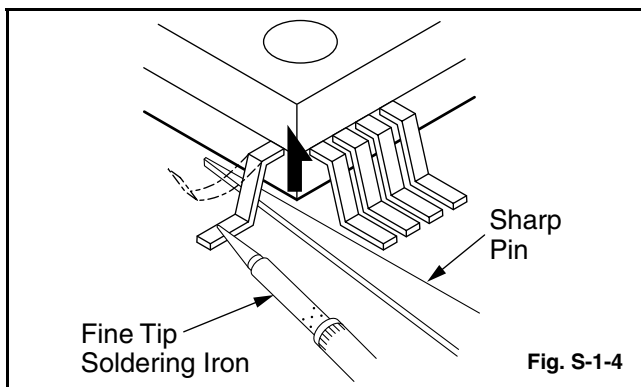

- (3) Bottom of the flat pack-IC is fixed with glue to the CBA; when removing entire flat pack-IC, first apply soldering iron to center of the flat pack-IC and heat up. Then remove (glue will be melted). (Fig. S-1-6)
- (4) Release the flat pack-IC from the CBA using tweezers. (Fig. S-1-6)

With Iron Wire:



- (1) Using desoldering braid, remove the solder from all pins of the flat pack-IC. When you use solder flux which is applied to all pins of the flat pack-IC, you can remove it easily. (Fig. S-1-3)
- (2) Affix the wire to a workbench or solid mounting point, as shown in Fig. S-1-5.
- (3) While heating the pins using a fine tip soldering iron or hot air blower, pull up the wire as the solder melts so as to lift the IC leads from the CBA contact pads as shown in Fig. S-1-5.
- (4) Bottom of the flat pack-IC is fixed with glue to the CBA; when removing entire flat pack-IC, first apply

soldering iron to center of the flat pack-IC and heat up. Then remove (glue will be melted). (Fig. S-1-6)

- (5) Release the flat pack-IC from the CBA using tweezers. (Fig. S-1-6)

Note:


When using a soldering iron, care must be taken to ensure that the flat pack-IC is not being held by glue. When the flat pack-IC is removed from the CBA, handle it gently because it may be damaged if force is applied.

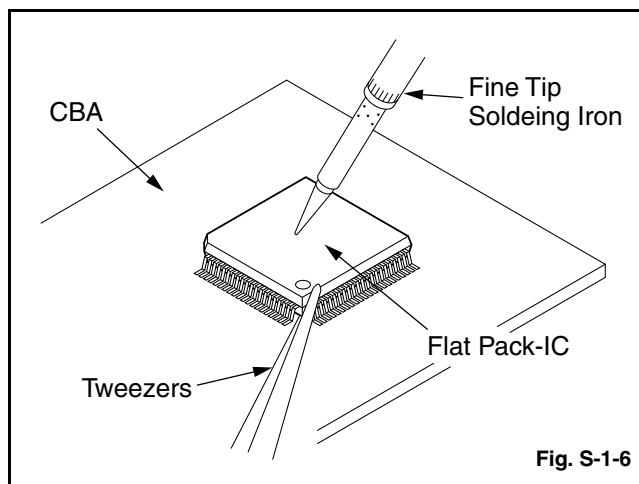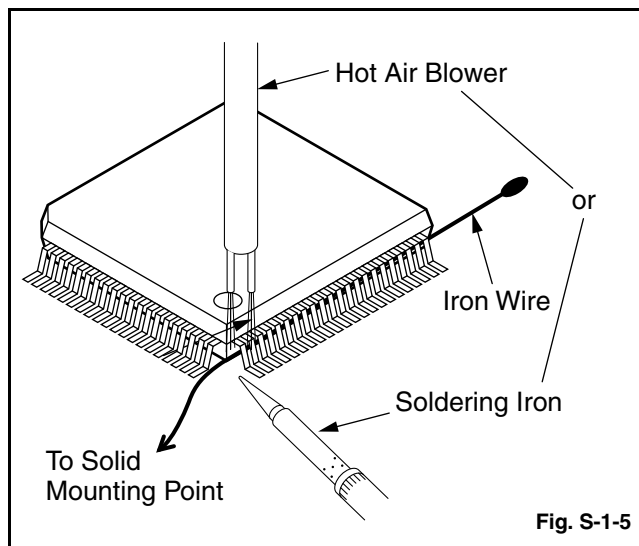

2. Installation

- (1) Using desoldering braid, remove the solder from the foil of each pin of the flat pack-IC on the CBA so you can install a replacement flat pack-IC more easily.
- (2) The "●" mark on the flat pack-IC indicates pin 1. (See Fig. S-1-7.) Be sure this mark matches the 1 on the PCB when positioning for installation. Then pre-solder the four corners of the flat pack-IC. (See Fig. S-1-8.)
- (3) Solder all pins of the flat pack-IC. Be sure that none of the pins have solder bridges.

Example :



Pin 1 of the Flat Pack-IC is indicated by a "●" mark.

Fig. S-1-7

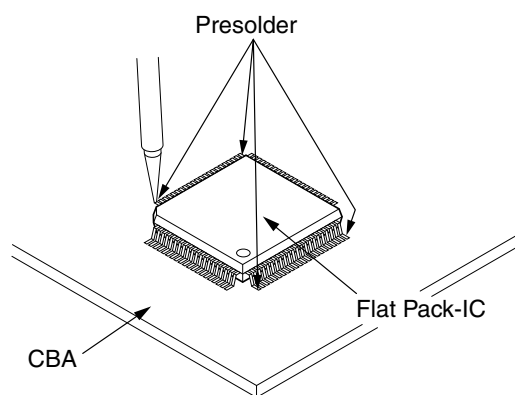


Fig. S-1-8

Instructions for Handling Semiconductors

Electrostatic breakdown of the semiconductors may occur due to a potential difference caused by electrostatic charge during unpacking or repair work.


1. Ground for Human Body

Be sure to wear a grounding band ($1M\Omega$) that is properly grounded to remove any static electricity that may be charged on the body.


2. Ground for Workbench

Be sure to place a conductive sheet or copper plate with proper grounding ($1M\Omega$) on the workbench or other surface, where the semiconductors are to be placed. Because the static electricity charge on clothing will not escape through the body grounding band, be careful to avoid contacting semiconductors with your clothing.

< Incorrect >

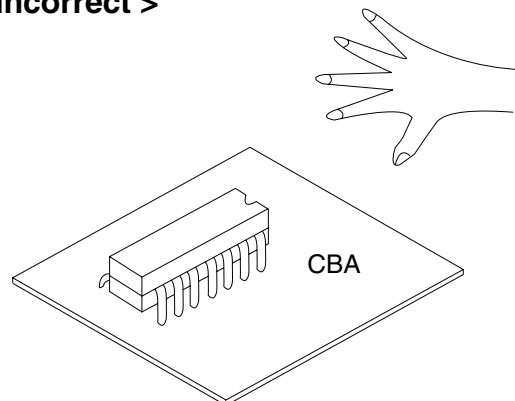

< Correct >

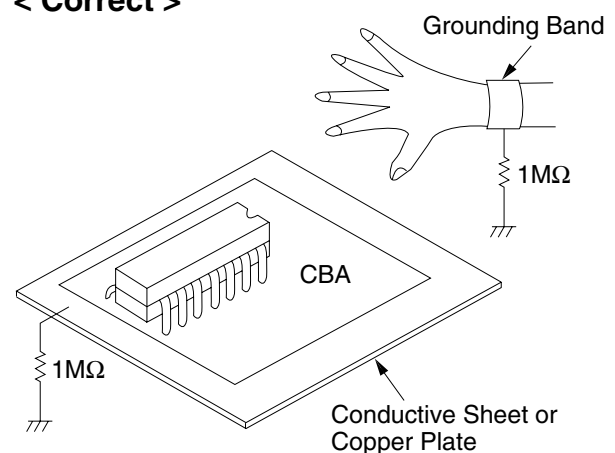


CABINET DISASSEMBLY INSTRUCTIONS

1. Disassembly Flowchart

This flowchart indicates the disassembly steps for the cabinet parts, and the CBA in order to gain access to item(s) to be serviced. When reassembling, follow the steps in reverse order. Bend, route and dress the cables as they were.

Caution !

When removing the CRT, be sure to discharge the Anode Lead of the CRT with the CRT Ground Wire before removing the Anode Cap.

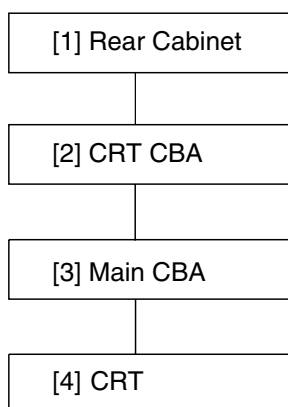

2. Disassembly Method

Step/ Loc. No.	Part	Removal		
		Fig. No.	Remove/*unlock/ release/unplug/ unclamp/desolder	Note
[1]	Rear Cabinet	1,2	4(S-1)	1
[2]	CRT CBA	4,5	CN501	2
[3]	Main CBA	3,5	CN571	3
[4]	CRT	4	4(S-2), Anode Cap	4

↓
①

↓
②

↓
③

↓
④

↓
⑤

Note :

- ①. Order of steps in procedure. When reassembling, follow the steps in reverse order.
These numbers are also used as the Identification (location) No. of parts in figures.
- ②. Parts to be removed or installed.
- ③. Fig. No. showing procedure of part location
- ④. Identification of part to be removed, unhooked, unlocked, released, unplugged, unclamped, or desoldered.

S=Screw, P=Spring, L=Locking Tab, CN=Connector, *=Unhook, Unlock, Release, Unplug, or Desolder
2(S-2) = two Screws (S-2)
- ⑤. Refer to the following "Reference Notes in the Table."





Reference Notes in the Table

1. Removal of the Rear Cabinet. Remove screws 4(S-1), then slide the Rear Cabinet backward.
2. Removal of the CRT CBA. Disconnect CN501 then pull the CRT CBA backward.
3. Removal of the Main CBA. Disconnect CN571 on the Main CBA then slide the Main CBA backward.

Caution !

Discharge the Anode Lead of the CRT with the CRT Ground Wire before removing the Anode Cap.

4. Removal of the CRT. Remove screws 4(S-2) and Anode Cap. then slide the CRT backward.

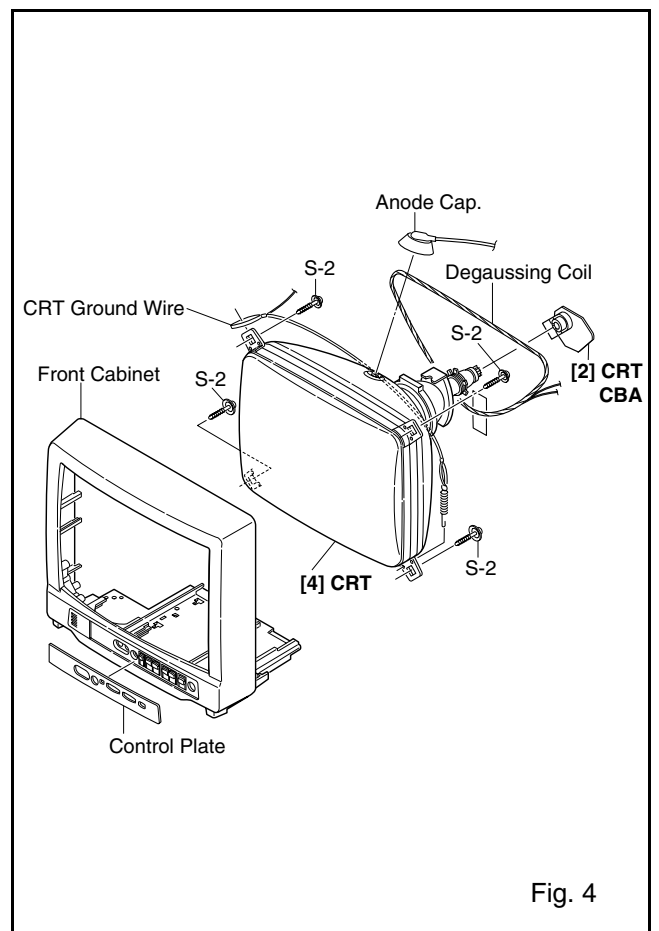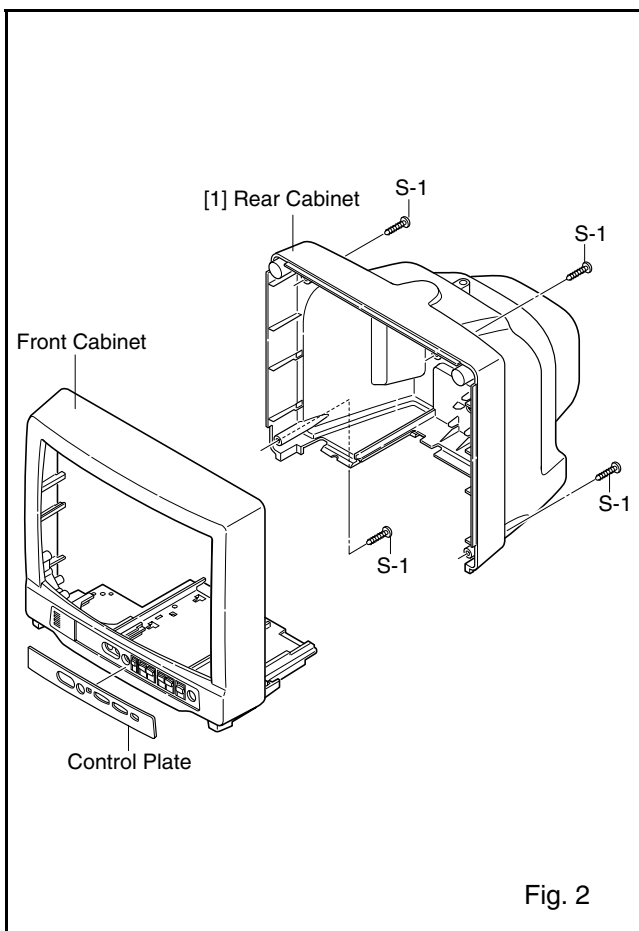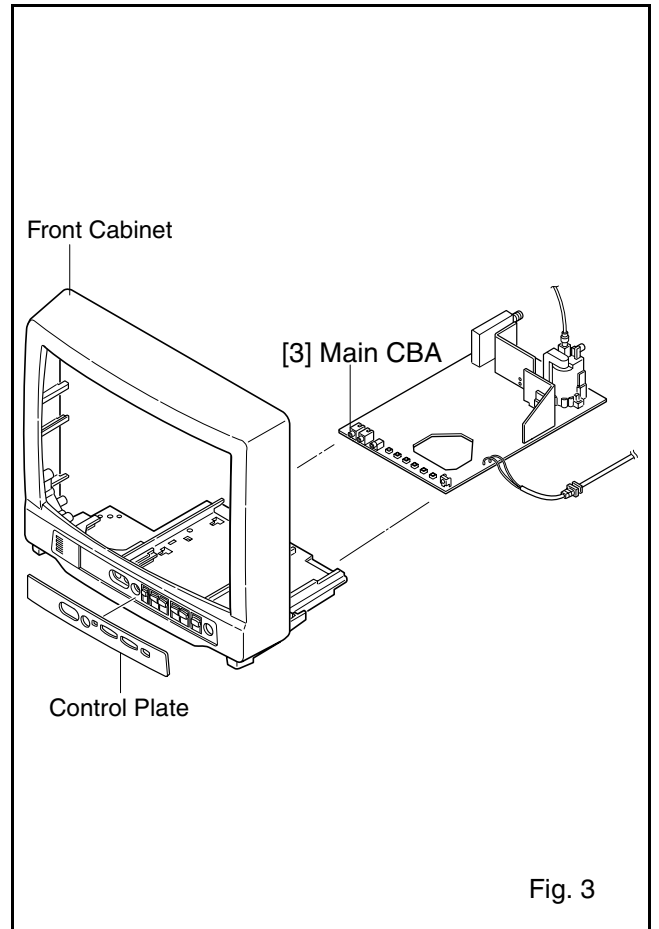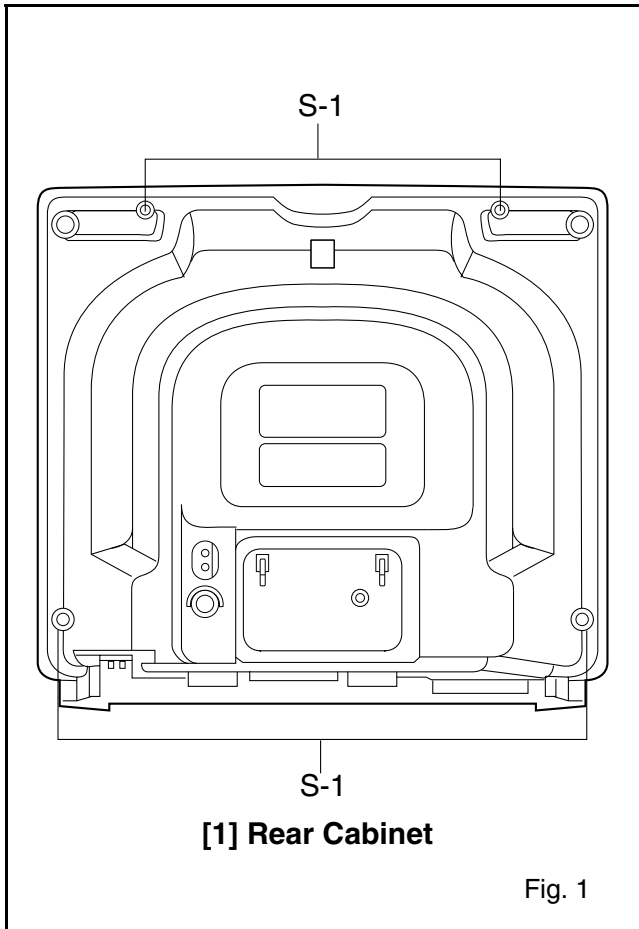

TV Cable Wiring Diagram

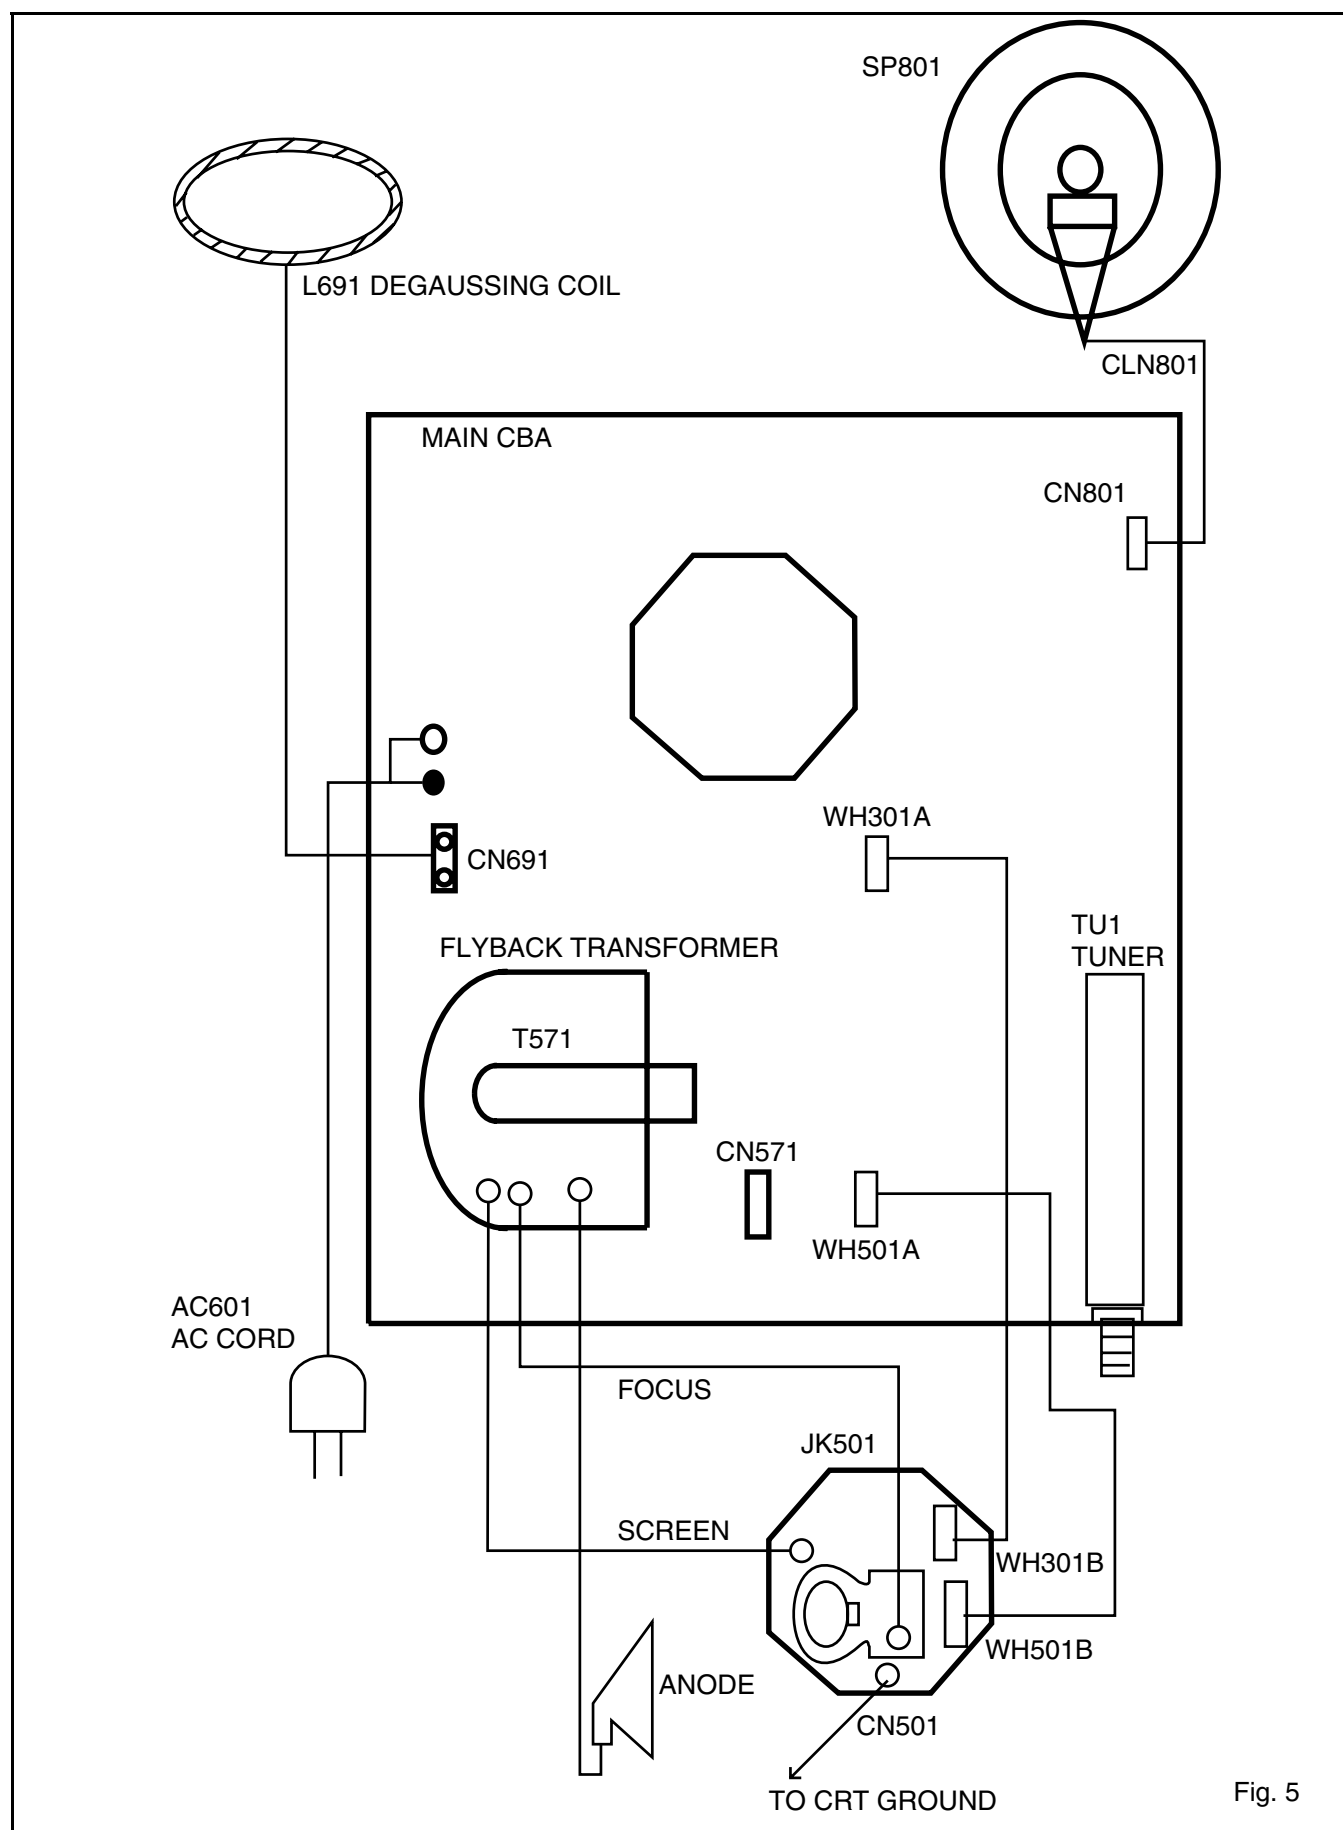


Fig. 5

ELECTRICAL ADJUSTMENT INSTRUCTIONS

General Note:

"CBA" is abbreviation for "Circuit Board Assembly".

NOTE:

Electrical adjustments are required after replacing circuit components and certain mechanical parts.

It is important to perform these adjustments only after all repairs and replacements have been completed.



Also, do not attempt these adjustments unless the proper equipment is available.

Test Equipment Required

1. NTSC Pattern Generator (Color Bar W/White Window, Red Color, Dot Pattern, Gray Scale, Monoscope, Multi-Burst)
2. DC Voltmeter
3. Oscilloscope: Dual-trace with 10:1 probe, V-Range: 0.001~50V/Div, F-Range: DC~AC-60MHz
4. Plastic Tip Driver
5. Remote control unit: Part No. N0121UD or N0134UD
6. DC power supply 13.2V/5A

How to make Service remote control unit:

1. Prepare normal remote control unit. (Part No. N0121UD or N0134UD) Remove 3 Screws from the back lid. (Fig. 1-1)
2. Added J1 (Jumper Wire) to the remote control CBA. (Fig. 1-2)

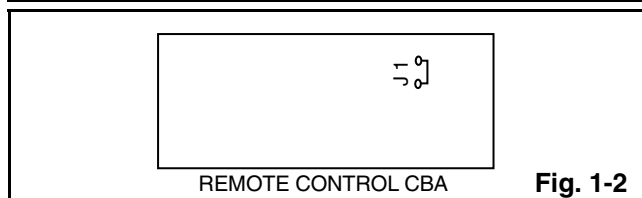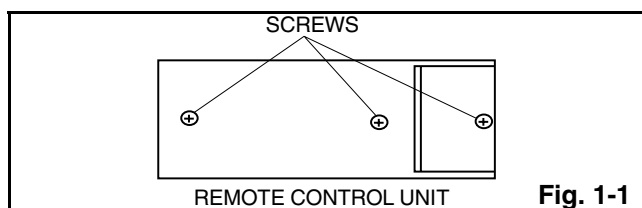

How to set up the service mode:

Service mode:

1. Use the service remote control unit.
2. Turn the power on. (Use main power on the TV unit.)
3. Press " SLEEP " button on the service remote control unit. Version of micro computer will display on the CRT. (Ex: 200-0.07 or 054-0.13)

4. When CPU version is 054-0.13: Check the display on the lower left is "00" and if it is not "00", set it at "00" according to "3-1 FRENCH, ACCESS CODE, VIDEO TONE".

When CPU version is 200-0.07: Confirm that the character of U (U.S.A. model) is indicated on the bottom left of the CRT. If the character of C (CAN-ADA model) is indicated, perform "3-1 Setting for FRENCH data Values".

1. DC 105V Adjustment

Purpose: To obtain correct operation.

Symptom of Misadjustment: The picture is dark and the unit does not operate correctly.

Test Point	Adj. Point	Mode	Input
TP601 TP300 (GND)	VR661	---	---
Tape	M. EQ.	Spec.	
---	DC Voltmeter	+105±0.5V DC.	

Note: TP601, TP300(GND), VR661 --- Main CBA

1. Connect DC Volt Meter to TP601 and TP300(GND).
2. Adjust VR661 so that the voltage of TP601 becomes +105±0.5V DC.

2. Black Stretch Control Adjustment

Purpose: To show the fine black color.

Symptom of Misadjustment: Black color will not appear correctly.

Note: Use Service remote control unit.

1. Enter the Service mode. (See page 5-1)
2. Press " 6 " button on the Service remote control unit. " B-S " is indicated.
3. Press " CH ▲ / ▼ " buttons on the Service remote control unit so that display will change " OFF ", " 0 ", " 1 ", " 2 " and " 3 ". Then choose " B-S OFF ".
4. Press " 6 " button on the Service remote control unit. " B-S*2 " is indicated.
5. Press " CH ▲ / ▼ " buttons on the Service remote control unit so that display will change " 0 ", " 1 ", " 2 " and " 3 ". Then choose " B-S*2 0 ".
6. Turn the power off and on again. (Main power button on the TV unit.)

3-1. Setting for 7F and FRENCH data Values

General

1. Enter the Service mode. (See page 5-1)
2. Press " VOL ▼ " button on the Service remote control unit. Display changes " C/D ", " VCO ", " 7F " and " FRENCH " cyclically when " VOL ▼ " button is pressed.

7F

1. Press " VOL ▼ " button on the Service remote control unit. Then select 7F display.
2. Press " CH ▲ / ▼ " buttons on the Service remote control unit. Then choose 7F=FF.

FRENCH

1. Press " VOL ▼ " button on the Service remote control unit. Then select FRENCH display.
2. Press " CH ▲ / ▼ " buttons on the Service remote control unit. Then choose FRENCH=OFF.

When CPU version is 054-0.13, perform the following settings:

ACCESS CODE ---- set to OFF

VIDEO TONE ---- set to OFF

Note: C/D and VCO data values are no need to adjust at this moment.

3-2. Setting for CONTRAST, COLOR, TINT, V-TINT and SHARP data Values

General

1. Enter the Service mode. (See page 5-1)
2. Press " MENU " button on the Service remote control unit. Display changes " BRIGHT ", " CONTRAST ", " COLOR ", " TINT ", " V-TINT " and " SHARP " cyclically when " MENU " button is pressed.

CONTRAST (CNT)

1. Press " MENU " button on the Service remote control unit. Then select " CONTRAST " (CNT) display.
2. Press " CH ▲ / ▼ " buttons on the Service remote control unit so that the value of " CONTRAST " (CNT) becomes 92.

COLOR (CLR)

1. Press " MENU " button on the Service remote control unit. Then select " COLOR " (CLR) display.
2. Press " CH ▲ / ▼ " buttons on the Service remote control unit so that the value of " COLOR " (CLR) becomes 56.

TINT (TNT)

1. Press " MENU " button on the Service remote control unit. Then select " TINT " (TNT) display.
2. Press " CH ▲ / ▼ " buttons on the Service remote control unit so that the value of " TINT " (TNT) becomes 60.

V-TINT (V-TNT)

1. Press " MENU " button on the Service remote control unit. Then select " V-TINT " (V-TNT) display.
2. Press " CH ▲ / ▼ " buttons on the Service remote control unit so that the value of " V-TINT " (V-TNT) becomes 60.

SHARP (SHARP)

1. Press " MENU " button on the Service remote control unit. Then select " SHARP " (SHARP) display.
2. Press " CH ▲ / ▼ " buttons on the Service remote control unit and select " SHARP OFF ".

Note: BRIGHT data value is no need to adjust at this moment.

4. H f₀ Adjustment

Purpose: To get correct horizontal frequency.

Symptom of Misadjustment: . If H f₀ adjustment is in correct, sqew distortion will appear on the screen.

Test Point	Adj. Point	Mode	Input
TP302	CH ▲ / ▼ button ["H-ADJ"] MODE		----
Tape	M. EQ.	Spec.	
----	Frequency Counter	15.734 kHz±300Hz	

Note: TP302 --- Main CBA

Use Service remote control unit.

1. Connect Frequency Counter to TP302 and ground.
2. Set the unit to the VIDEO mode which is located before CH2 and no input is necessary. Enter the Service mode. (See Page 5-1)
3. Operate the unit for at least 20 minutes.
4. Press " 2 " button on the Service remote control unit and select H-ADJ Mode. (By pressing " 2 " button the display will change from TV AGC to H-ADJ)
5. Press " CH ▲ / ▼ " button on the Service remote control unit so that the display will change " 0 " ~ " 7 ". At this moment, Choose display one of them from " 0 " ~ " 7 " when the Frequency Counter shows 15.734 kHz±300Hz or closer.
6. Turn the power off and on again. (Main Power button on the TV unit.)

5. VCO Adjustment

Purpose: To operate VCO correctly.

Symptom of Misadjustment: VCO does not work correctly and/or synchronization is faulty.

Test Point	Adj. Point	Mode	Input
---	---		No signal
Tape	M. EQ.	Spec.	
---	---	---	

Note: Use service remote control unit.

1. Disconnect the RF input and set the unit to Channel 4.
2. Enter the Service mode. (See Page 5-1)
3. Press " 3 " button on the Service remote control unit. The Auto VCO adjustment is started.
4. If the display color is changed from red to green, This adjustment is done.
5. Turn the Power off and on again. (Main power button on the TV unit.)

6. AGC Adjustment

Purpose: Set AGC (Auto Gain Control) Level.

Symptom of Misadjustment: AGC does not synchronize correctly when RF input level is too weak and picture distortion may occur if it is too strong.

Test Point	Adj. Point	Mode	Input
TP301	CH ▲ / ▼ buttons	RF	Color Bar 67.25MHz 60dB μ V
Tape	M. EQ.	Spec.	
---	Pattern Generator DC Volt Meter	+2.5 \pm 0.1VDC or +2.8 \pm 0.1VDC by Tuner Type.	

Notes: TP301 --- Main CBA

Use Service remote control unit.

1. Enter the Service mode. (See Page 5-1) Then press number " 2 " button on the Service remote control unit.
2. Receive the Color Bar signal for channel 4 (67.25MHz). (RF Input Level: 60dB μ V)
3. Press " CH ▲ / ▼ " buttons so that the voltage of TP301 becomes +2.5 \pm 0.1V DC. If the tuner is used TEDH9-300A. (Tuner type number)
4. Press " CH ▲ / ▼ " buttons so that the voltage of TP301 becomes +2.8 \pm 0.1V DC. If the tuner is used B8095AD. (Tuner type number)
5. Turn the Power off and on again. (Main power button on the TV unit.)

7. Black Level Adjustment

Purpose: Set Sub-bright Level

Symptom of Misadjustment: If Sub-brightness is incorrect, Proper brightness can not be obtained by adjusting the Brightness Control.

Note: TP502, TP501 (GND) --- CRT CBA

1. Enter the Service mode. (See page 5-1).
2. Press " MENU " button on the Service remote control unit and select " BRT "mode. (Display changes " BRT ", " CNT ", " CLR " and " TNT "cyclically when MENU button is pressed).
3. Press " CH ▲ / ▼ " buttons on the Service remote control unit so that the value of " BRT " becomes 128.
4. Turn the power off and on again. (Main power button on the TV unit.)

8. C-Trap Adjustment

Purpose: To get minimum leakage of the color signal carrier.

Symptom of Misadjustment: If C- Trap Adjustment is incorrect, stripes will appears on the screen.

Test Point	Adj. Point	Mode	Input
TP502 (Blue) TP501 (GND)	CH ▲ / ▼ buttons	RF	Color Bar
Tape	M. EQ.	Spec.	
----	Oscilloscope	----	

Note: TP502, TP501 --- CRT CBA

Use Service remote control unit.

1. Connect Oscilloscope to TP502 and TP501 (GND).
2. Enter the Service mode. (See Page 5-1) Receive color bar signal from RF Input.
3. Press " 0 " button on the Service remote control unit and select C-TRP Mode.
4. Press " CH ▲ / ▼ " buttons on the Service remote control unit so that the display will change " 0 ", " 1 ", " 2 " and " 3 ". Choose display " 0 ", " 1 ", " 2 " or " 3 " when B-Out (3.58MHz) value becomes minimum on the oscilloscope reading.
5. Turn the power off and on again. (Main power button on the TV unit.)

9. V. Size Adjustment

Purpose: To obtain correct vertical width of screen image.

Symptom of Misadjustment: If V. Size is incorrect, vertical size of image on the screen may not be properly displayed.

Test Point	Adj. Point	Mode	Input
---	Screen Control CH ▲ / ▼ buttons [V-S] Mode	RF	Monoscope
Tape	M. EQ.	Spec.	
---	Monoscope	90±5%	

Note: Use service remote control unit.

1. Operate the unit for at least 20 minutes.
2. Enter the Service mode. (See page 5-1)
3. Receive the Monoscope Pattern.
4. Press " 9 " button on the Service remote control unit and select " V-S " mode. (Display changes " V-S " and " V-P " cyclically when " 9 " button is pressed).
5. Press " CH ▲ / ▼ " buttons on the Service remote control unit so that the monoscope pattern will be 90±5% of display size and the circle is round.
6. Turn the power off and on again. (Main power button on the TV unit.)

10. V. Position Adjustment

Purpose: To obtain correct vertical width of screen image.

Symptom of misadjustment: If V. Position is incorrect, vertical height of image on the screen may not be properly displayed.

Test Point	Adj. Point	Mode	Input
---	Screen Control CH ▲ / ▼ buttons [V-P] Mode	RF	Monoscope
Tape	M. EQ.	Spec.	
---	Monoscope	90±5%	

Note: Use Service remote control unit

1. Operate the unit for at least 20 minutes.
2. Enter the Service Mode. (See page 5-1)
3. Receive the Monoscope Pattern.
4. Press " 9 " button on the Service remote control unit and select " V-P " mode. (Display change " V-S " and " V-P " cyclically when " 9 " button is pressed).
5. Press " CH ▲ / ▼ " buttons on the Service remote control unit so that the top and bottom of the monoscope pattern will be equal of each other.
6. Turn the Power off and on again. (Main power button on the TV unit.)

11. H. Position Adjustment

Purpose: To obtain correct horizontal position of screen image.

Symptom of Misadjustment: If H. Position is incorrect, horizontal position of image on the screen may not be properly displayed.

Test Point	Adj. Point	Mode	Input
---	Screen Control CH ▲ / ▼ buttons [H-P] Mode	RF	Monoscope
Tape	M. EQ.	Spec.	
---	Monoscope	90±5%	

Note: Use Service remote control unit

1. Operate the unit for at least 20 minutes.
2. Enter the Service mode. (See page 5-1)
3. Receive the Monoscope Pattern.
4. Press " 8 " button on the remote control unit and select " H-P " mode.
5. Press " CH ▲ / ▼ " buttons on the Service remote control unit so that the monoscope pattern will be 90±5% of display size and the circle is round.
6. Turn the Power off and on again. (Main power button on the TV unit.)

12. Cut-off Adjustment

Purpose: To adjust the beam current of R, G, B, and screen voltage.

Symptom of Misadjustment: White color may be red-dish, greenish or bluish.

Test Point	Adj. Point	Mode	Input
---	Screen-Control CH ▲ / ▼ buttons	RF	Black Raster
Tape	M. EQ.	Spec.	
---	Pattern Generator	See Reference Notes below.	

Figure

PATTERN GENERATOR




Fig. 2

Note: Screen Control FBT --- Main CBA

F.B.T= Fly Back Transformer

Use Service remote control unit

1. Degauss the CRT and allow CRT to operate for 20 minutes before starting the alignment.
2. Input the Black Raster Signal from RF Input.
3. Enter the Service mode. (See page 5-1)
4. Press " VOL ▼ " button on the Service remote control unit and select " C/D " mode. (Display changes " C/D ", "VCO ", " 7F " and " FRENCH " cyclically when " VOL ▼ " button is pressed.) then press " 1 ". The display will momentarily show " CUT OFF R " (R= Red). Now there should be a horizontal line across the center of the picture tube. If needed gradually turn the screen control on the flyback, clockwise until the horizontal line appears. Adjust the Red Cut off by pressing the " CH ▲ / ▼ " buttons. Proceed to Step 5 when the Red Cut off adjustment is done.
5. Press the " 2 " button. The display will momentarily show " CUT OFF G " (G=Green). Adjust the Green Cut off by pressing the " CH ▲ / ▼ " buttons. Proceed to step 6 when the Green Cut off adjustment is done.
6. Press the " 3 " button. The display will momentarily show " CUT OFF B " (B=Blue). Adjust the Blue cut off by pressing the " CH ▲ / ▼ " buttons. When done with steps 4, 5 and 6 the horizontal line should be pure white if not, then attempt the Cut off adjustment again.

13. White Balance Adjustment

Purpose: To mix red, green and blue beams correctly for pure white.

Symptom of Misadjustment: White becomes bluish or reddish.

Test Point	Adj. Point	Mode	Input
Screen	CH ▲ / ▼ buttons	RF	White Raster (APL 100%)
Tape	M. EQ.	Spec.	
	Pattern Generator, Color analyzer	See below	

Figure

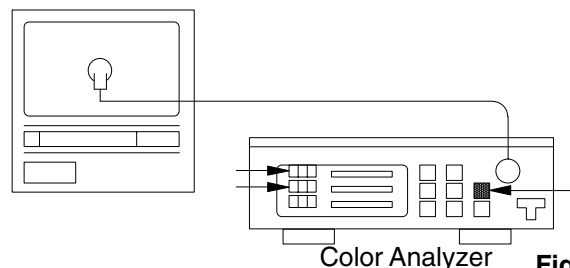


Fig. 3

Note: Use Service remote control unit

1. Operate the unit more than 20 minutes.
2. Face the unit to east. Degauss the CRT using De-gaussing Coil.
3. Input the White Raster (APL 100%).
4. Set the color analyzer to the CHROMA mode and after zero point calibration, bring the optical receptor to the center on the tube surface (CRT).
5. Enter the Service mode . Press " VOL ▼ " button on the Service remote control unit and select " C/D " mode. (Display changes " C/D ", "VCO ", " 7F " and " FRENCH " cyclically when " VOL ▼ " button is pressed.) then Press No. 8 button on the Service remote control Unit.
6. Press No. 4 button on the service remote control unit for Red adjustment. Press NO. 5 button on the Service remote control unit for Blue adjustment.
7. In each color mode, Press " CH ▲ / ▼ " button to adjust the values of color.
8. Adjusting Red and Blue color so that the tempreture becomes 9200K (x : 286 / y : 294) ±3%.
9. At this time, Re-check that Horizontal line is white. If not, Re-adjust Cut-off Adjustment until the Horizontal Line becomes pure white.
10. Turn off and on again to return to normal mode. Receive APL 100% white signal and Check Chroma temperatures become 9200K (x : 286 / y : 294) ±3%.

Note: Confirm that Cut Off Adj. is correct after this adjustment, and attempt Cut Off Adj. if needed.


14. Sub-Brightness Adjustment

Purpose: To get proper brightness.

Symptom of Misadjustment: If Sub-Brightness is incorrect, proper brightness cannot be obtained by adjusting the Brightness Control.

Test Point	Adj. Point	Mode	Input
---	CH ▲ / ▼ buttons	RF	IQW
Tape	M. EQ.	Spec.	
---	Pattern Generator	See below	

Figure

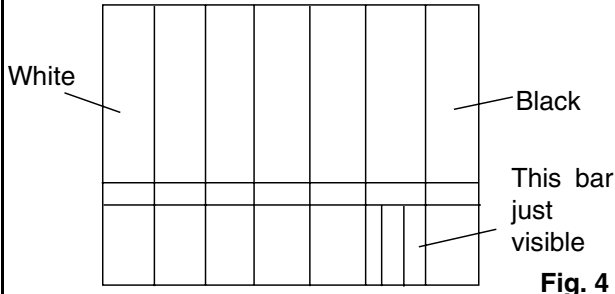

White

Black

This bar just visible

Fig. 4

Note: IQW Setup level --- 7.5 IRE
Use Service remote control unit

1. Enter the Service mode. (See page 5-1)
Then input IQW signal from RF Input.
2. Press "MENU" button on the Service remote control unit and Select "BRT" mode. (Display changes "BRT", "CNT", "CLR", and "TNT" cyclically when MENU button is pressed). Press "CH ▲ / ▼" buttons so that the bar is just visible (See above figure).
3. Turn the power off and on again. (Main power button on the TV unit.)

15. Focus Adjustment

Purpose: Set the optimum Focus.

Symptom of Misadjustment: If Focus Adjustment is incorrect, blurred images are shown on the display.

Test Point	Adj. Point	Mode	Input
---	Focus Control	---	Monoscope
Tape	M. EQ.	Spec.	
---	Pattern Generator	See below.	

Note: FocusVR(FBT)—MainCBA FBT=FlyBackTransformer

1. Operate the unit more than 30 minutes
2. Face the unit to the East and Degauss the CRT using Degaussing Coil.
3. Input the Monoscope Pattern.
4. Adjust the Focus Control on the FBT to obtain clear picture.

The following 2 adjustments normally are not attempted in the field. Only when replacing the CRT then adjust as a preparation.

16. Purity Adjustment

Purpose: To obtain pure color.

Symptom of Misadjustment: If Color Purity Adjustment is incorrect, large areas of color may not be properly displayed.

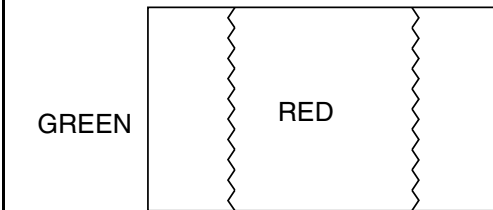
Test Point	Adj. Point	Mode	Input
---	Deflection Yoke Purity Magnet	---	Red Color
Tape	M. EQ.	Spec.	
---	Pattern Generator	See below.	
Figure			
			

Fig. 5

1. Set the unit facing east.
2. Operate the unit for over 30 minutes before adjusting.
3. Fully degauss the unit using an external degaussing coil.
4. Loosen the screw on the Deflection Yoke Clamper and pull the Deflection Yoke back away from the screen. (See Fig. 6)
5. Loosen the Ring Lock and adjust the Purity Magnets so that a red field is obtained at the center of the screen. Tighten Ring Lock. (See Fig. 5,6)
6. Slowly push the Deflection Yoke toward bell of CRT and set it where a uniform red field is obtained.
7. Tighten the clamp screw on the Deflection Yoke.

17. Convergence Adjustment

Purpose: To obtain proper convergence of red, green and blue beams.

Symptom of Misadjustment: If Convergence Adjustment is incorrect, the edge of white letters may have color edges.

Test Point	Adj. Point	Mode	Input
---	C.P. Magnet (RB), C.P. Magnet (RB-G), Deflection Yoke	---	Dot Pattern or Crosshatch
Tape	M. EQ.	Spec.	
---	Pattern Generator	See below.	

Figures

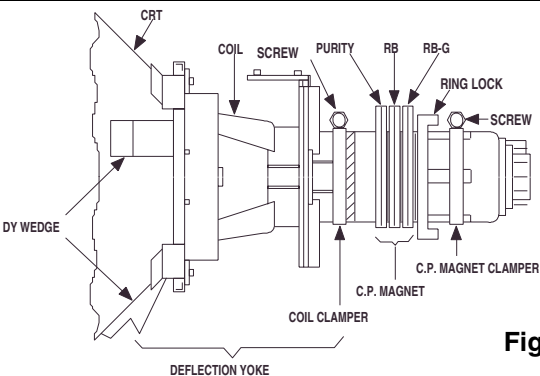


Fig. 6

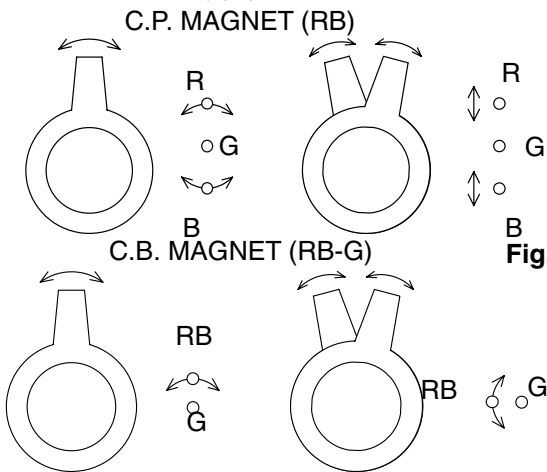



Fig. 7

Fig. 8


1. Loosen the Ring Lock and align red with blue dots or Crosshatch at the center of the screen by rotating (RB) C.P. Magnets. (See Fig. 7)
2. Align red / blue with green dots at the center of the screen by rotating (RB-G) C.P. Magnet. (See Fig. 8)
3. Fix the C.P. Magnets by tightening the Ring Lock.
4. Remove the DY Wedges and slightly tilt the Deflection Yoke horizontally and vertically to obtain the best overall convergence.
5. Fix the Deflection Yoke by carefully inserting the DY Wedges between CRT and Deflection Yoke.

BLOCK DIAGRAMS


IF/Video/System Control Block Diagram

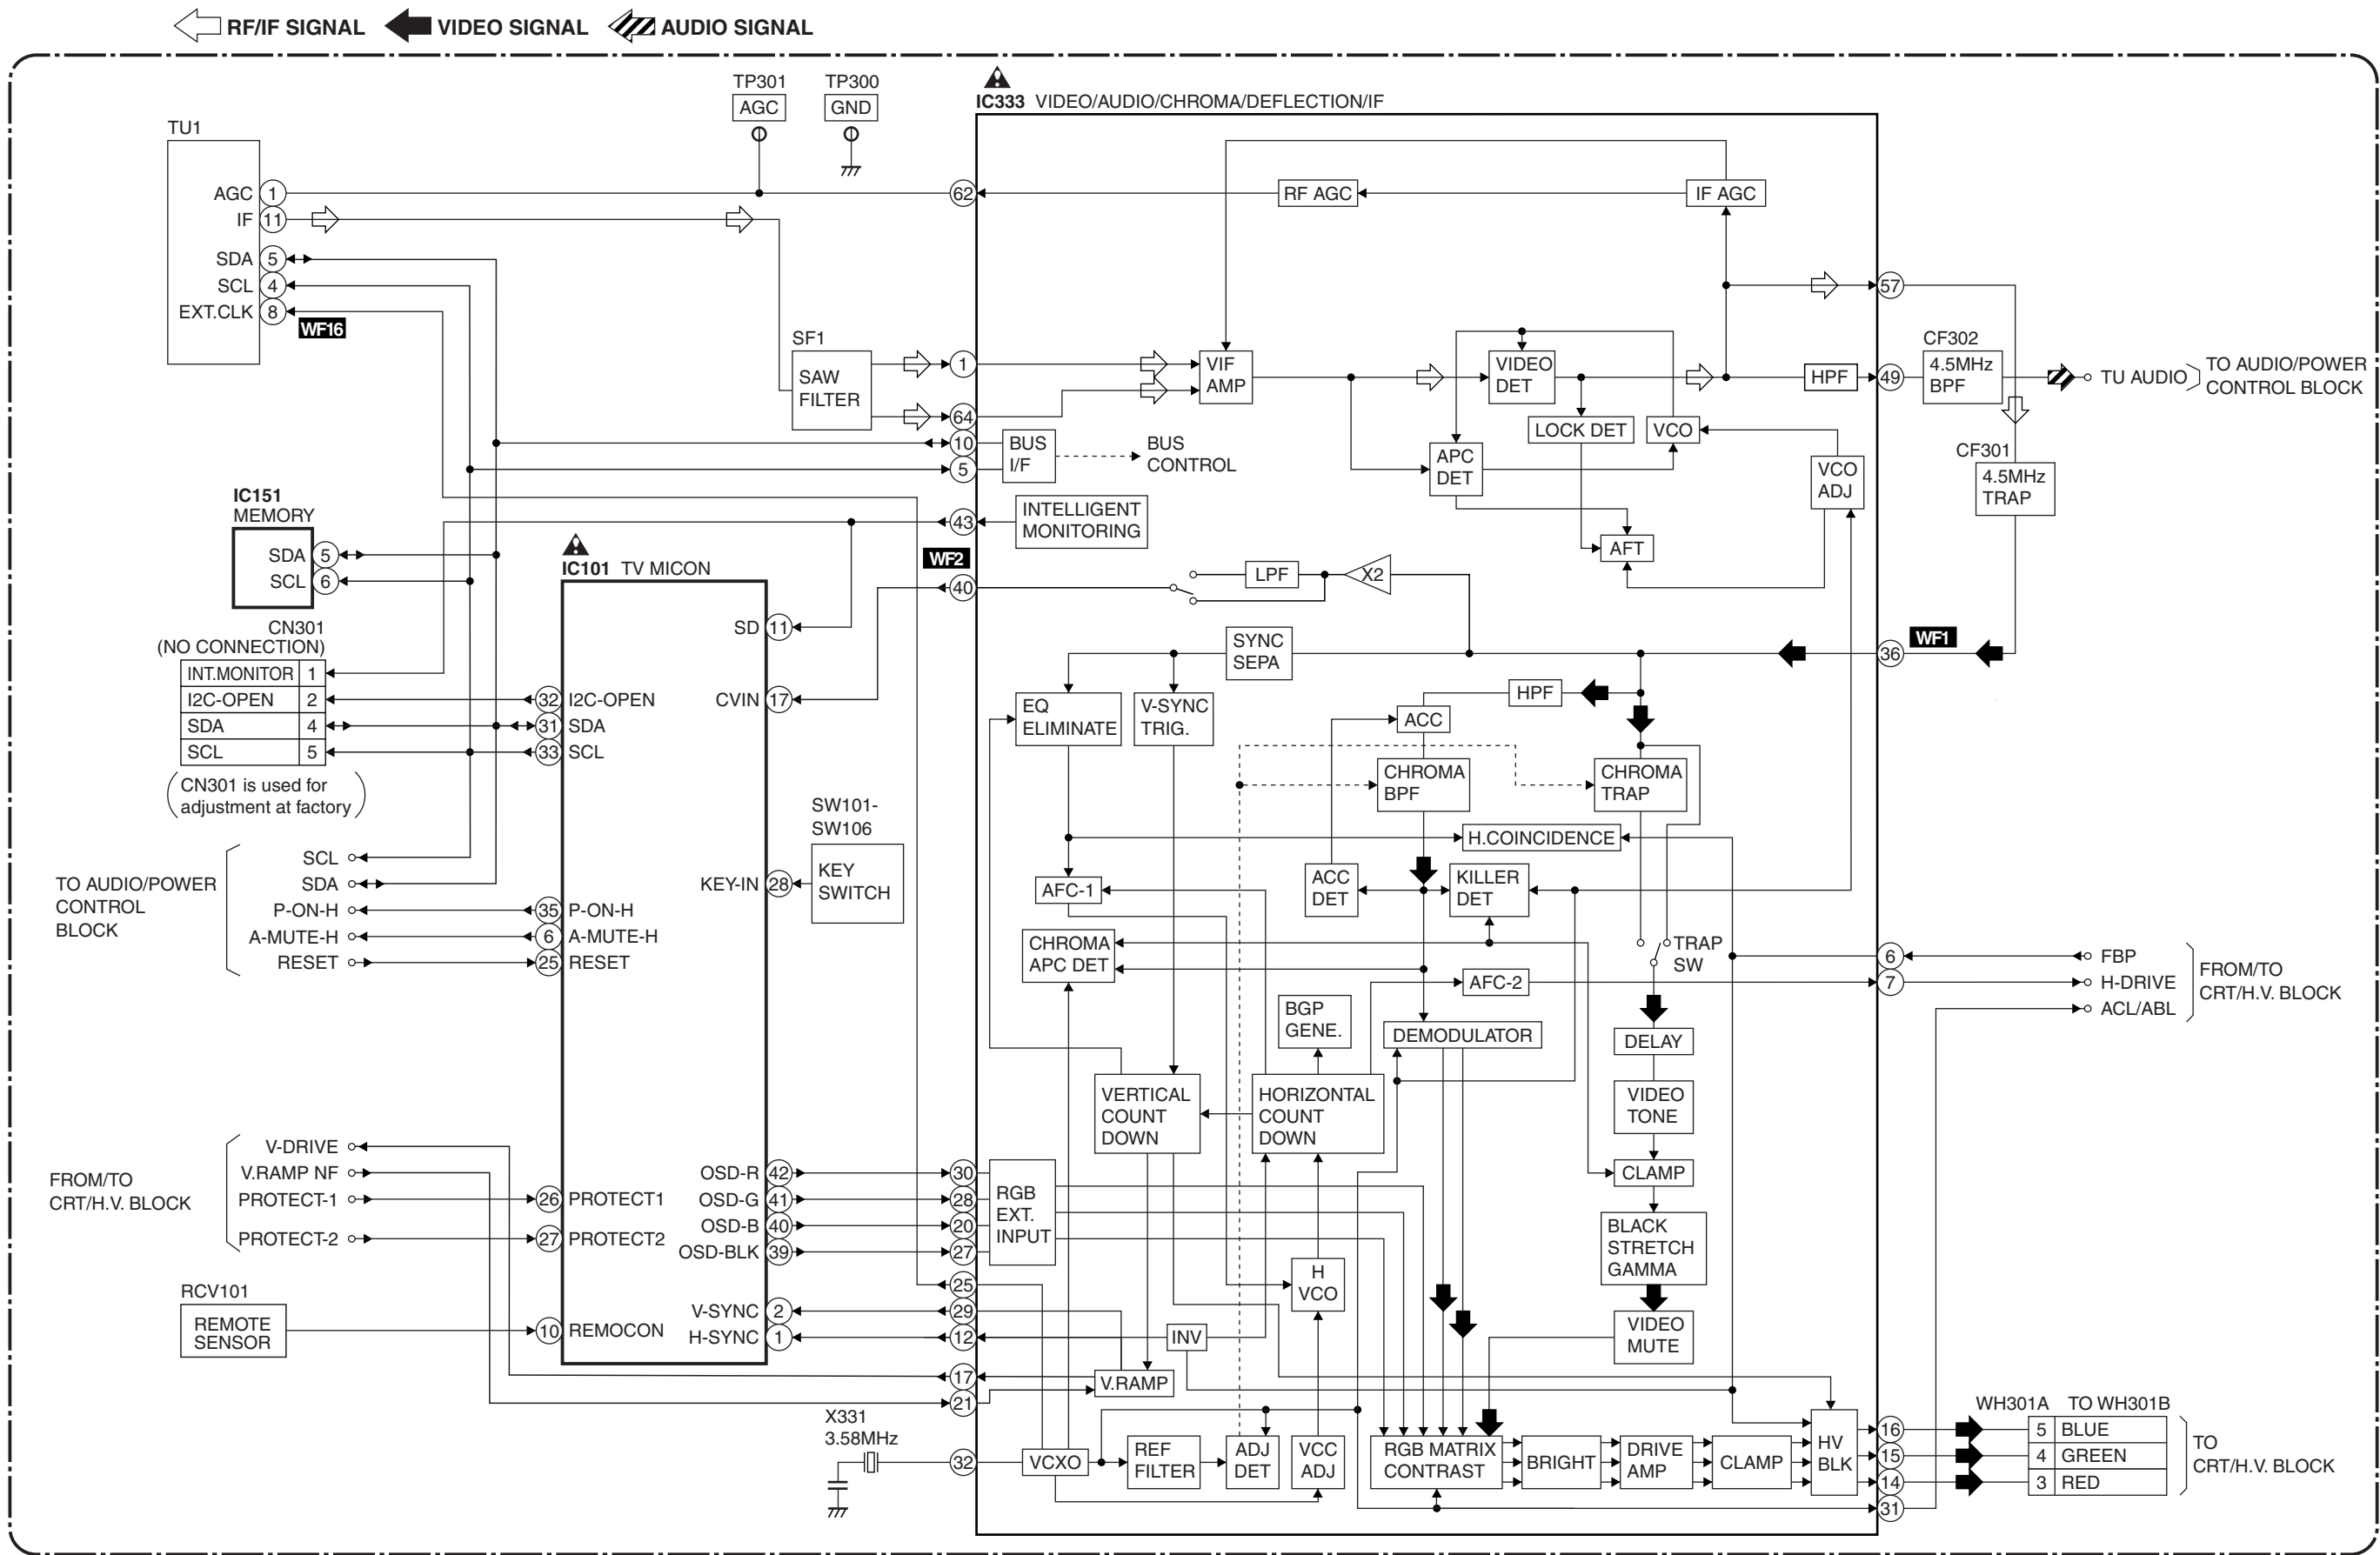

Audio/Power Control Block Diagram

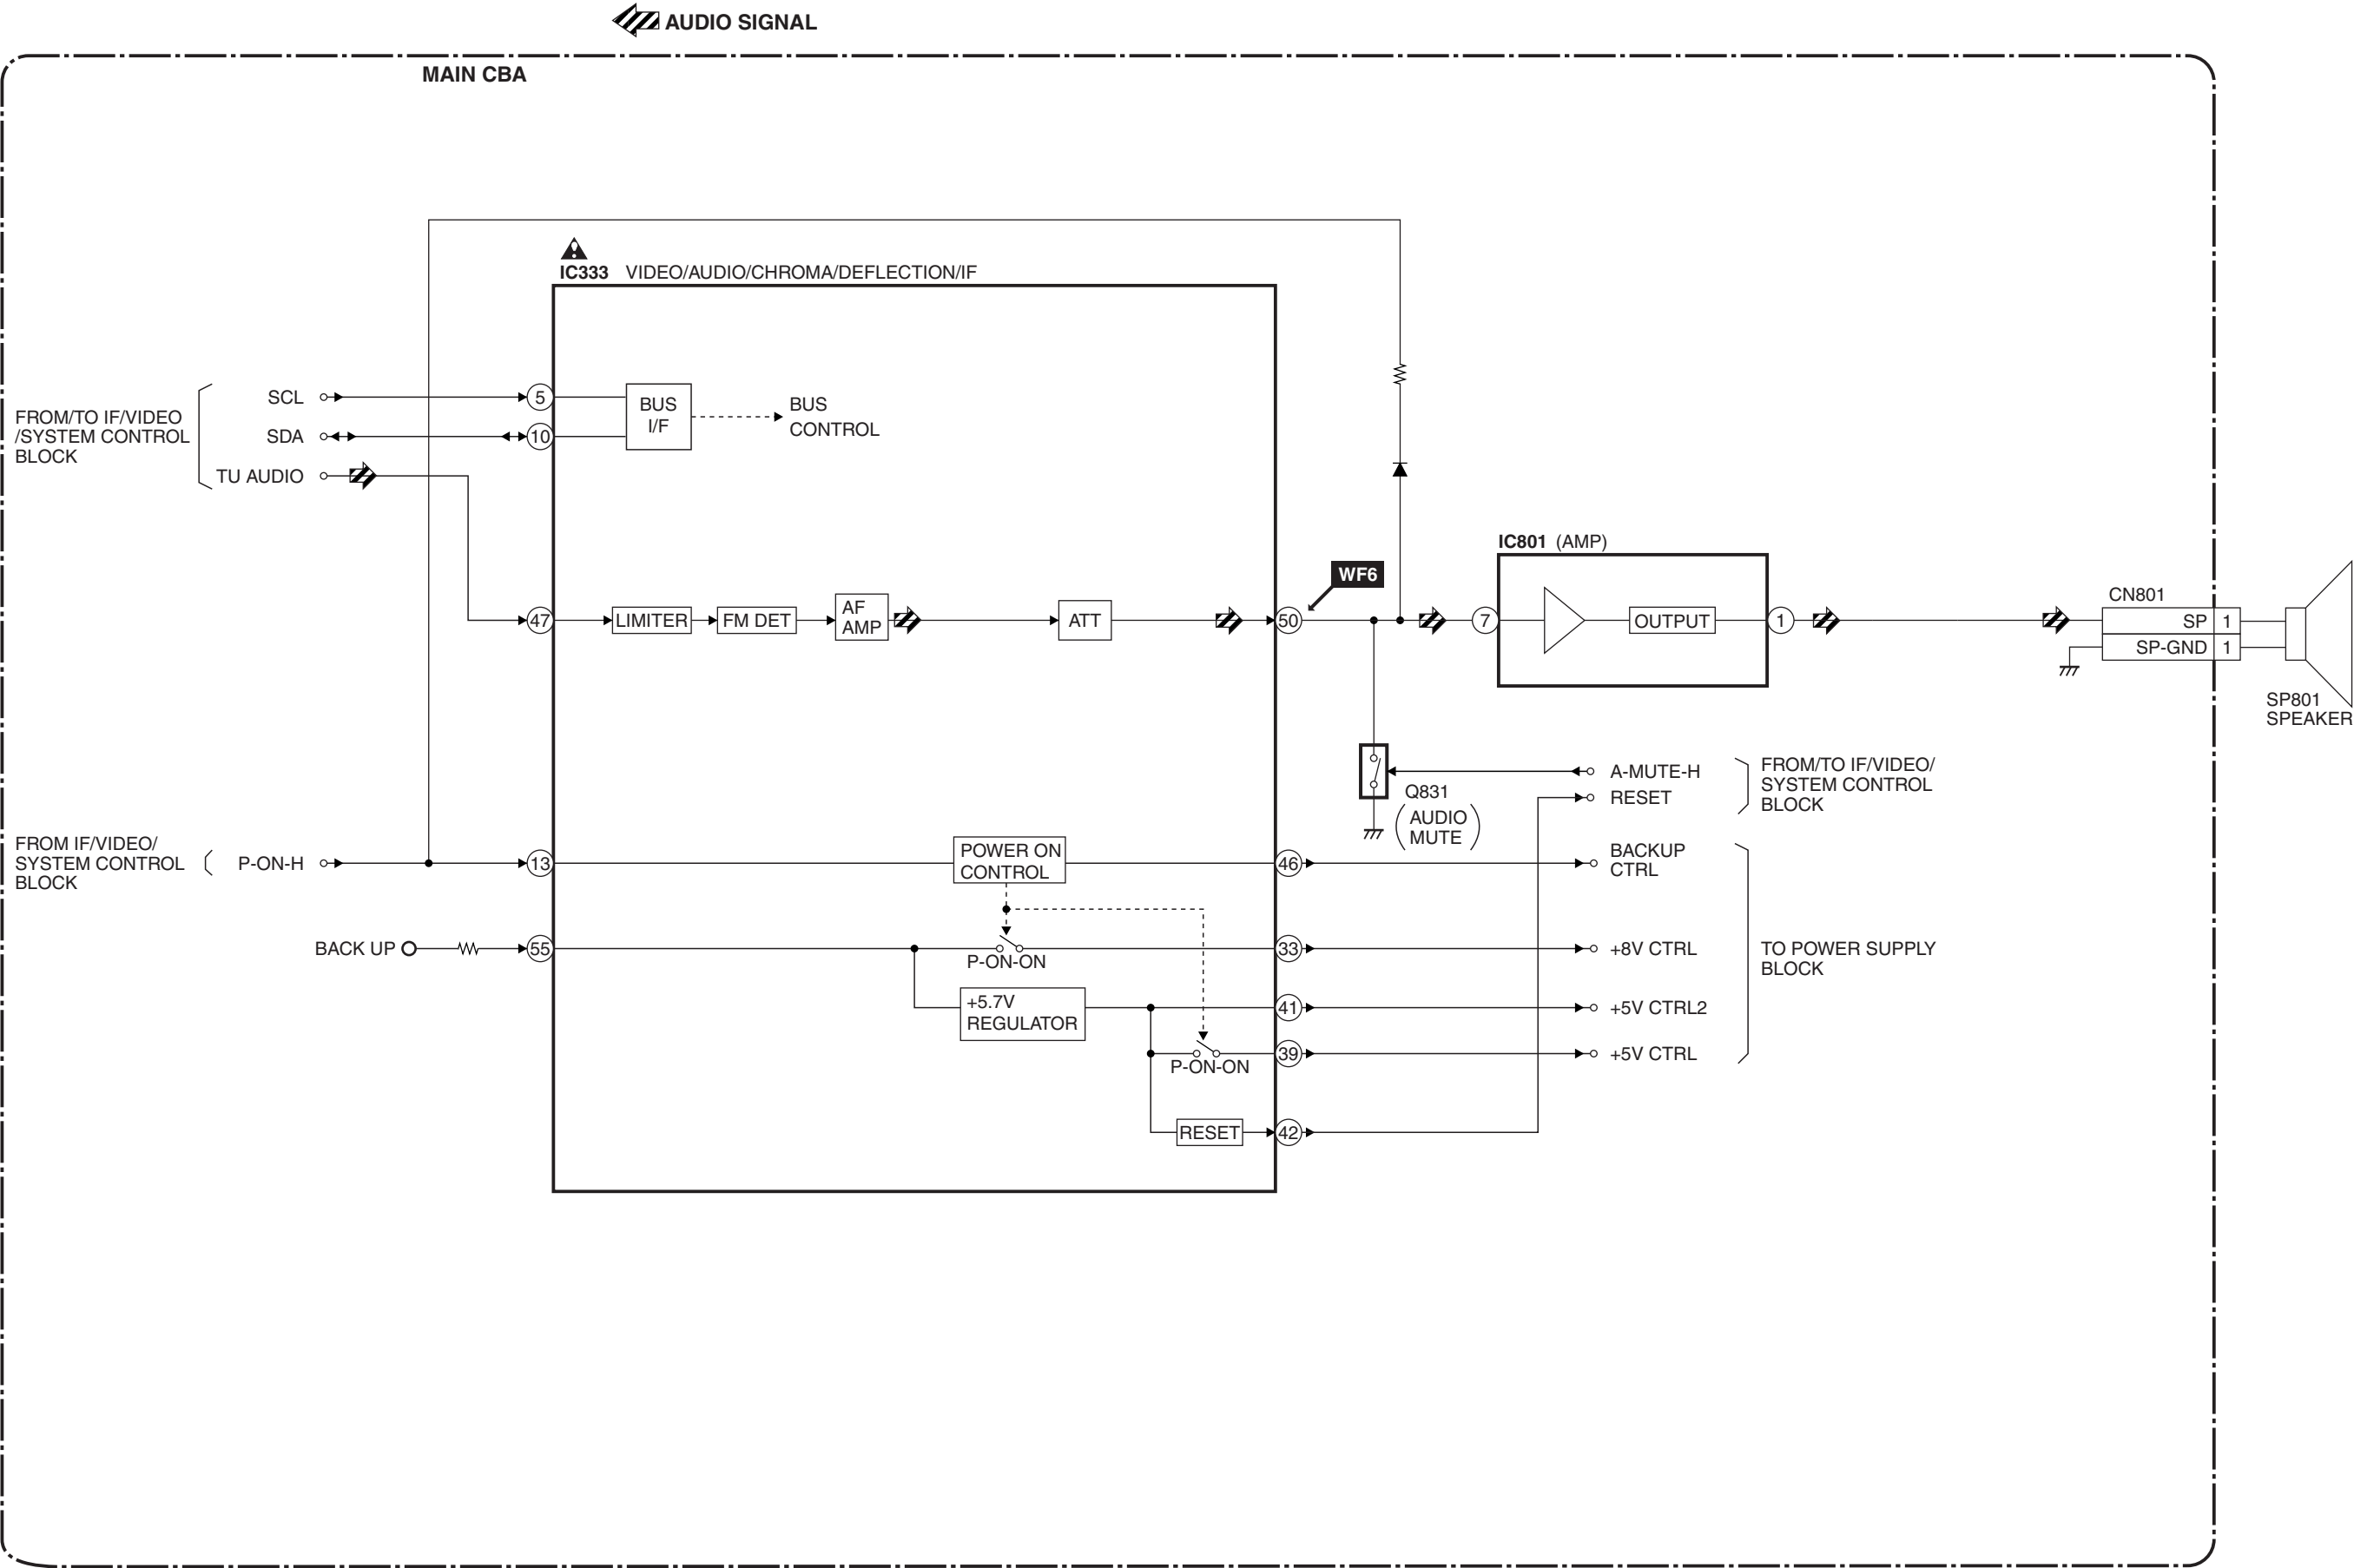


CRT/H.V. Block Diagram

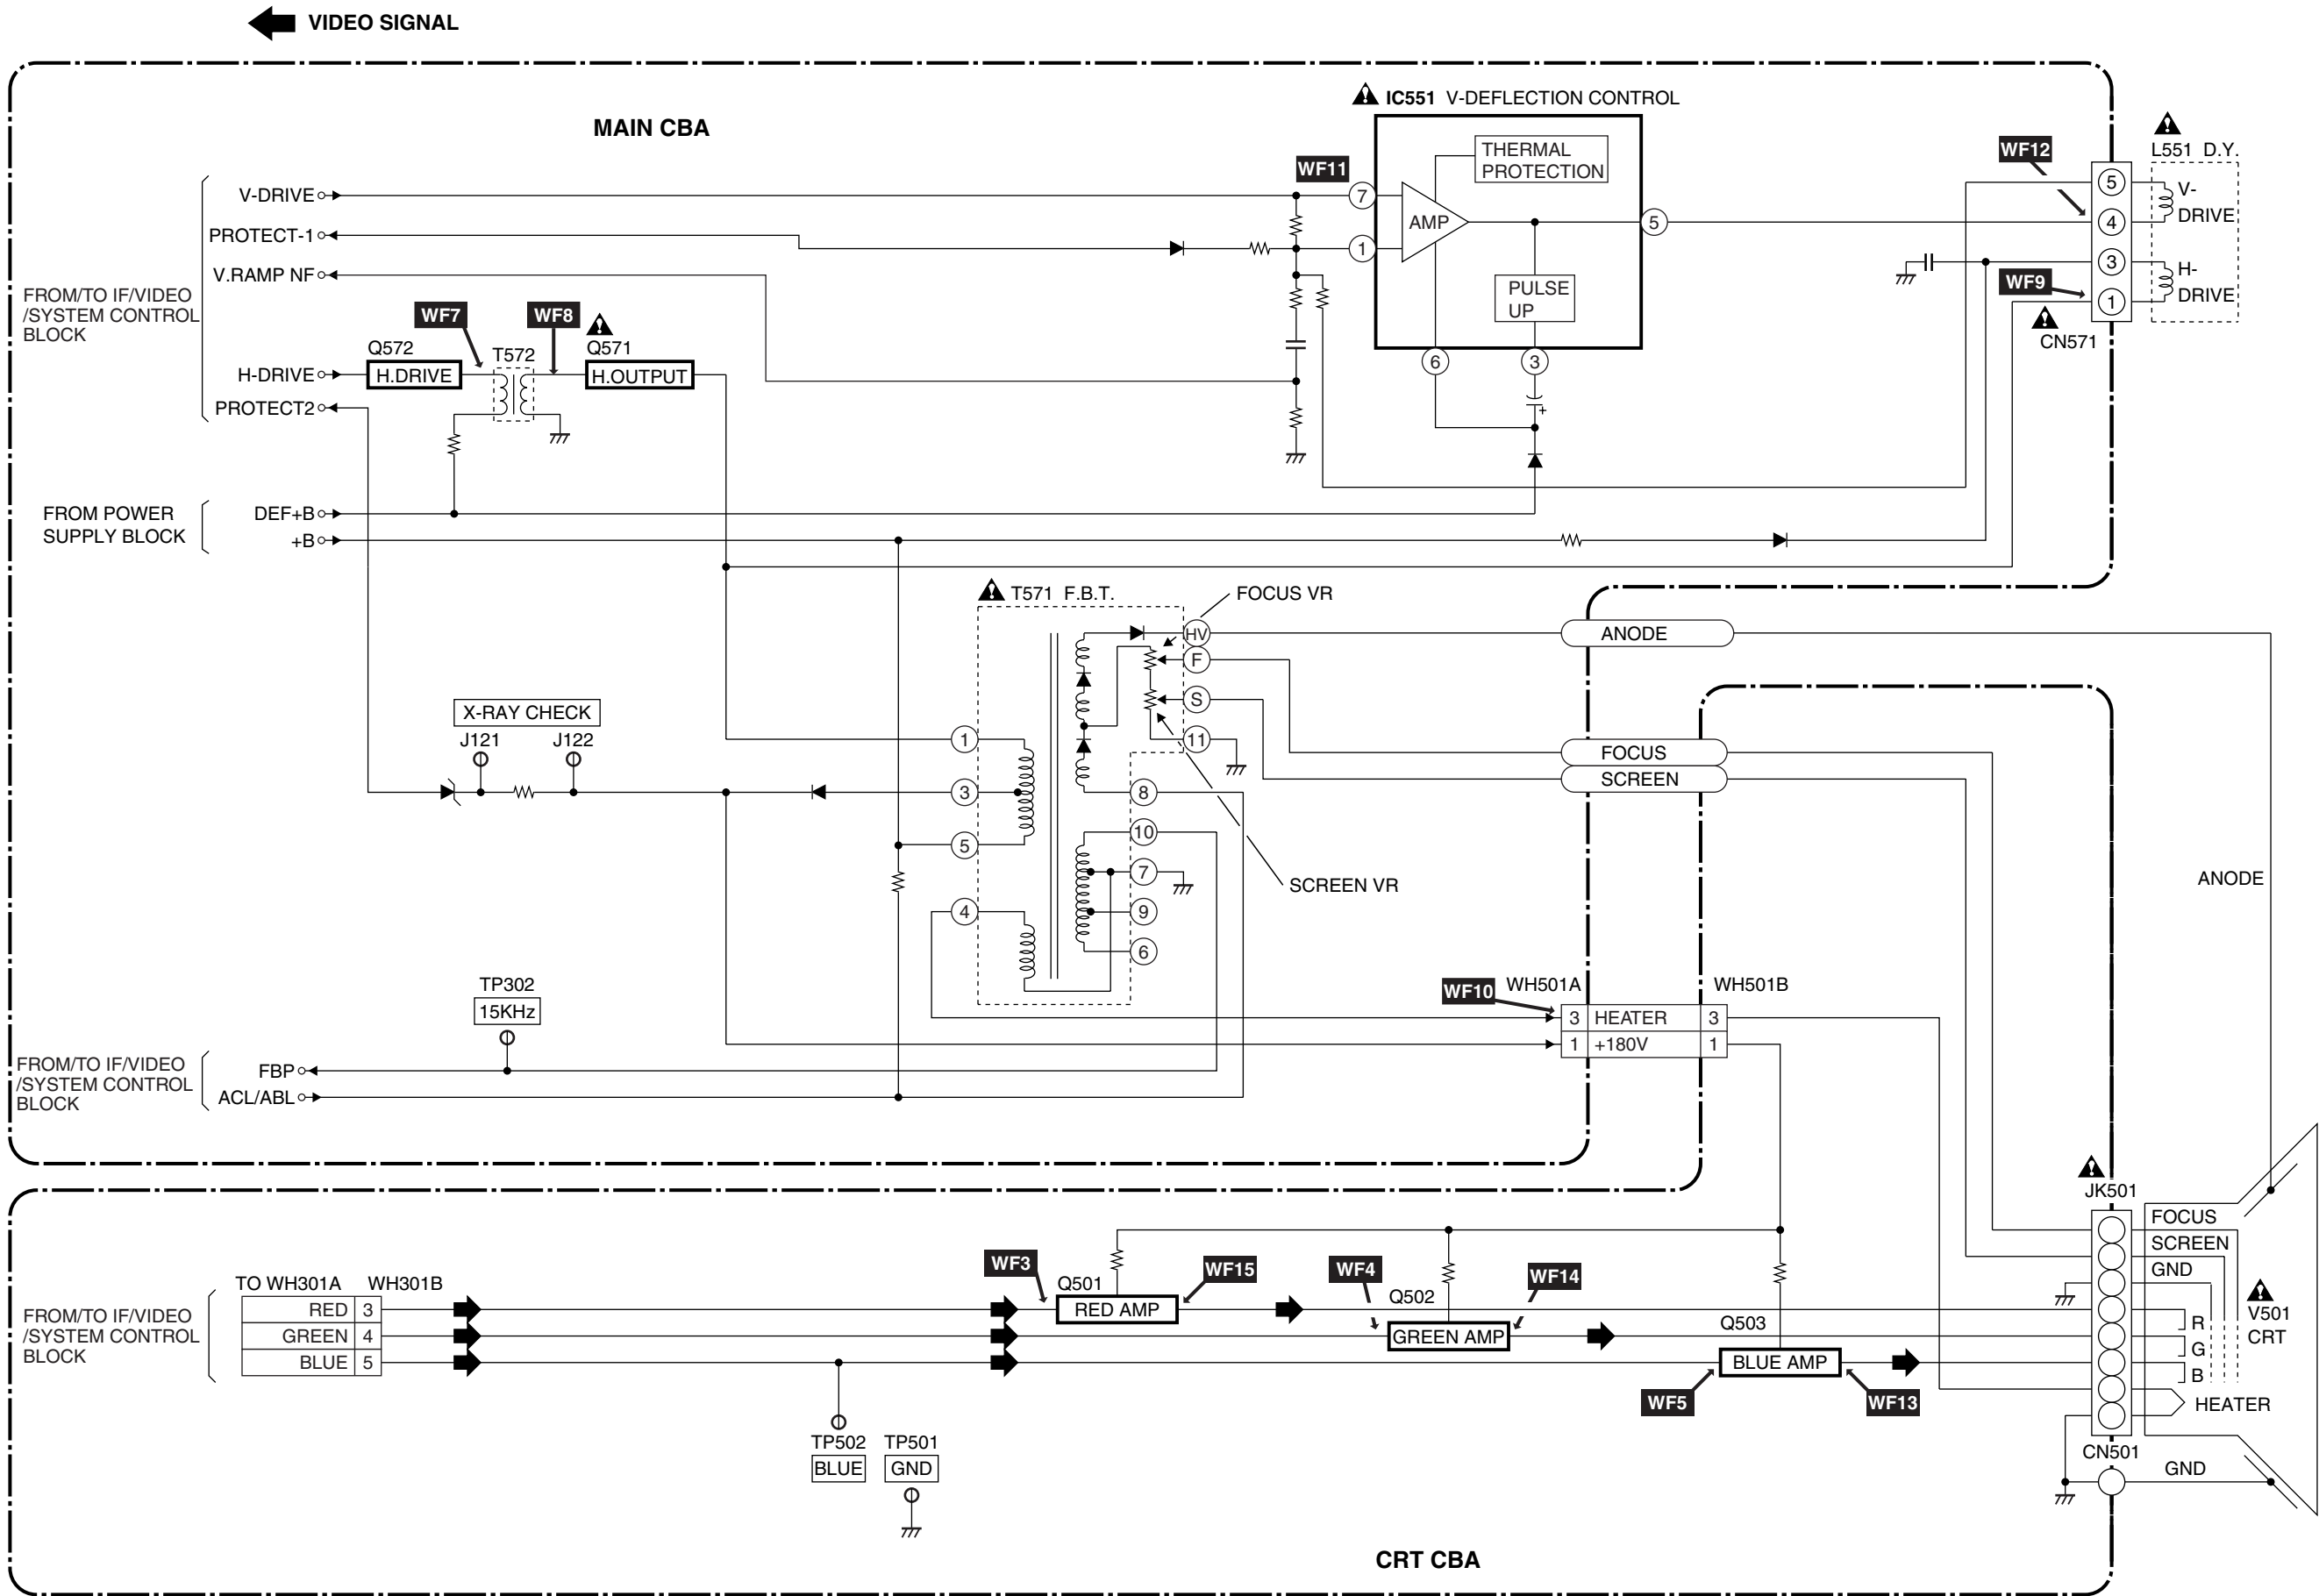


Power Supply Block Diagram

CAUTION !
Fixed voltage power supply circuit is used in this unit.
If Main Fuse (F601) is blown, check to see that all components in the power supply circuit are not defective before you connect the AC plug to the AC power supply.
Otherwise it may cause some components in the power supply circuit to fail.



CAUTION
FOR CONTINUED PROTECTION AGAINST FIRE HAZARD,
REPLACE ONLY WITH THE SAME TYPE FUSE.
ATTENTION : POUR UNE PROTECTION CONTINUE LES RISQUES
D'INCELE N'UTILISER QUE DES FUSIBLE DE MEMO TYPE.
RISK OF FIRE-REPLACE FUSE AS MARKED.
"This symbol means fast operating fuse."
"Ce symbole représente un fusible à fusion rapide."

NOTE :
The voltage for parts in hot circuit is measured using
hot GND as a common terminal.

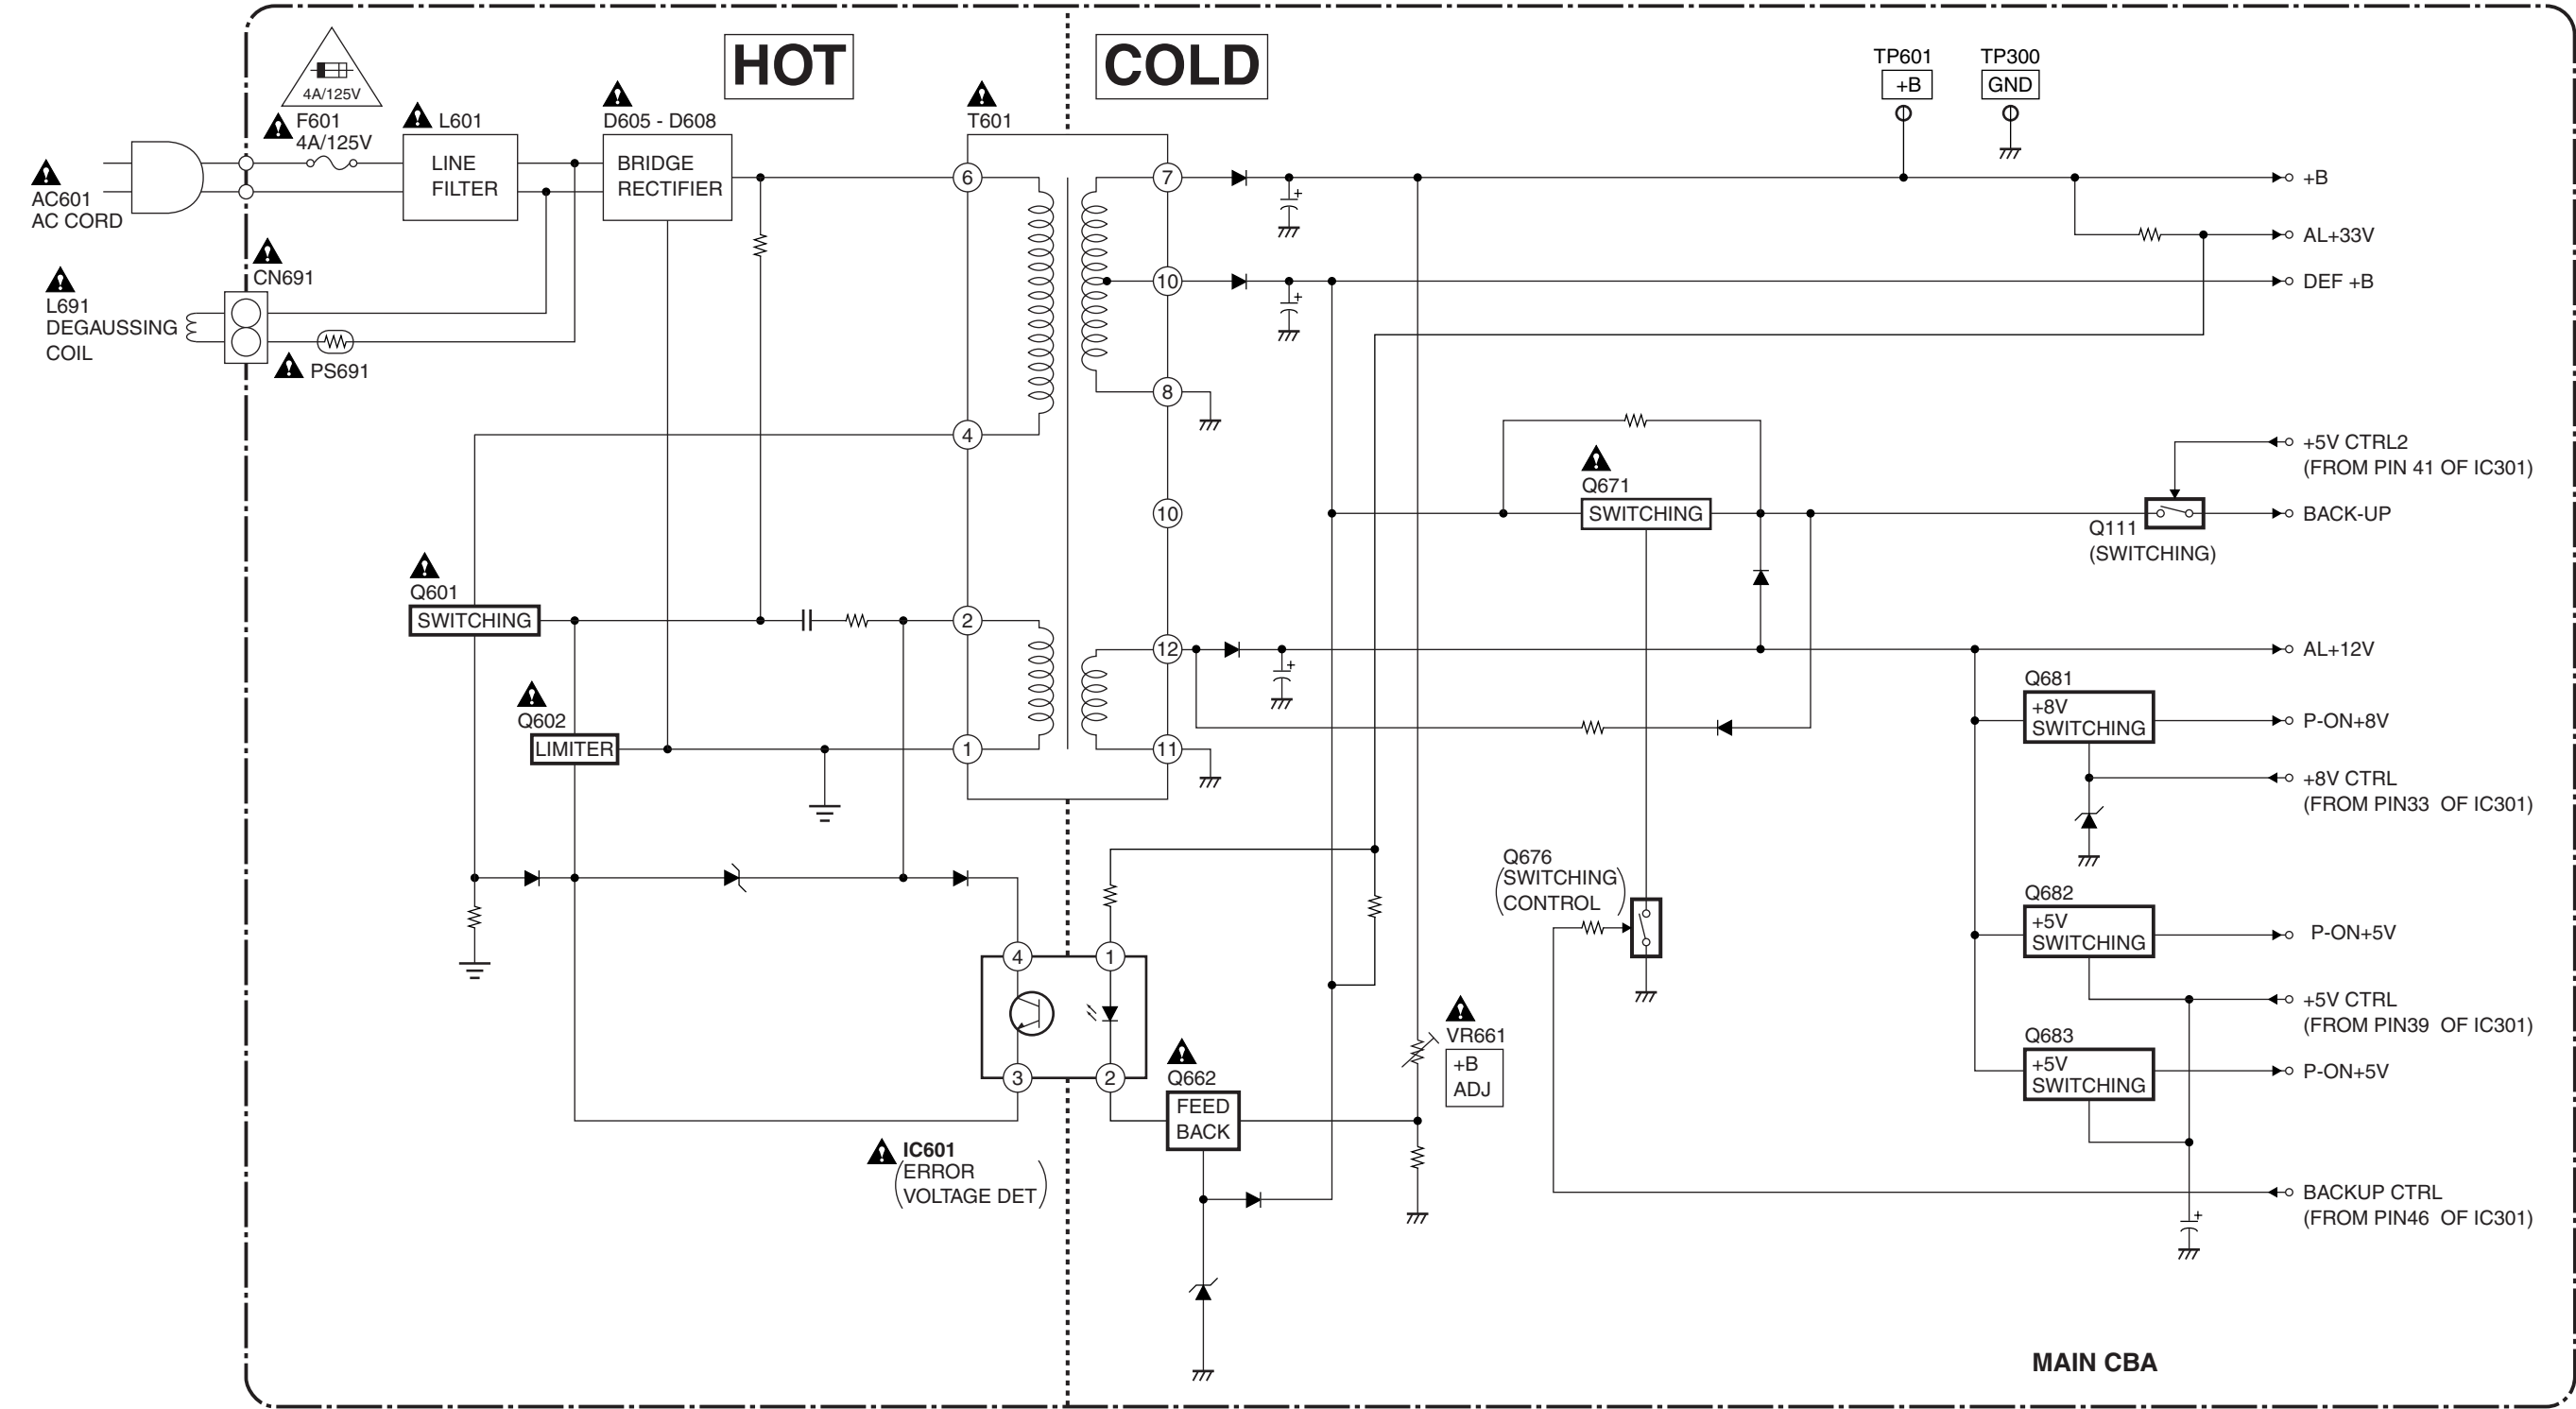

SCHEMATIC DIAGRAMS / CBA'S AND TEST POINTS

Standard Notes

Many electrical and mechanical parts in this chassis have special characteristics. These characteristics often pass unnoticed and the protection afforded by them cannot necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts that have these special safety characteristics are identified in this manual and its supplements; electrical components having such features are identified by the mark "▲" in the schematic diagram and the parts list. Before replacing any of these components, read the parts list in this manual carefully. The use of substitute replacement parts that do not have the same safety characteristics as specified in the parts list may create shock, fire, or other hazards.

Note:

1. Do not use the part number shown on these drawings for ordering. The correct part number is shown in the parts list, and may be slightly different or amended since these drawings were prepared.
2. All resistance values are indicated in ohms ($K=10^3$, $M=10^6$).
3. Resistor wattages are 1/4W or 1/6W unless otherwise specified.
4. All capacitance values are indicated in μF ($P=10^{-6}\mu F$).
5. All voltages are DC voltages unless otherwise specified

Note of Capacitors:

ML --- Mylar Cap. PP --- Metalized Film Cap. SC --- Semiconductor Cap. L --- Low Leakage type

Temperature Characteristics of Capacitors are noted with the following:

B --- $\pm 10\%$ CH --- $0 \pm 60 \text{ ppm}/^\circ\text{C}$ SL --- $+350 \sim 1000 \text{ ppm}/^\circ\text{C}$



Tolerance of Capacitors are noted with the following:

Z --- $+80 \sim -20\%$

Note of Resistors:


CEM --- Cement Res. MTL --- Metal Res. F --- Fuse Res.

Capacitors and transistors are represented by the following symbols.

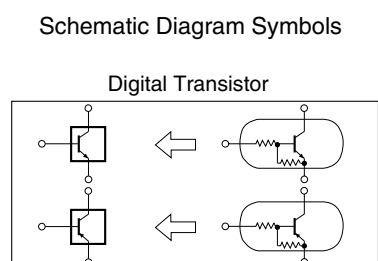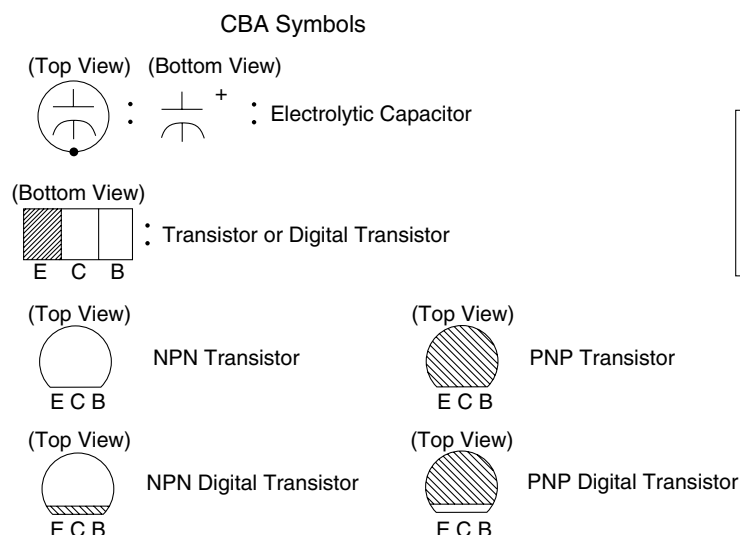

LILIST OF CAUTION, NOTES, AND SYMBOLS USED IN THE SCHEMATIC DIAGRAMS ON THE FOLLOWING PAGES:

- CAUTION:** FOR CONTINUED PROTECTION AGAINST FIRE HAZARD, REPLACE ONLY WITH THE SAME TYPE FUSE. ATTENTION: POUR UNE PROTECTION CONTINUE LES RISQUES D'INCELE N'UTILISER QUE DES FUSIBLE DE MEMO TYPE.



RISK OF FIRE-REPLACE FUSE AS MARKED.

2. CAUTION:

Fixed Voltage (or Auto voltage selectable) power supply circuit is used in this unit.

If Main Fuse (F001) is blown, first check to see that all components in the power supply circuit are not defective before you connect the AC plug to the AC power supply. Otherwise it may cause some components in the power supply circuit to fail.

3. Note:


- (1) Do not use the part number shown on the drawings for ordering. The correct part number is shown in the parts list, and may be slightly different or amended since the drawings were prepared.
- (2) To maintain original function and reliability of repaired units, use only original replacement parts which are listed with their part numbers in the parts list section of the service manual.

4. Wire Connectors


- (1) Prefix symbol "CN" means "connector" (can disconnect and reconnect).
- (2) Prefix symbol "CL" means "wire-solder holes of the PCB" (wire is soldered directly).

5. Note: Mark "•" is a leadless (chip) component.

6. Voltage indications on the schematics are as shown below:

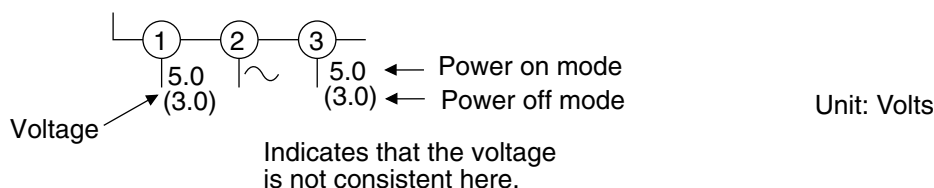


7. How to read converged lines



Examples:

1. "1-D3" means that line number "1" goes to area "D3".
2. "1-B1" means that line number "1" goes to area "B1".

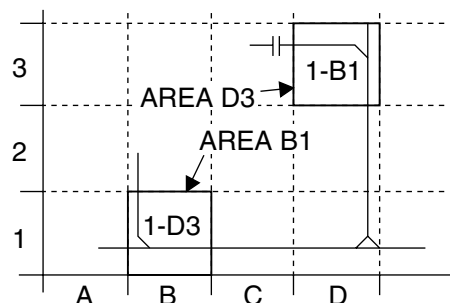


8. Test Point Information


- ⊙ : Indicates a test point with a jumper wire across a hole in the PCB.
- : Used to indicate a test point with a component lead on foil side.
- ⊗ : Used to indicate a test point with no test pin.
- : Used to indicate a test point with a test pin.

A5	B5	C5	D5	E5	F5	G5
A4	B4	C4	D4	E4	F4	G4
A3	B3	C3	D3	E3	F3	G3
A2	B2	C2	D2	E2	F2	G2
A1	B1	C1	D1	E1	F1	G1


--- IF SIGNAL
— VIDEO SIGNAL
◀ AUDIO SIGNAL

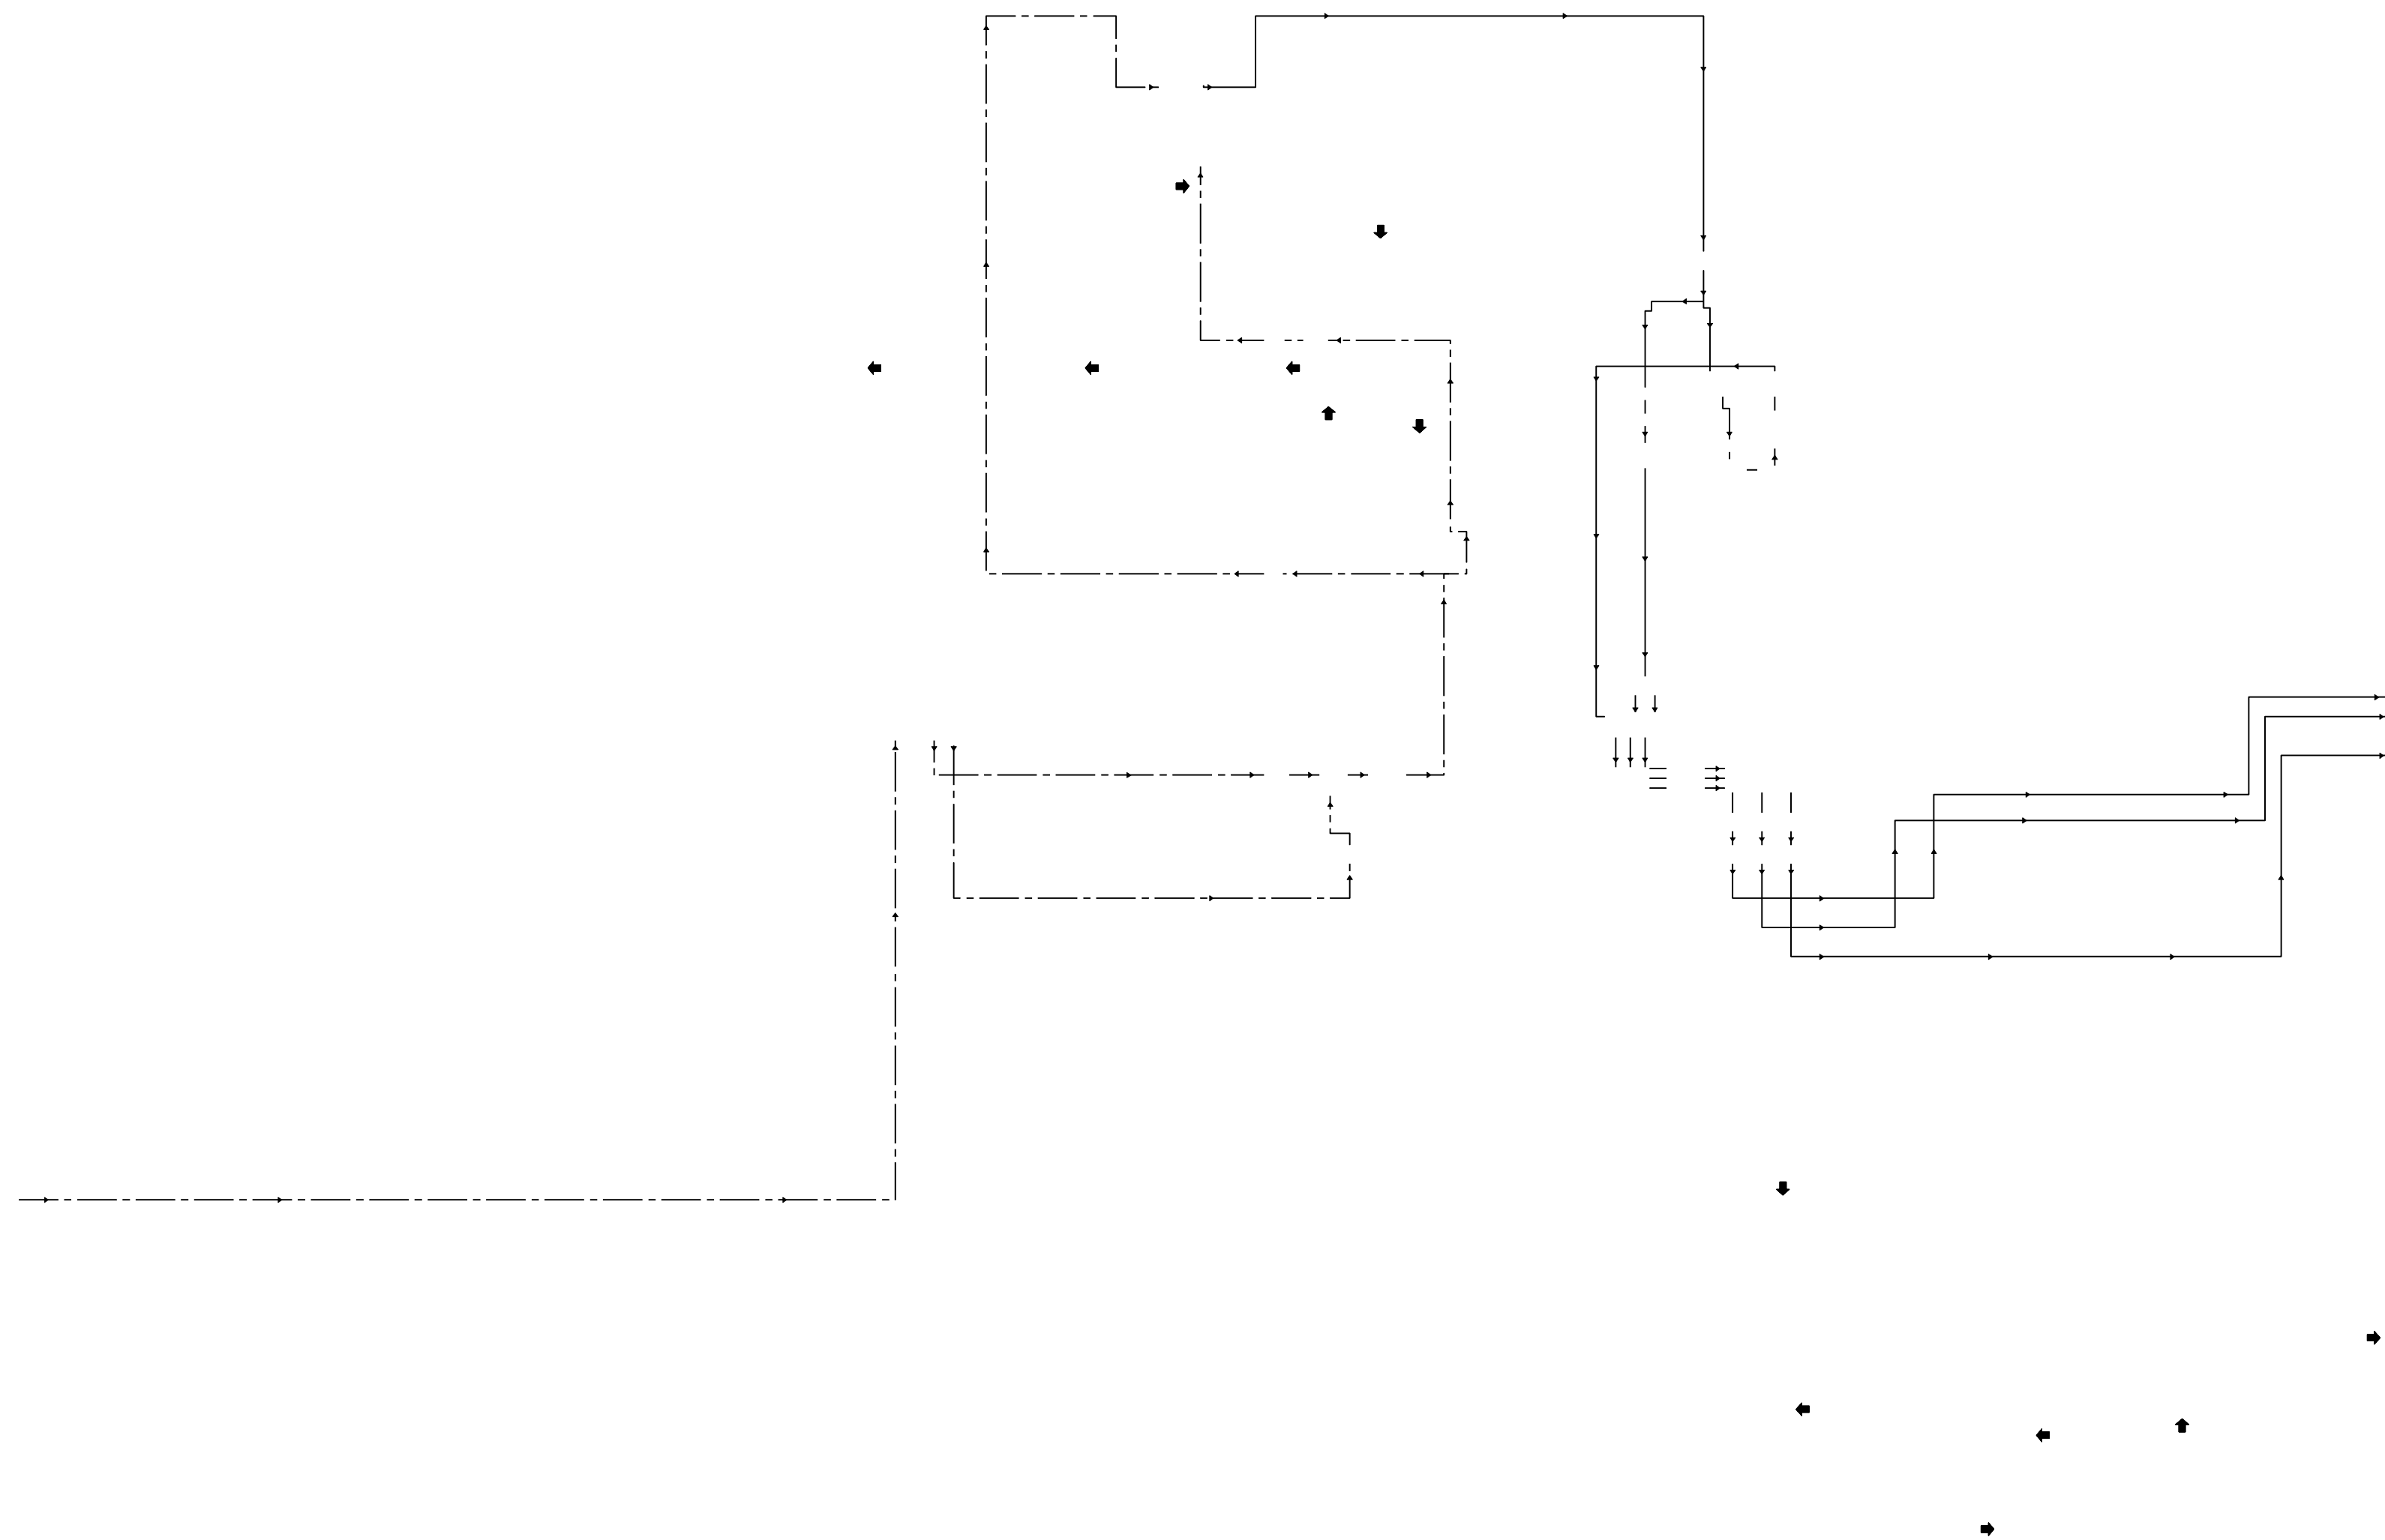

Main 1/2 Schematic Diagram

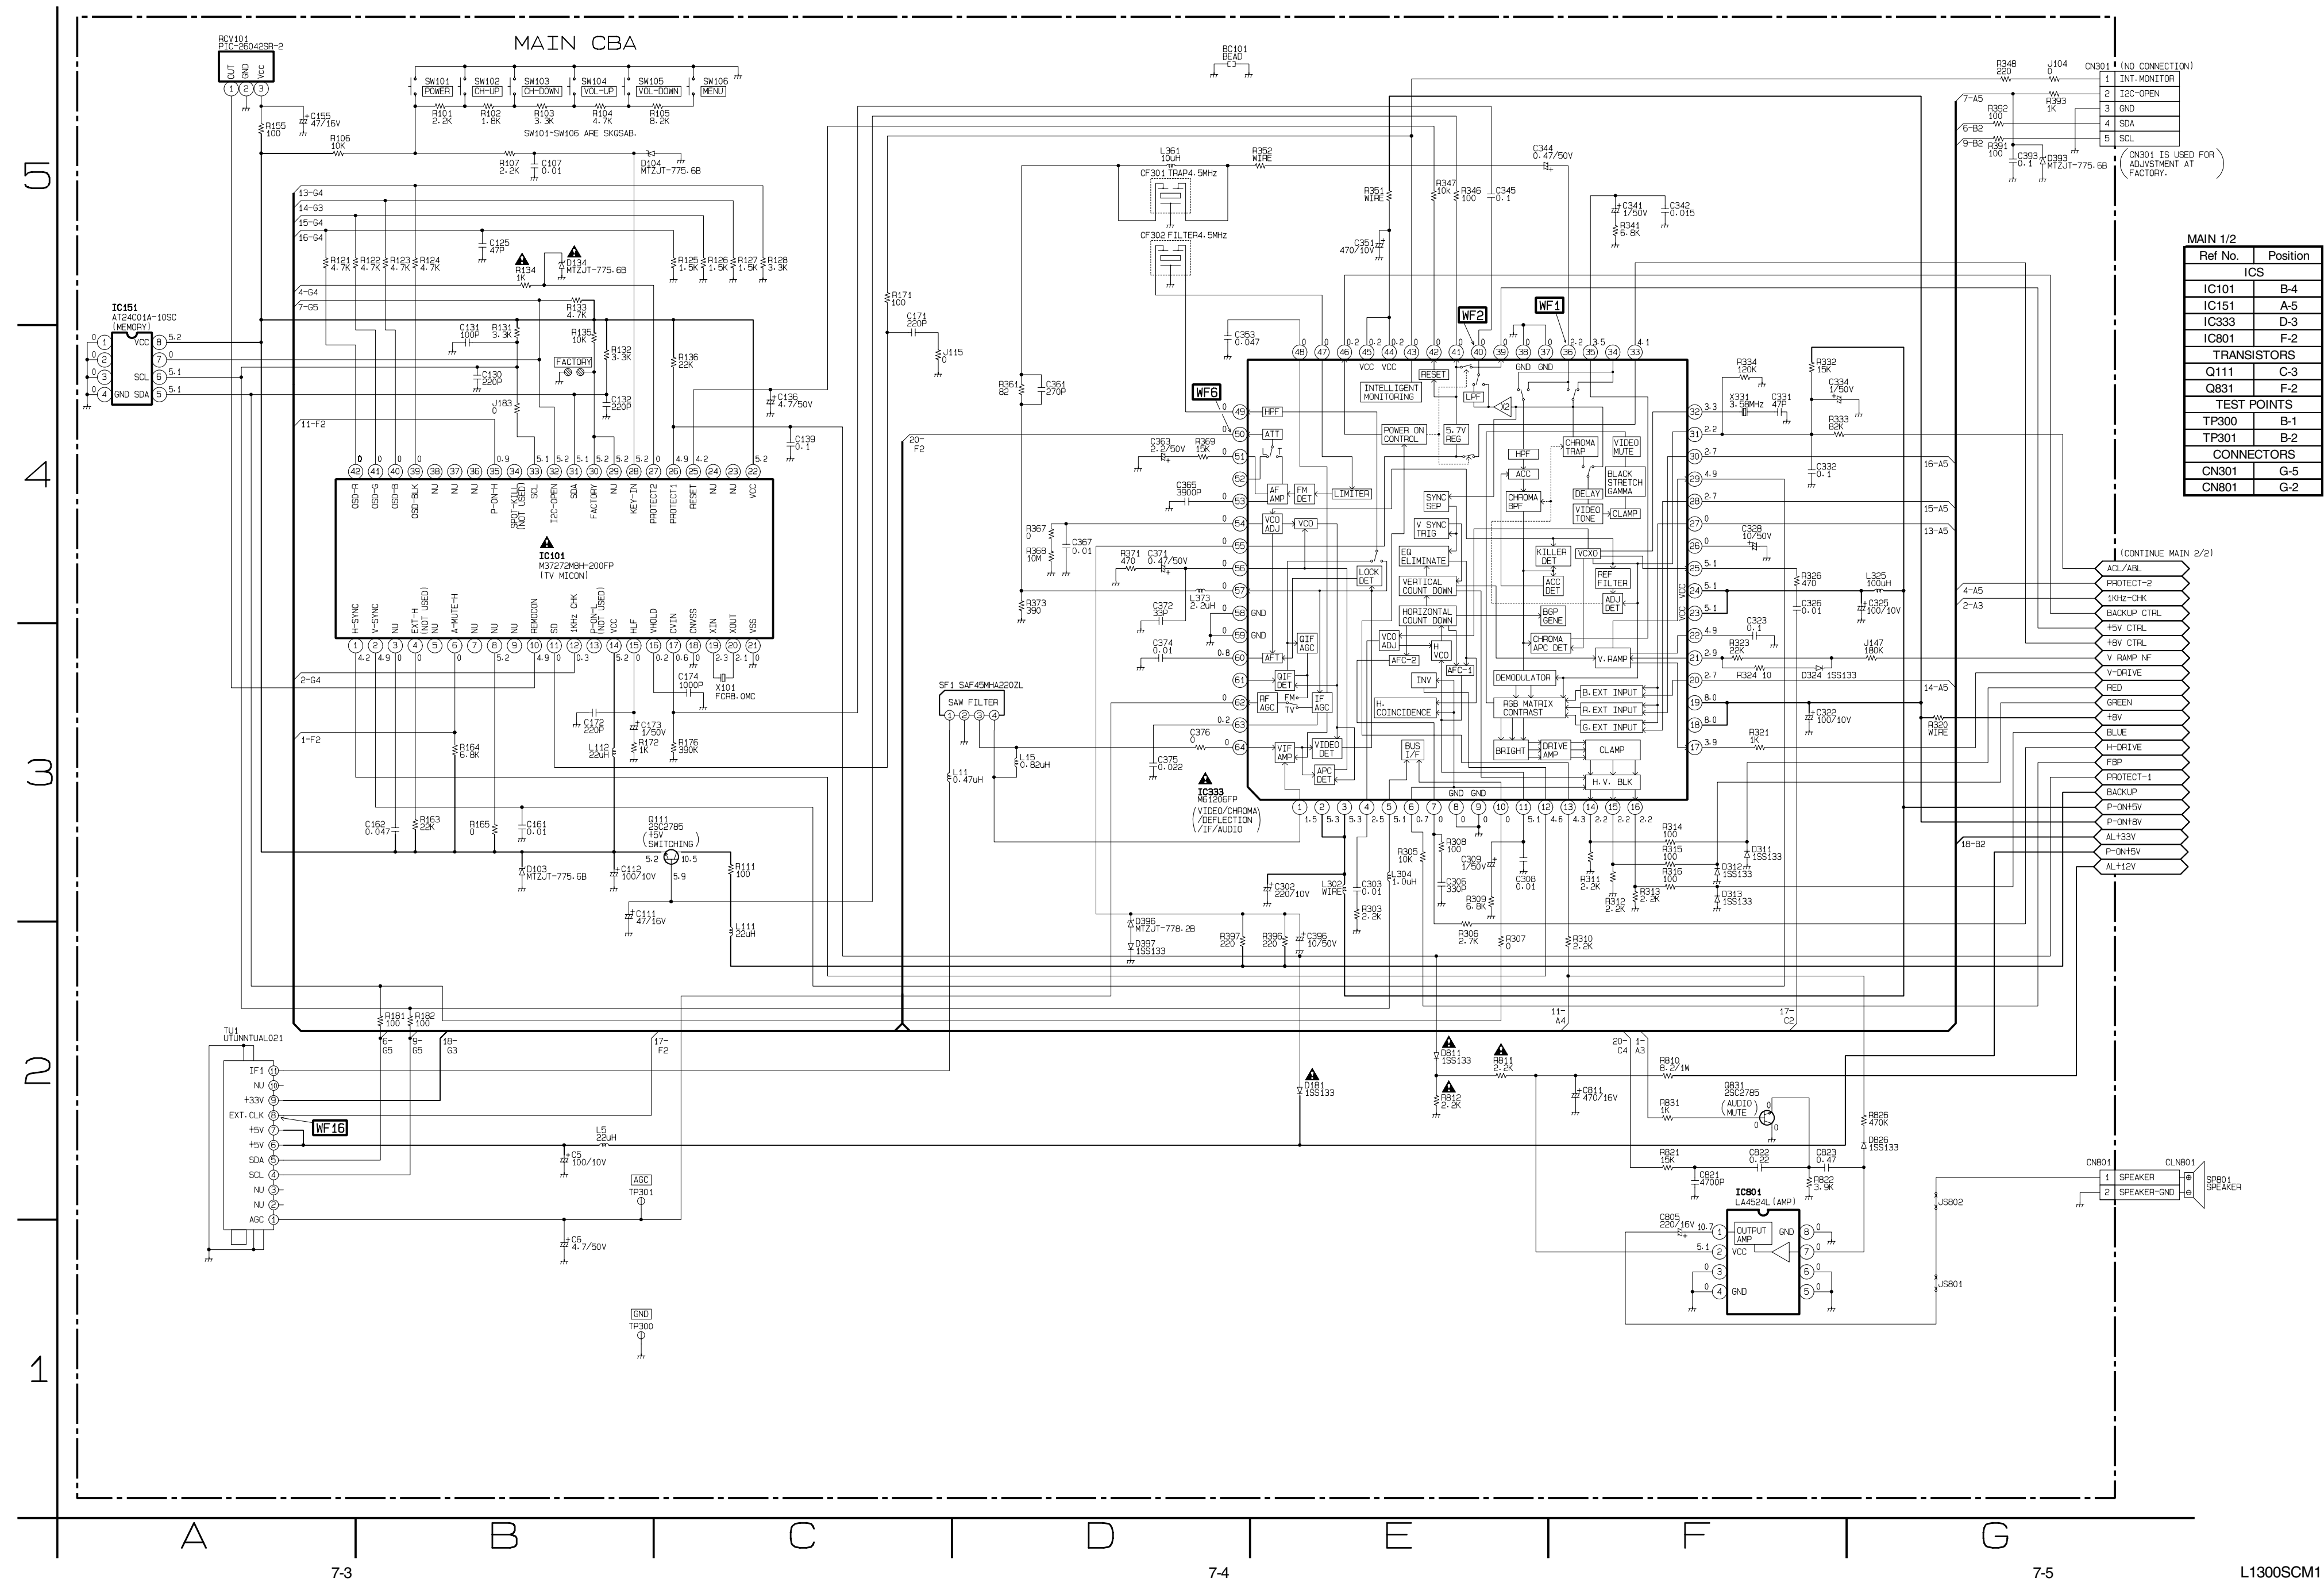

H5	I5	J5	K5	L5	M5	N5
H4	I4	J4	K4	L4	M4	N4
H3	I3	J3	K3	L3	M3	N3
H2	I2	J2	K2	L2	M2	N2
H1	I1	J1	K1	L1	M1	N1

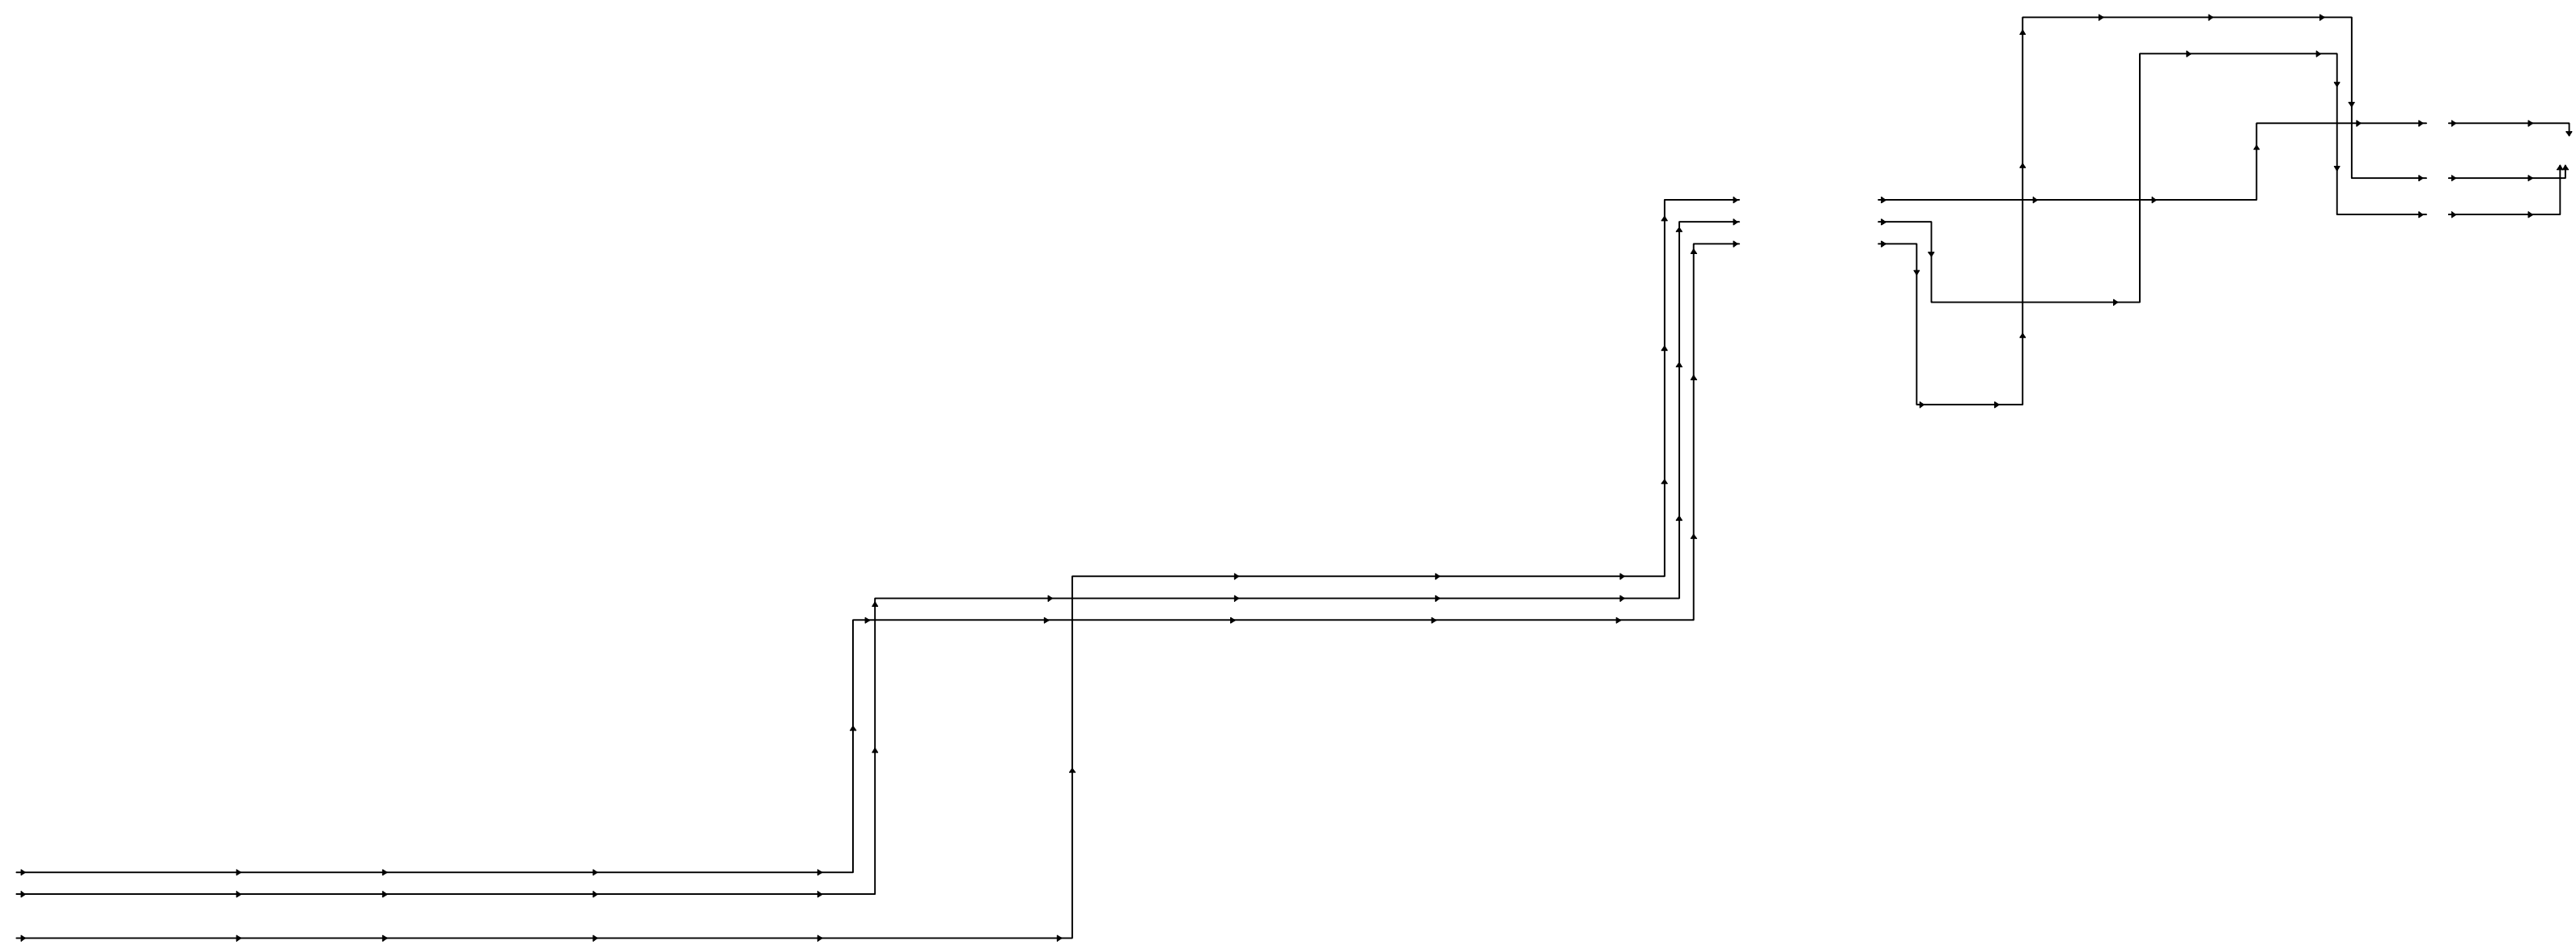

VIDEO SIGNAL


Main 2/2 & CRT Schematic Diagram

CAUTION !
Fixed voltage power supply circuit is used in this unit.
If Main Fuse (F601) is blown, check to see that all components in the power supply circuit are not defective before you connect the AC plug to the AC power supply.
Otherwise it may cause some components in the power supply circuit to fail.

CAUTION
FOR CONTINUED PROTECTION AGAINST FIRE HAZARD,
REPLACE ONLY WITH THE SAME TYPE FUSE.
ATTENTION : POUR UNE PROTECTION CONTINUE LES RISQUES
D'INCENDIE N'UTILISER QUE DES FUSIBLE DE MEMO TYPE.
RISK OF FIRE-REPLACE FUSE AS MARKED.
*This symbol means fast operating fuse.
*Ce symbole représente un fusible à fusion rapide.


BECAUSE A HOT CHASSIS GROUND IS PRESENT IN THE POWER SUPPLY CIRCUIT, AN ISOLATION TRANSFORMER MUST BE USED. ALSO, IN ORDER TO HAVE THE ABILITY TO INCREASE THE INPUT SLOWLY, WHEN TROUBLESHOOTING THIS TYPE POWER SUPPLY CIRCUIT, A VARIABLE ISOLATION TRANSFORMER IS REQUIRED.

NOTE :
The voltage for parts in hot circuit is measured using hot GND as a common terminal.

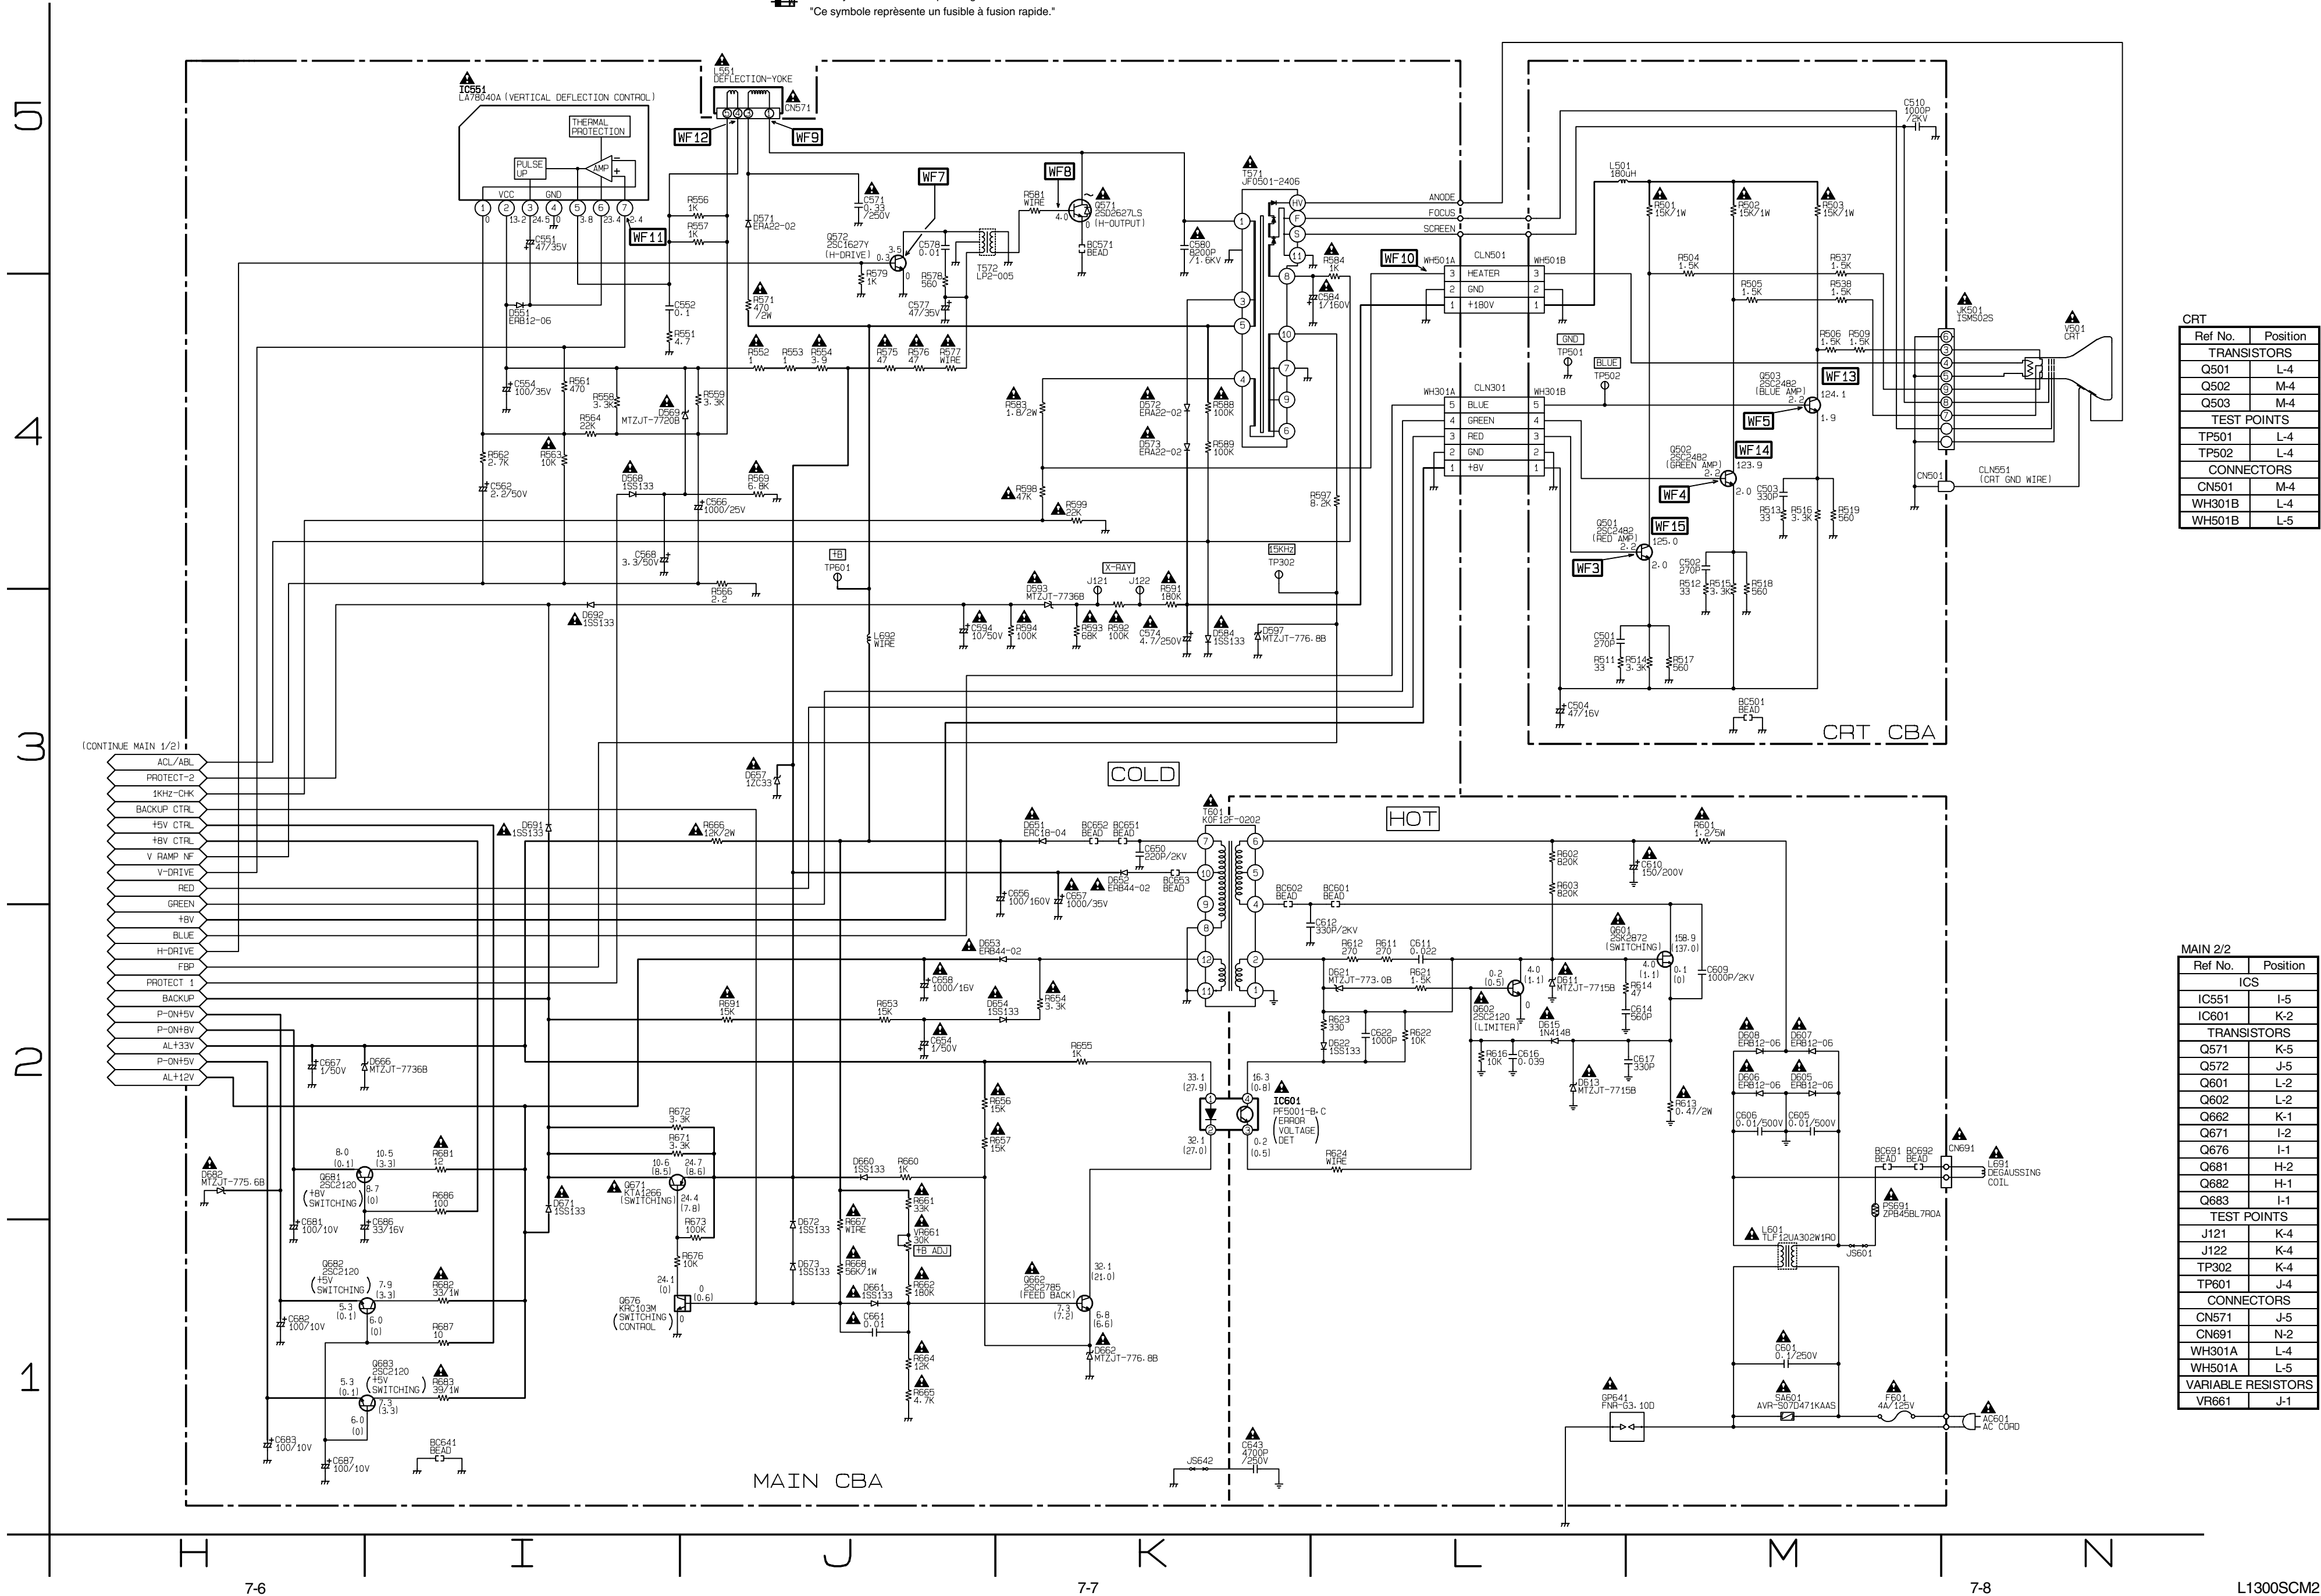


Main CBA Top View


CAUTION !
Fixed voltage power supply circuit is used in this unit.
If Main Fuse (F601) is blown, check to see that all components in the power supply circuit are not defective before you connect the AC plug to the AC power supply. Otherwise it may cause some components in the power supply circuit to fail.



CAUTION
FOR CONTINUED PROTECTION AGAINST FIRE HAZARD,
REPLACE ONLY WITH THE SAME TYPE FUSE.
ATTENTION : POUR UNE PROTECTION CONTINUE LES RISQUES
D'INCELE N'UTILISER QUE DES FUSIBLE DE MEMO TYPE.
RISK OF FIRE-REPLACE FUSE AS MARKED.


 "This symbol means fast operating fuse."
"Ce symbole représente un fusible à fusion rapide."

BECAUSE A HOT CHASSIS GROUND IS PRESENT IN THE POWER SUPPLY CIRCUIT, AN ISOLATION TRANSFORMER MUST BE USED. ALSO, IN ORDER TO HAVE THE ABILITY TO INCREASE THE INPUT SLOWLY, WHEN TROUBLESHOOTING THIS TYPE POWER SUPPLY CIRCUIT, A VARIABLE ISOLATION TRANSFORMER IS REQUIRED.

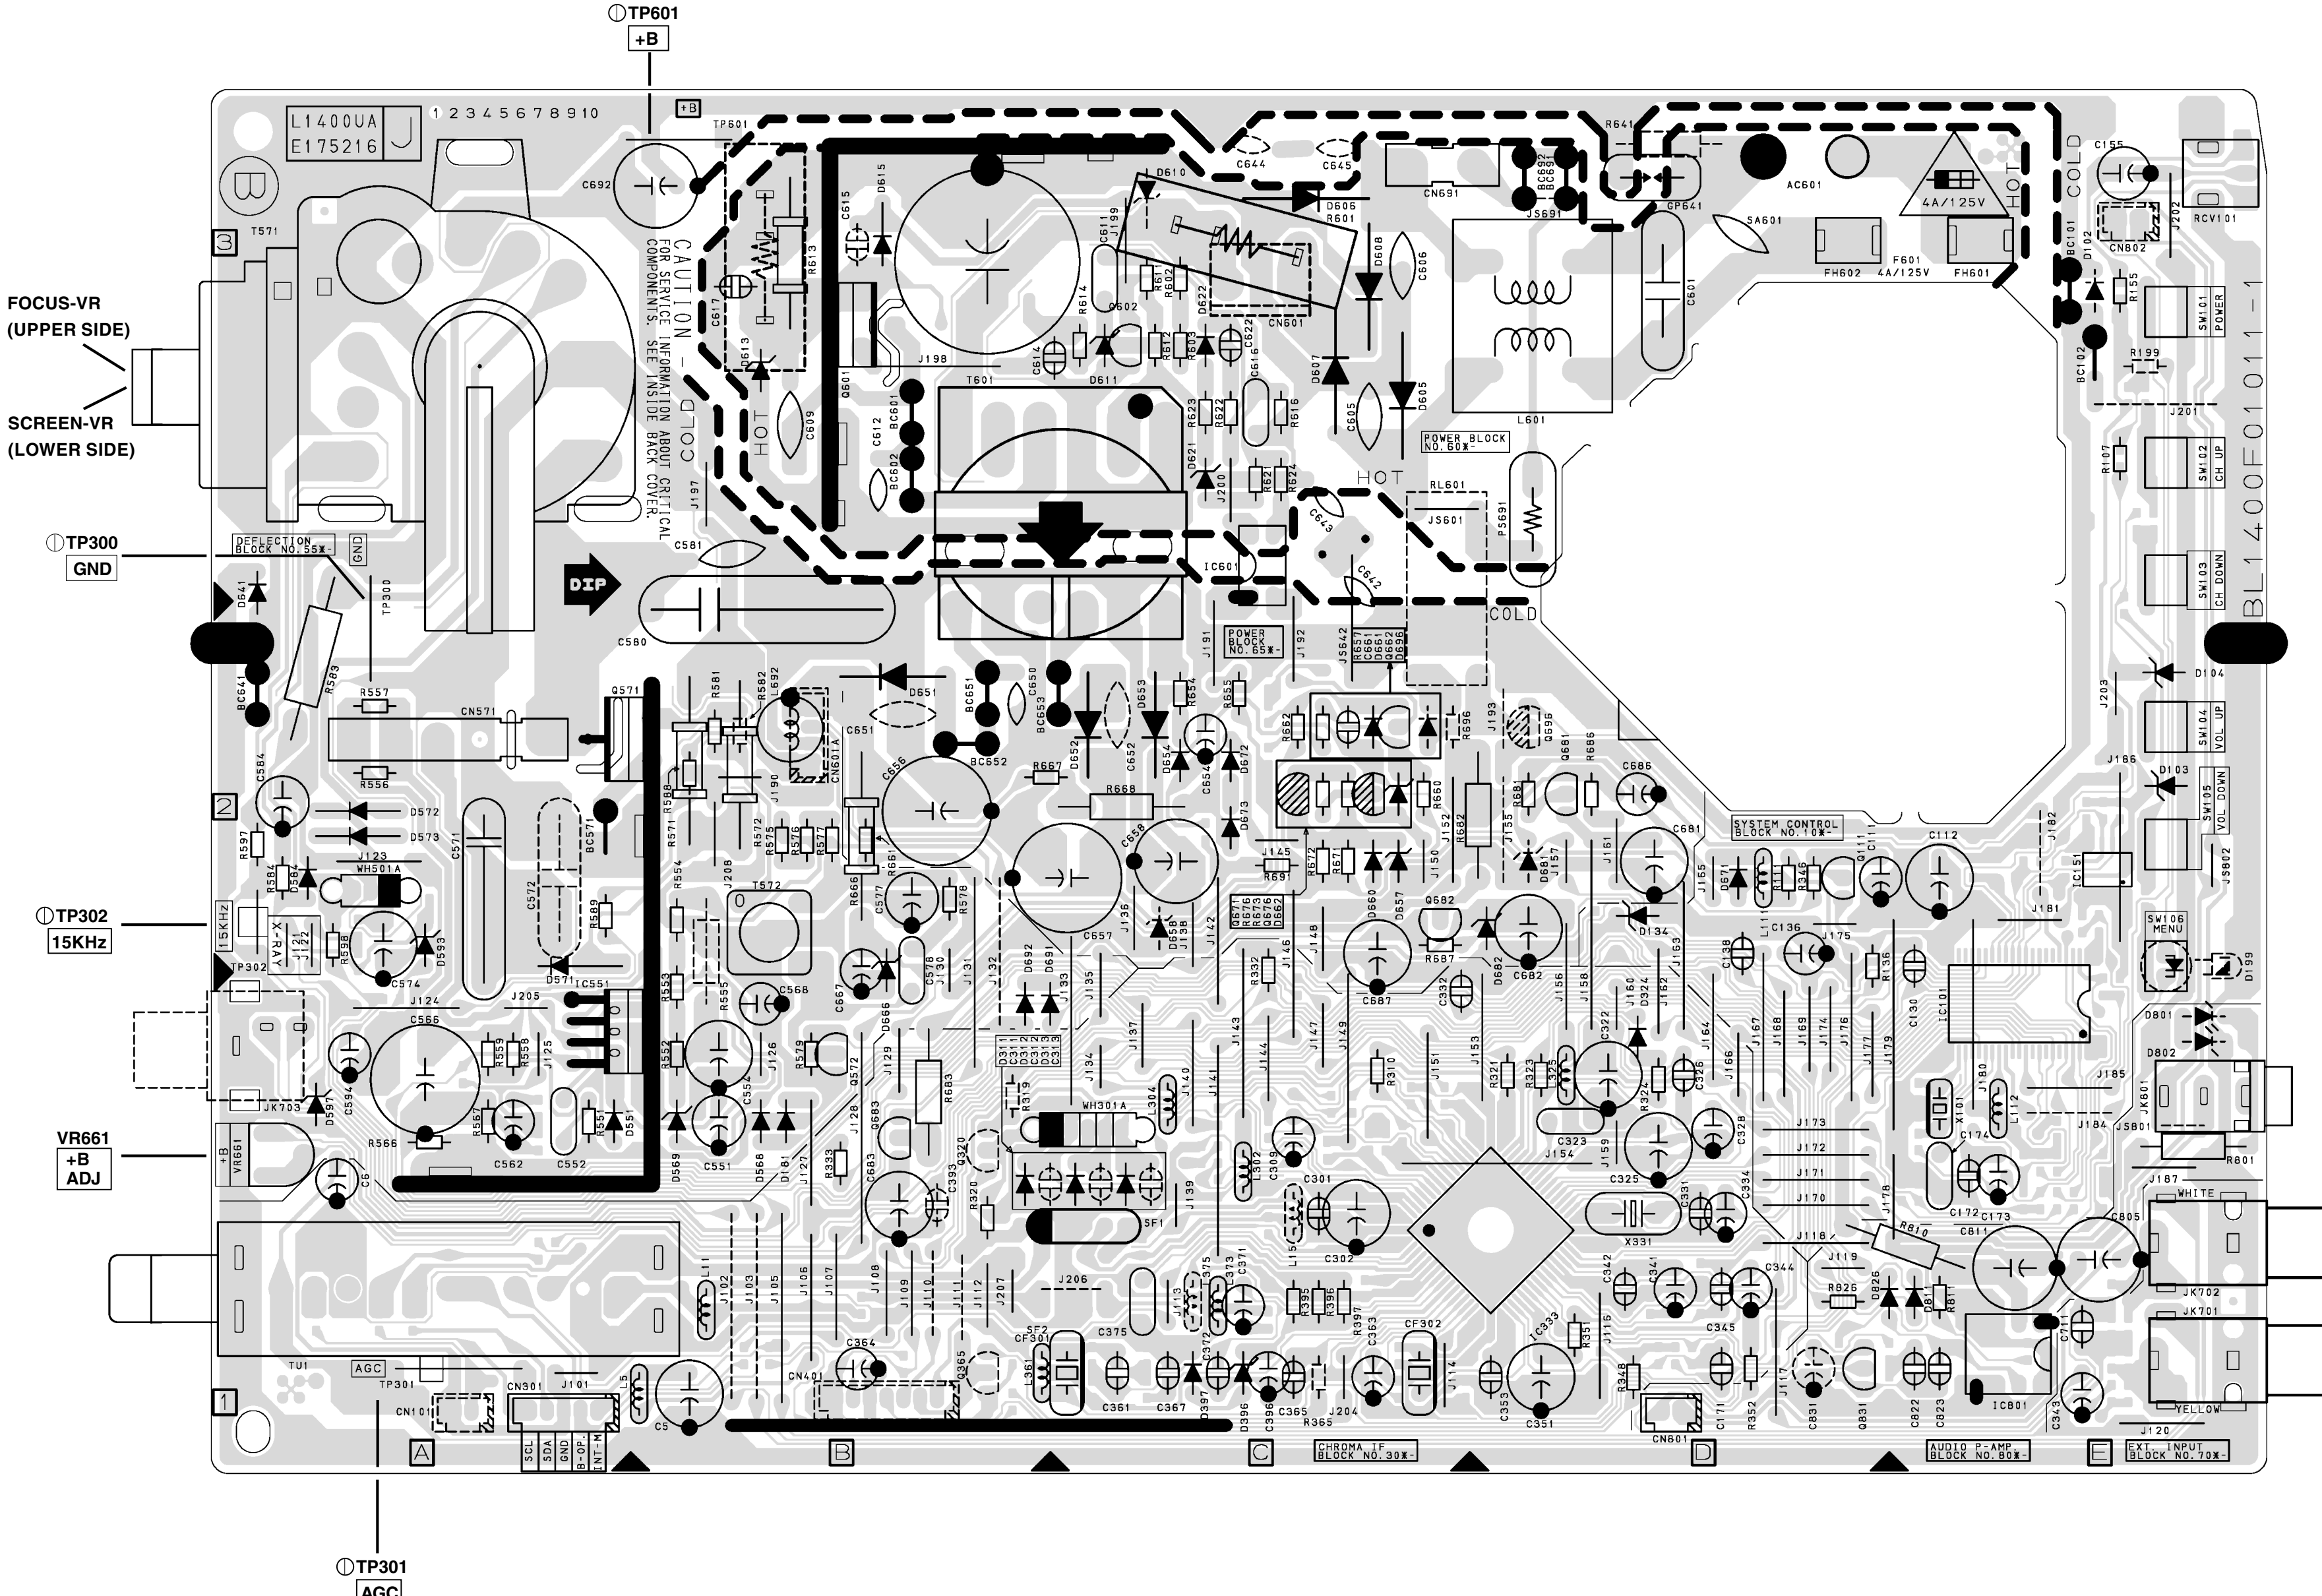


Main CBA Bottom View

CAUTION !
Fixed voltage power supply circuit is used in this unit.
If Main Fuse (F601) is blown, check to see that all components in the power supply circuit are not defective before you connect the AC plug to the AC power supply.
Otherwise it may cause some components in the power supply circuit to fail.



CAUTION
FOR CONTINUED PROTECTION AGAINST FIRE HAZARD,
REPLACE ONLY WITH THE SAME TYPE FUSE.
ATTENTION : POUR UNE PROTECTION CONTINUE LES RISQUES
D'INCELE N'UTILISER QUE DES FUSIBLE DE MEMO TYPE.
RISK OF FIRE-REPLACE FUSE AS MARKED.
This symbol means fast operating fuse.
Ce symbole représente un fusible à fusion rapide.

BECAUSE A HOT CHASSIS GROUND IS PRESENT IN THE POWER
SUPPLY CIRCUIT, AN ISOLATION TRANSFORMER MUST BE USED.
ALSO, IN ORDER TO HAVE THE ABILITY TO INCREASE THE INPUT
SLOWLY, WHEN TROUBLESHOOTING THIS TYPE POWER SUPPLY
CIRCUIT, A VARIABLE ISOLATION TRANSFORMER IS REQUIRED.

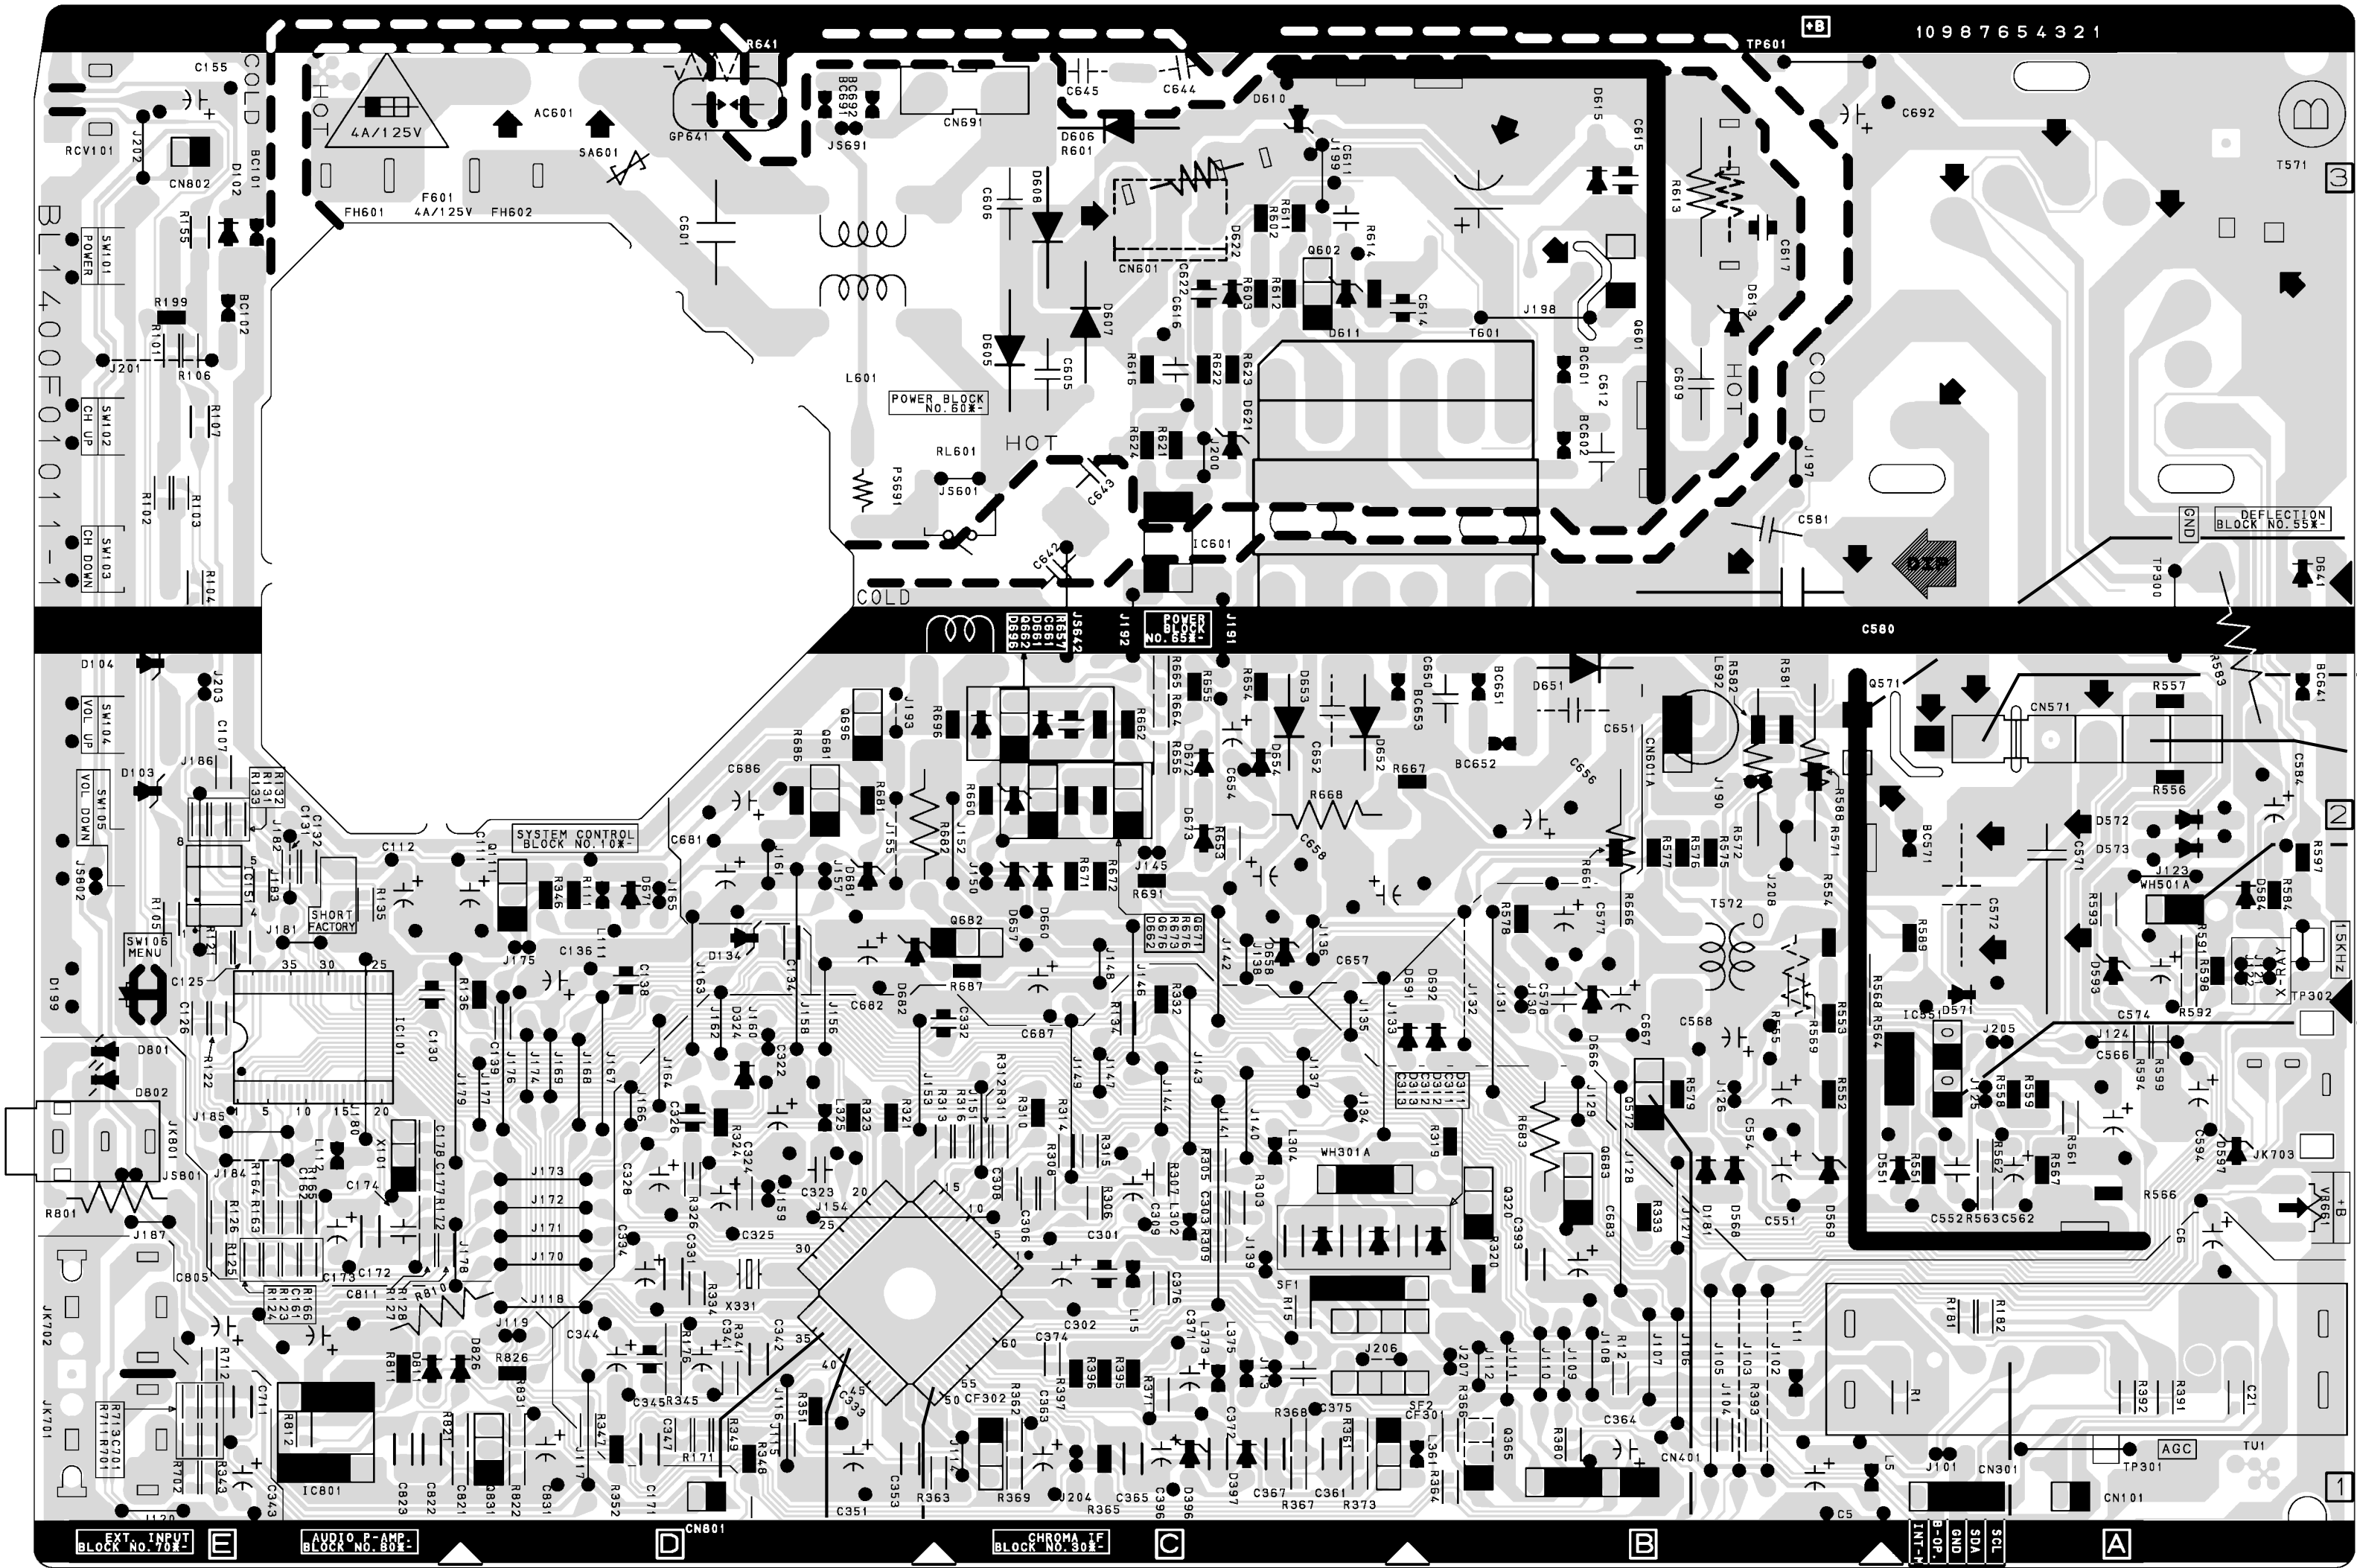

MAIN CBA	
Ref No.	Position
ICS	
IC101	E-1
IC151	E-2
IC333	D-1
IC551	A-1
IC601	C-3
IC801	E-1
TRANSISTORS	
Q111	D-2
Q571	A-2
Q572	B-1
Q601	B-3
Q602	C-3
Q662	C-2
Q671	C-2
Q676	C-2
Q681	D-2
Q682	C-2
Q683	B-1
Q831	D-1
TEST POINTS	
J121	A-2
J122	A-2
TP300	A-2
TP301	A-1
TP302	A-2
TP601	B-3
CONNECTORS	
CN301	A-1
CN571	A-2
CN691	C-3
CN801	D-1
WH301A	C-1
WH501A	A-2
VARIABLE RESISTORS	
VR661	A-1

WF1
PIN36
OF IC301

WF2
PIN 40
OF IC301

WF6
PIN50
OF IC301

WF7
Q572
Collector

WF16
PIN 8
OF TU1

WF8
Q571
Base


WF9
PIN 1
OF CN571

WF12
PIN 4
OF CN571


WF10
PIN 3
OF WH501A

WF11
PIN 7
OF IC551

CRT CBA Top View

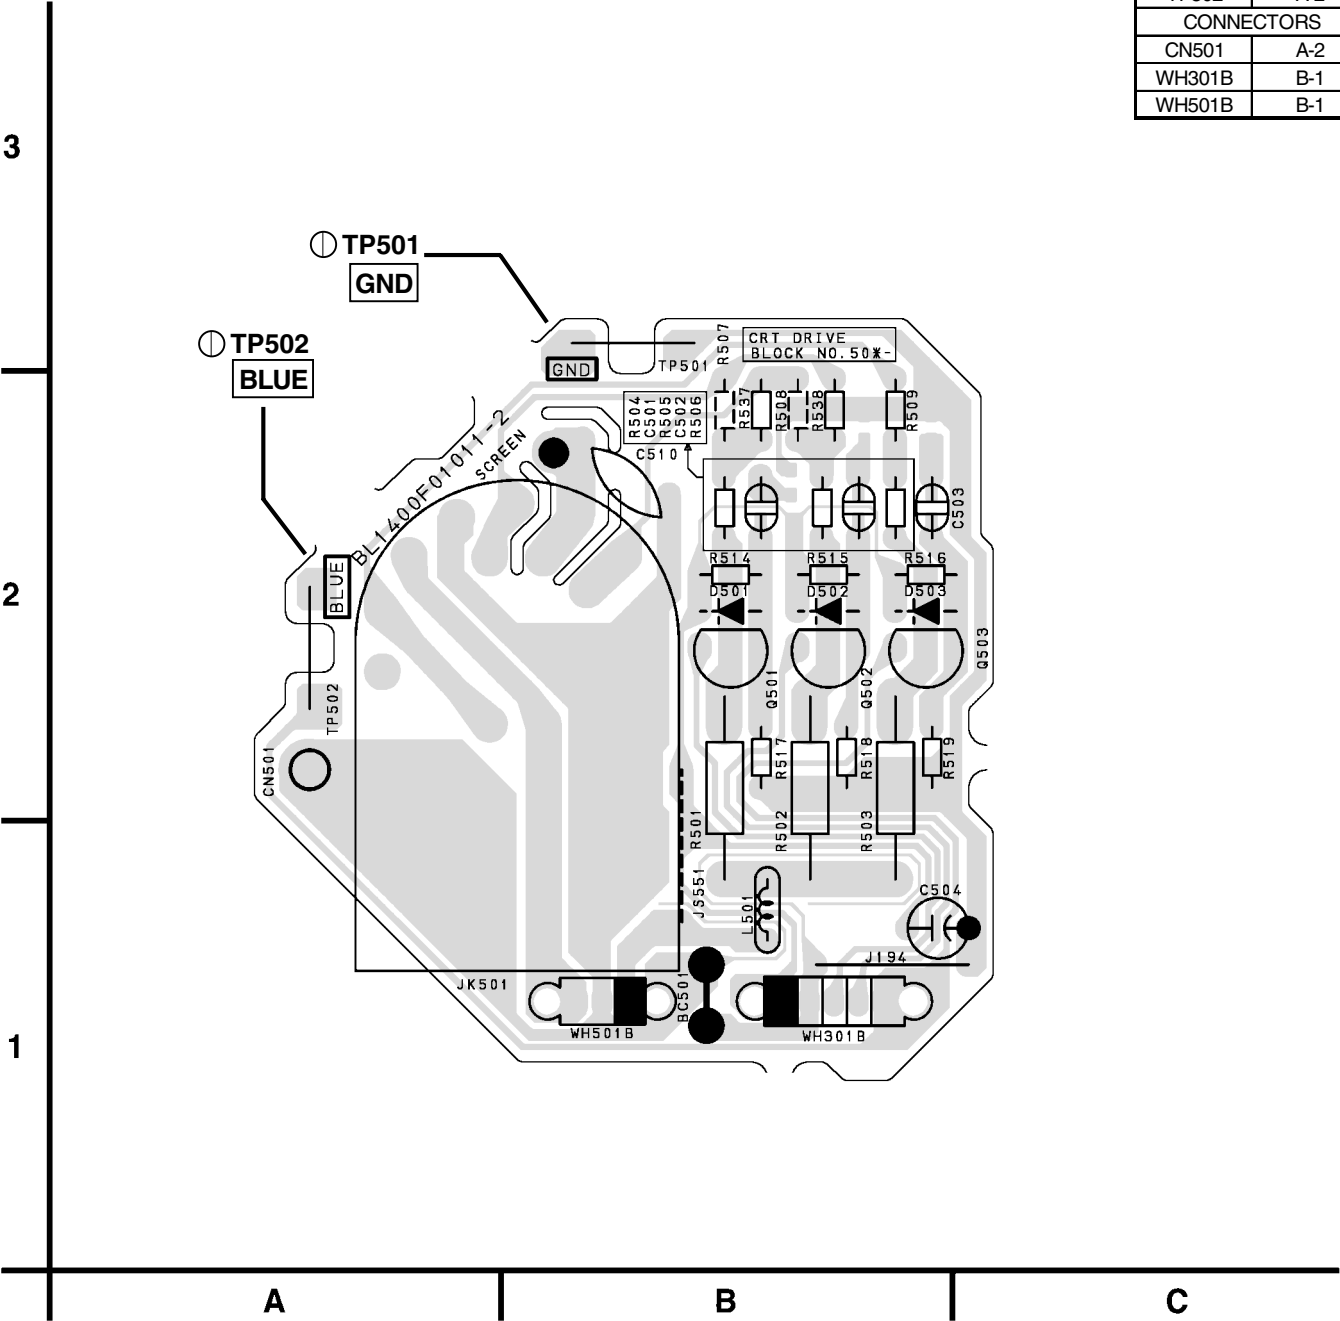

CRT CBA Bottom View
















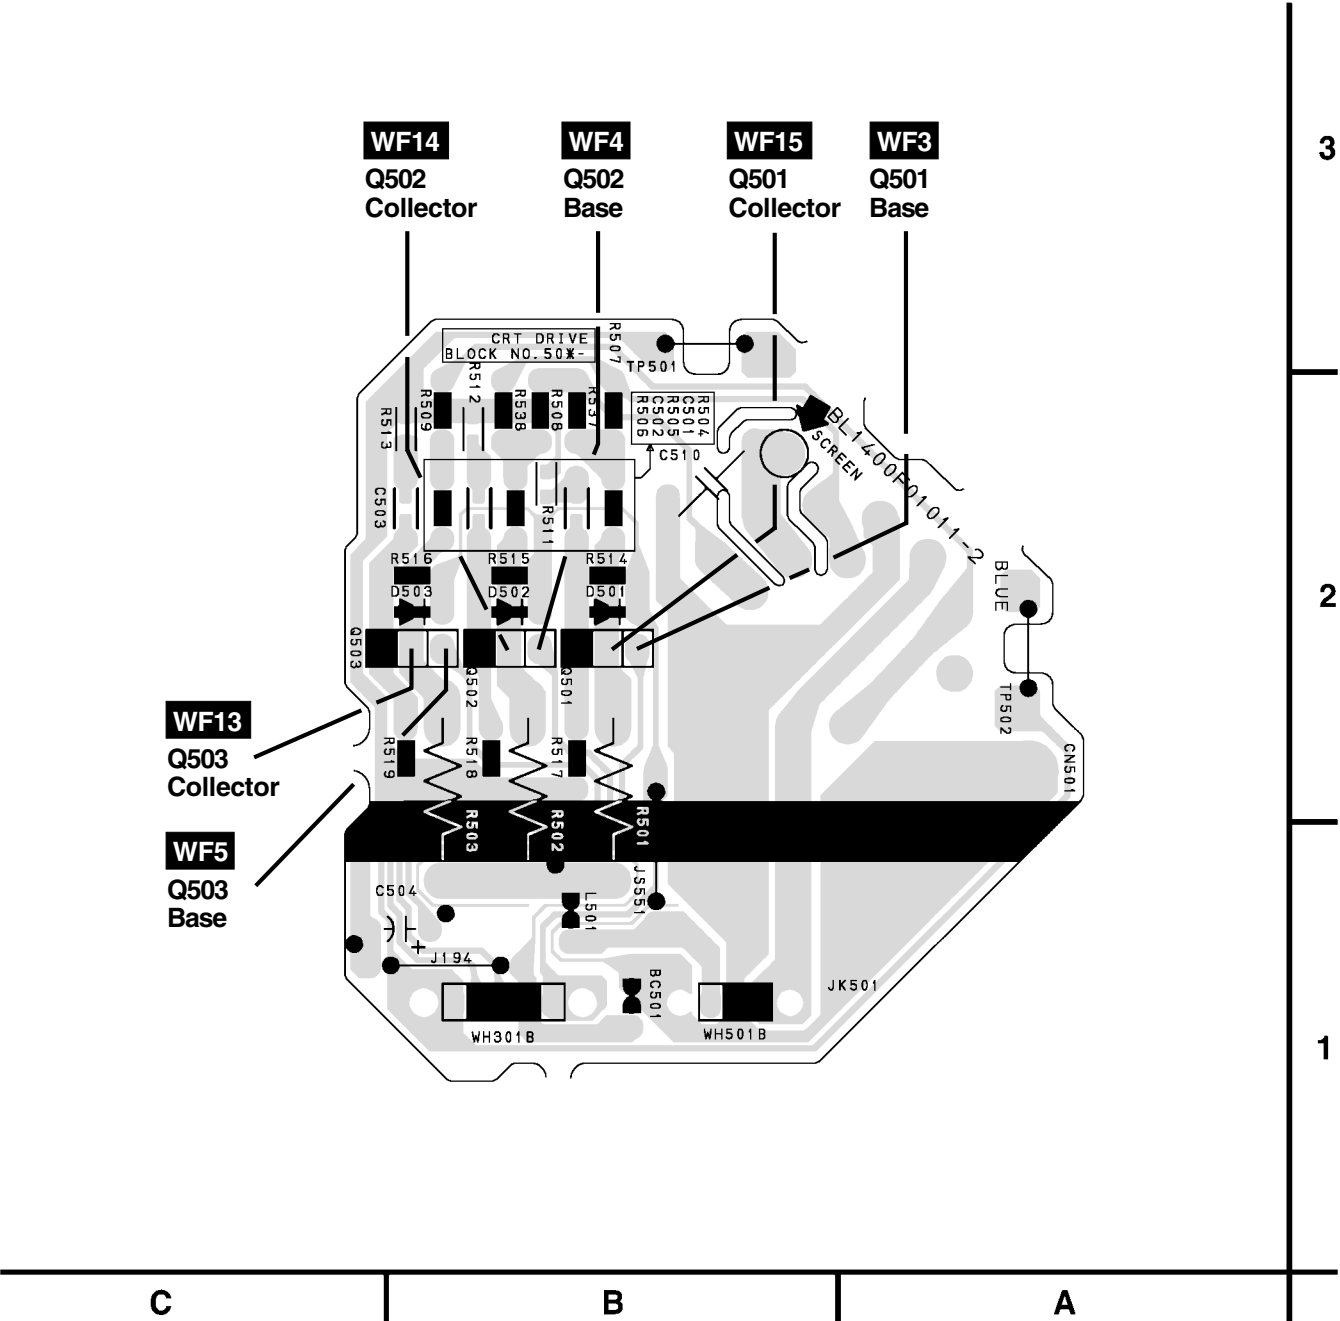


CRT CBA	
Ref No.	Position
TRANSISTORS	
Q501	B-2
Q502	B-2
Q503	C-2
TEST POINTS	
TP501	B-3
TP502	A-2
CONNECTORS	
CN501	A-2
WH301B	B-1
WH501B	B-1


WAVEFORMS

WF1 ~ WF16 = Waveforms to be observed at
Waveform check points.
(Shown in Schematic Diagram.)

Input: NTSC Color Bar Signal (with 1kHz Audio Signal)
INITIAL POSITION: Unplug unit from AC outlet for at least 5 minutes.
reconnect to AC outlet and then turn power on.
(Brightness---Center Color---Center Tint --- Center Contrast---Approx 70%)

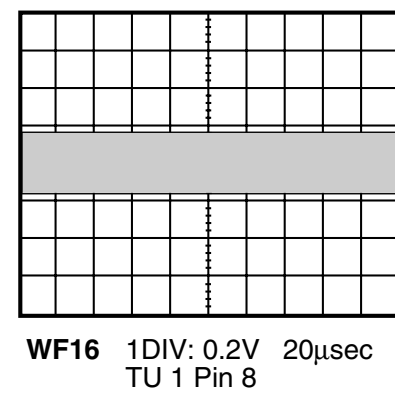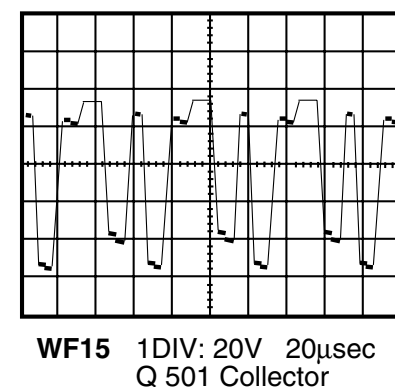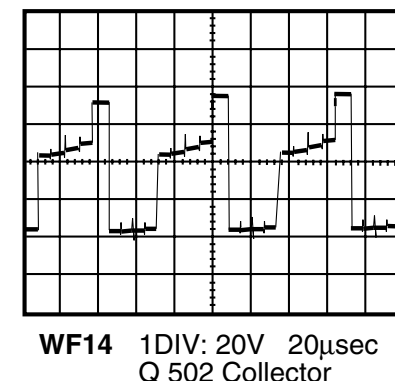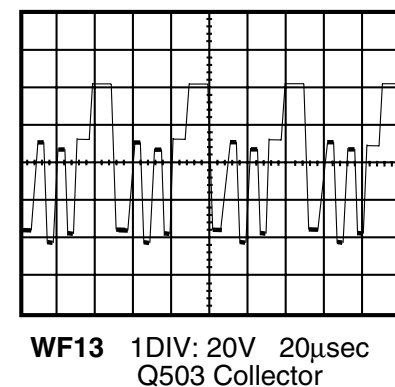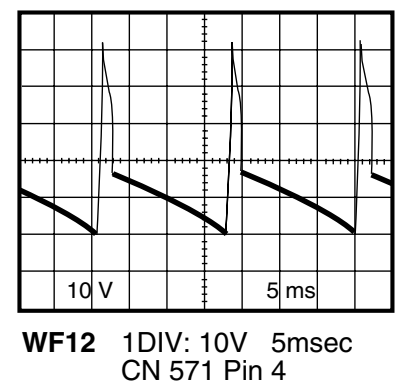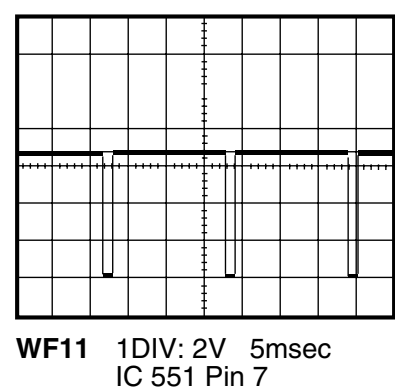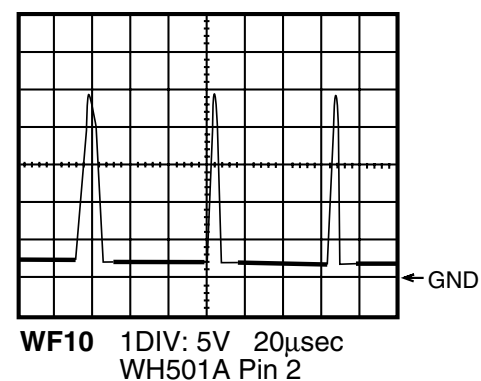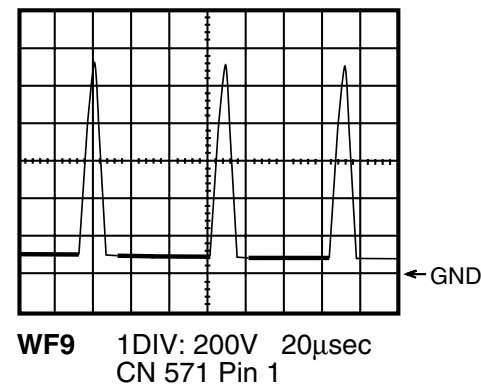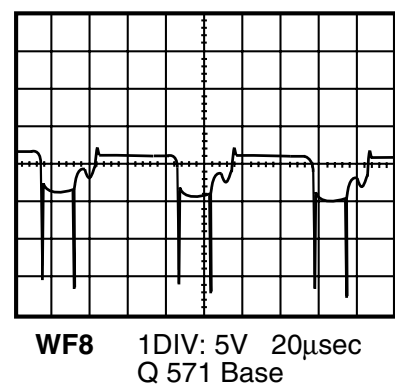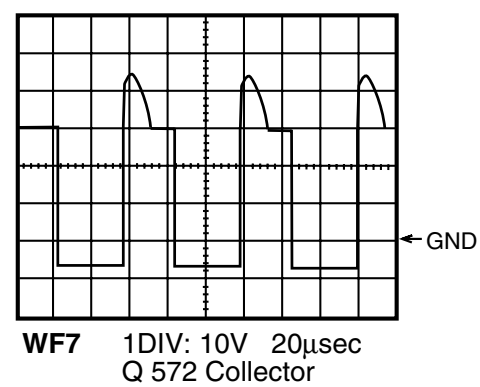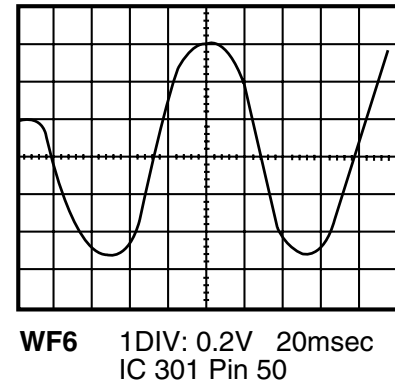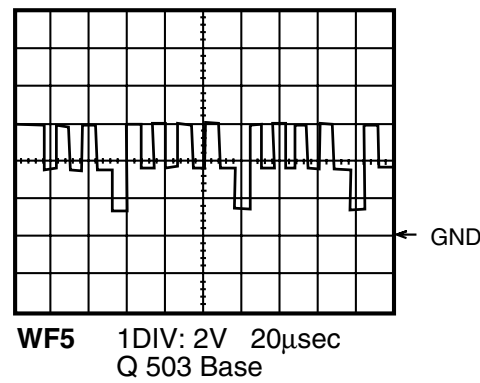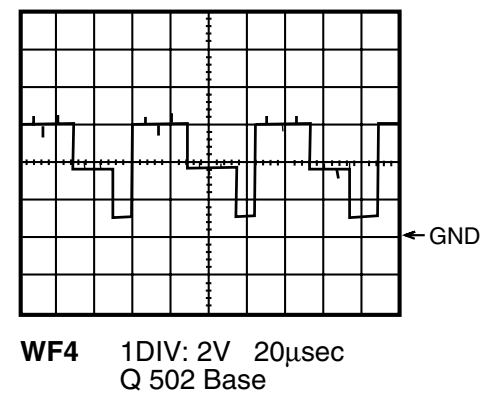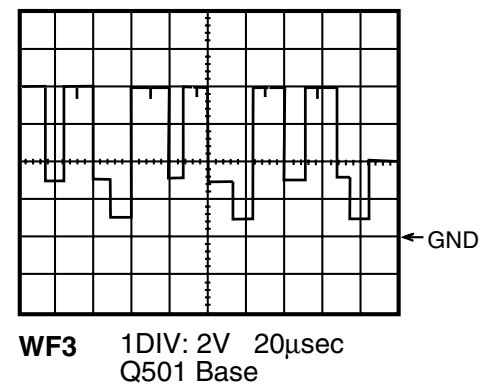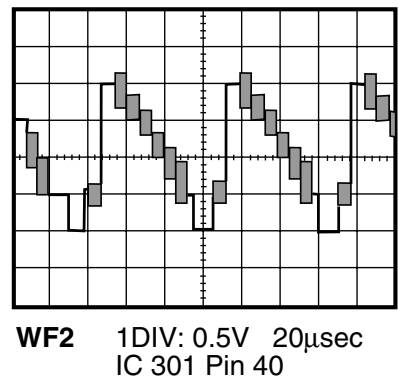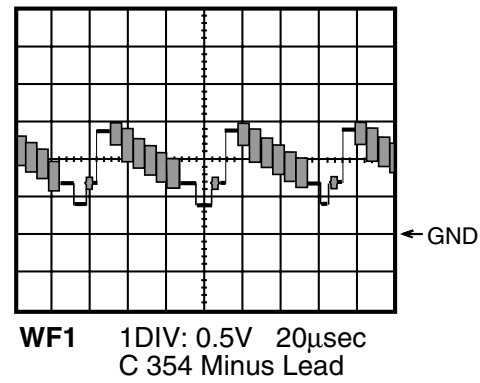

WIRING DIAGRAM

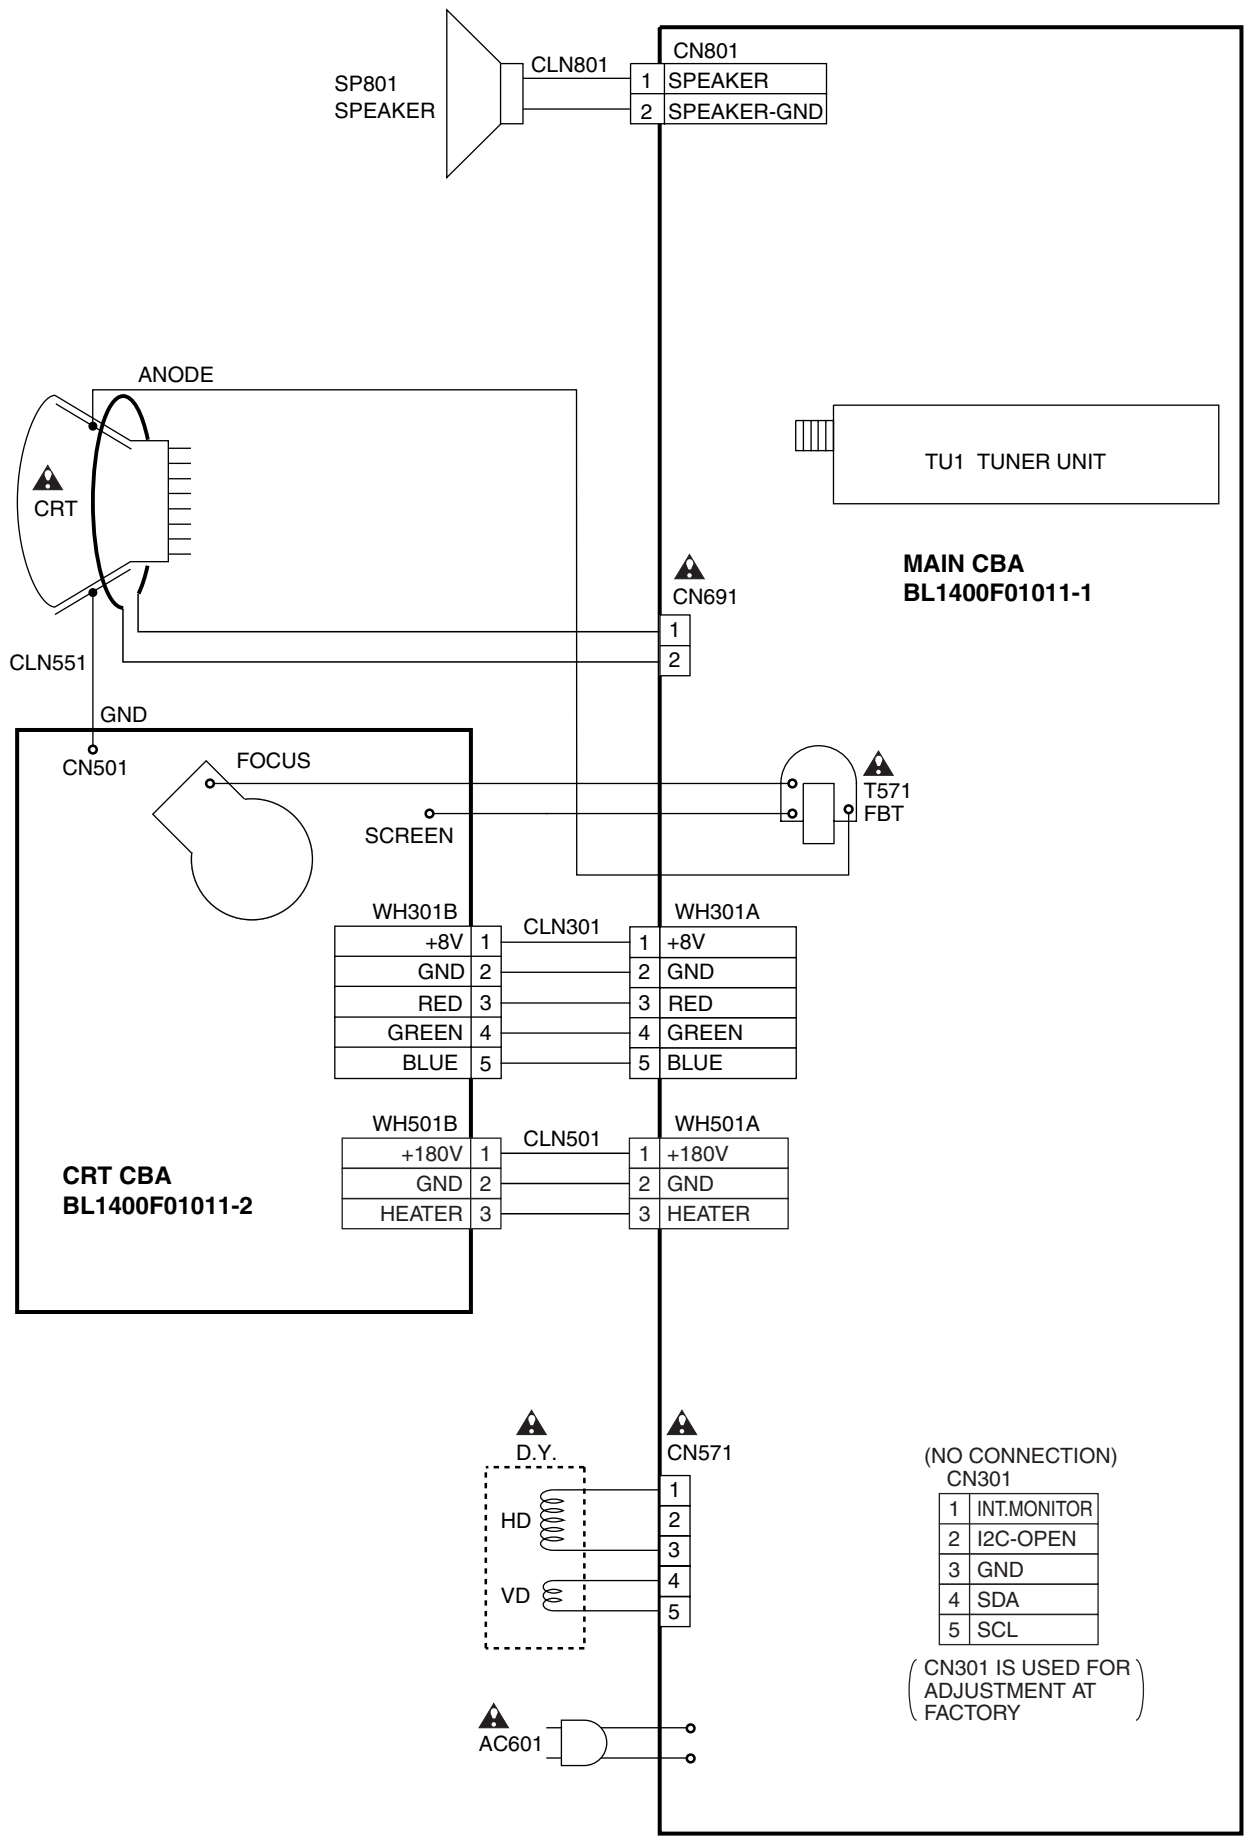

IC PIN FUNCTIONS

IC101 (TV Micro Computer)

Pin No.	Signal Name	Function
1	H-SYNC	Input For Horizontal Synchronize Signal
2	V-SYNC	Input For Vertical Synchronize Signal
3	N.U.	Not Used
4	EXT-H	Ext-H (Not Used)
5	N.U.	Not Used
6	A-MUTE-H	Audio Mute
7	N.U.	Not Used
8	N.U.	Not Used
9	N.U.	Not Used
10	REMO-CON	Input For Remote Control
11	SD	Detection SD signal
12	1kHz-CHK	Power Supply Protection
13	P-ON-L	Output for P-ON-L (Not Used)
14	VCC	+5V
15	HLF	Filter for CCD
16	VHOLD	VHOLD
17	CVIN	Input for Video Signal
18	CV Vss	GND
19	XIN	Input for Oscillator
20	XOUT	Output for Oscillator
21	VSS	GND
22	VCC	+5V
23	N.U.	Not Used
24	N.U.	Not Used
25	RESET	RESET
26	PROTECT-1	Power Supply Protection
27	PROTECT-2	Power Supply Protection
28	KEY-IN	Key Input (Main)
29	N.U.	Not Used
30	FACTORY	Factort Key Input
31	SDA	I2C-BUS Controller Interface (Data)
32	I2C-OPEN	White Balance Adjustment Judgement
33	SCL	I2C-BUS Controller Interface (Clock)

Pin No.	Signal Name	Function
34	SPOT-KILL	Spot Countermeasure (Not Used)
35	P-ON-H	Output for P-ON-H
36	N.U.	Not Used
37	N.U.	Not Used
38	N.U.	Not Used
39	OSD-BLK	Picture Shut Down Output
40	OSD-B	Blue Output
41	OSD-G	Green Output
42	OSD-R	Red Output

IC301 (IF/Video/Chrominance/Deflection)


Pin No.	Signal Name	Function
1	IF IN 2	IF INput 2
2	IF-VCC1	IF-VCC 1
3	IF-VCC2	IF VCC 2
4	H. VCO-FB	H. VCO-FB
5	SCL	SCL
6	FBP- IN	FBP Input
7	H-OUT	H-Output
8	DEF GND 1	DEF GND 1
9	DEF GND 2	DEF GND 2
10	SDA	SDA
11	AFC FILTER 1	AFC Filter 1
12	INV. FBP-OUT	INV. FBP-OUT
13	P-ON-CTRL	Power on Control Output
14	R-OUT	R Output
15	G-OUT	G Output
16	B-OUT	B Output
17	V-OUT	Vertical Out
18	VCC 1	Start up VCC 1
19	VCC 2	Start up VCC 2
20	B-IN	OSD Blue Input
21	V-RAMP NF	V Ramp NF

Pin No.	Signal Name	Function
22	V RAMP	Filter for V Ramp
23	VC-VCC1	VC VCC 1
24	VC-VCC2	VC VCC 2
25	FSC-OUT	Freq. Sub carrier Output
26	SPOT-KILLER	Spot-Killer
27	FAST BLK	Fast Blanking Input
28	G-IN	OSD Green Input
29	V PULSE OUT	V-Pulse Output
30	R-IN	OSD Red Input
31	ACL/ABL	ACL/ABL
32	X-TAL 3.58	Chroma Osc
33	8.7V OUT	8.7V Output
34	EXT-IN	External Input (Not Used)
35	CHROMA APC FILTER	Filter for CHROMA APC
36	TV-IN	TV Input
37	VC GND 1	VC GND 1
38	VC GND 2	VC GND 2
39	VC GND 3	VC GND 3
40	Y-SW OUT	Y-SW Output
41	5.7V OUT	5.7V Output
42	Reset	MCU Reset Output
43	INTERIGENT MONITOR	Interigent Monitor Out
44	Hi Vcc 1	Hi Vcc 1
45	Hi Vcc 2	Hi Vcc 2
46	SW. REG. CONT.	Switching Reg. Control Output
47	SIF LIMITER-IN	SIF Limitter Input
48	IF AGC FILTER 2	Filter for IF AGC
49	QIF OUT	QIF Output
50	AUDIO OUT	Audio Output
51	AUDIO BYPASS	Filter for Audio Bypass


Pin No.	Signal Name	Function
52	EXT AUDIO IN	External Audio In (Not Used)
53	FM DETECT OUT	RF Output
54	VIF VCO-FB	VIF VCO-FB
55	REG. Vcc IN	REG. Vcc Input
56	VIDEO APC FILTER	Filter for Video APC
57	VIDEO OUT	Video Out
58	IF GND 1	GND 1
59	IF GND 2	GND 2
60	AFT OUT	AFT Out
61	QIF IN	QIF Input (Not Used)
62	RF AGC OUT	RF AGC Out
63	IF AGC FILTER 1	Filter for IF AGC
64	IF IN 1	IF Input 1

EXPLODED VIEWS


Cabinet

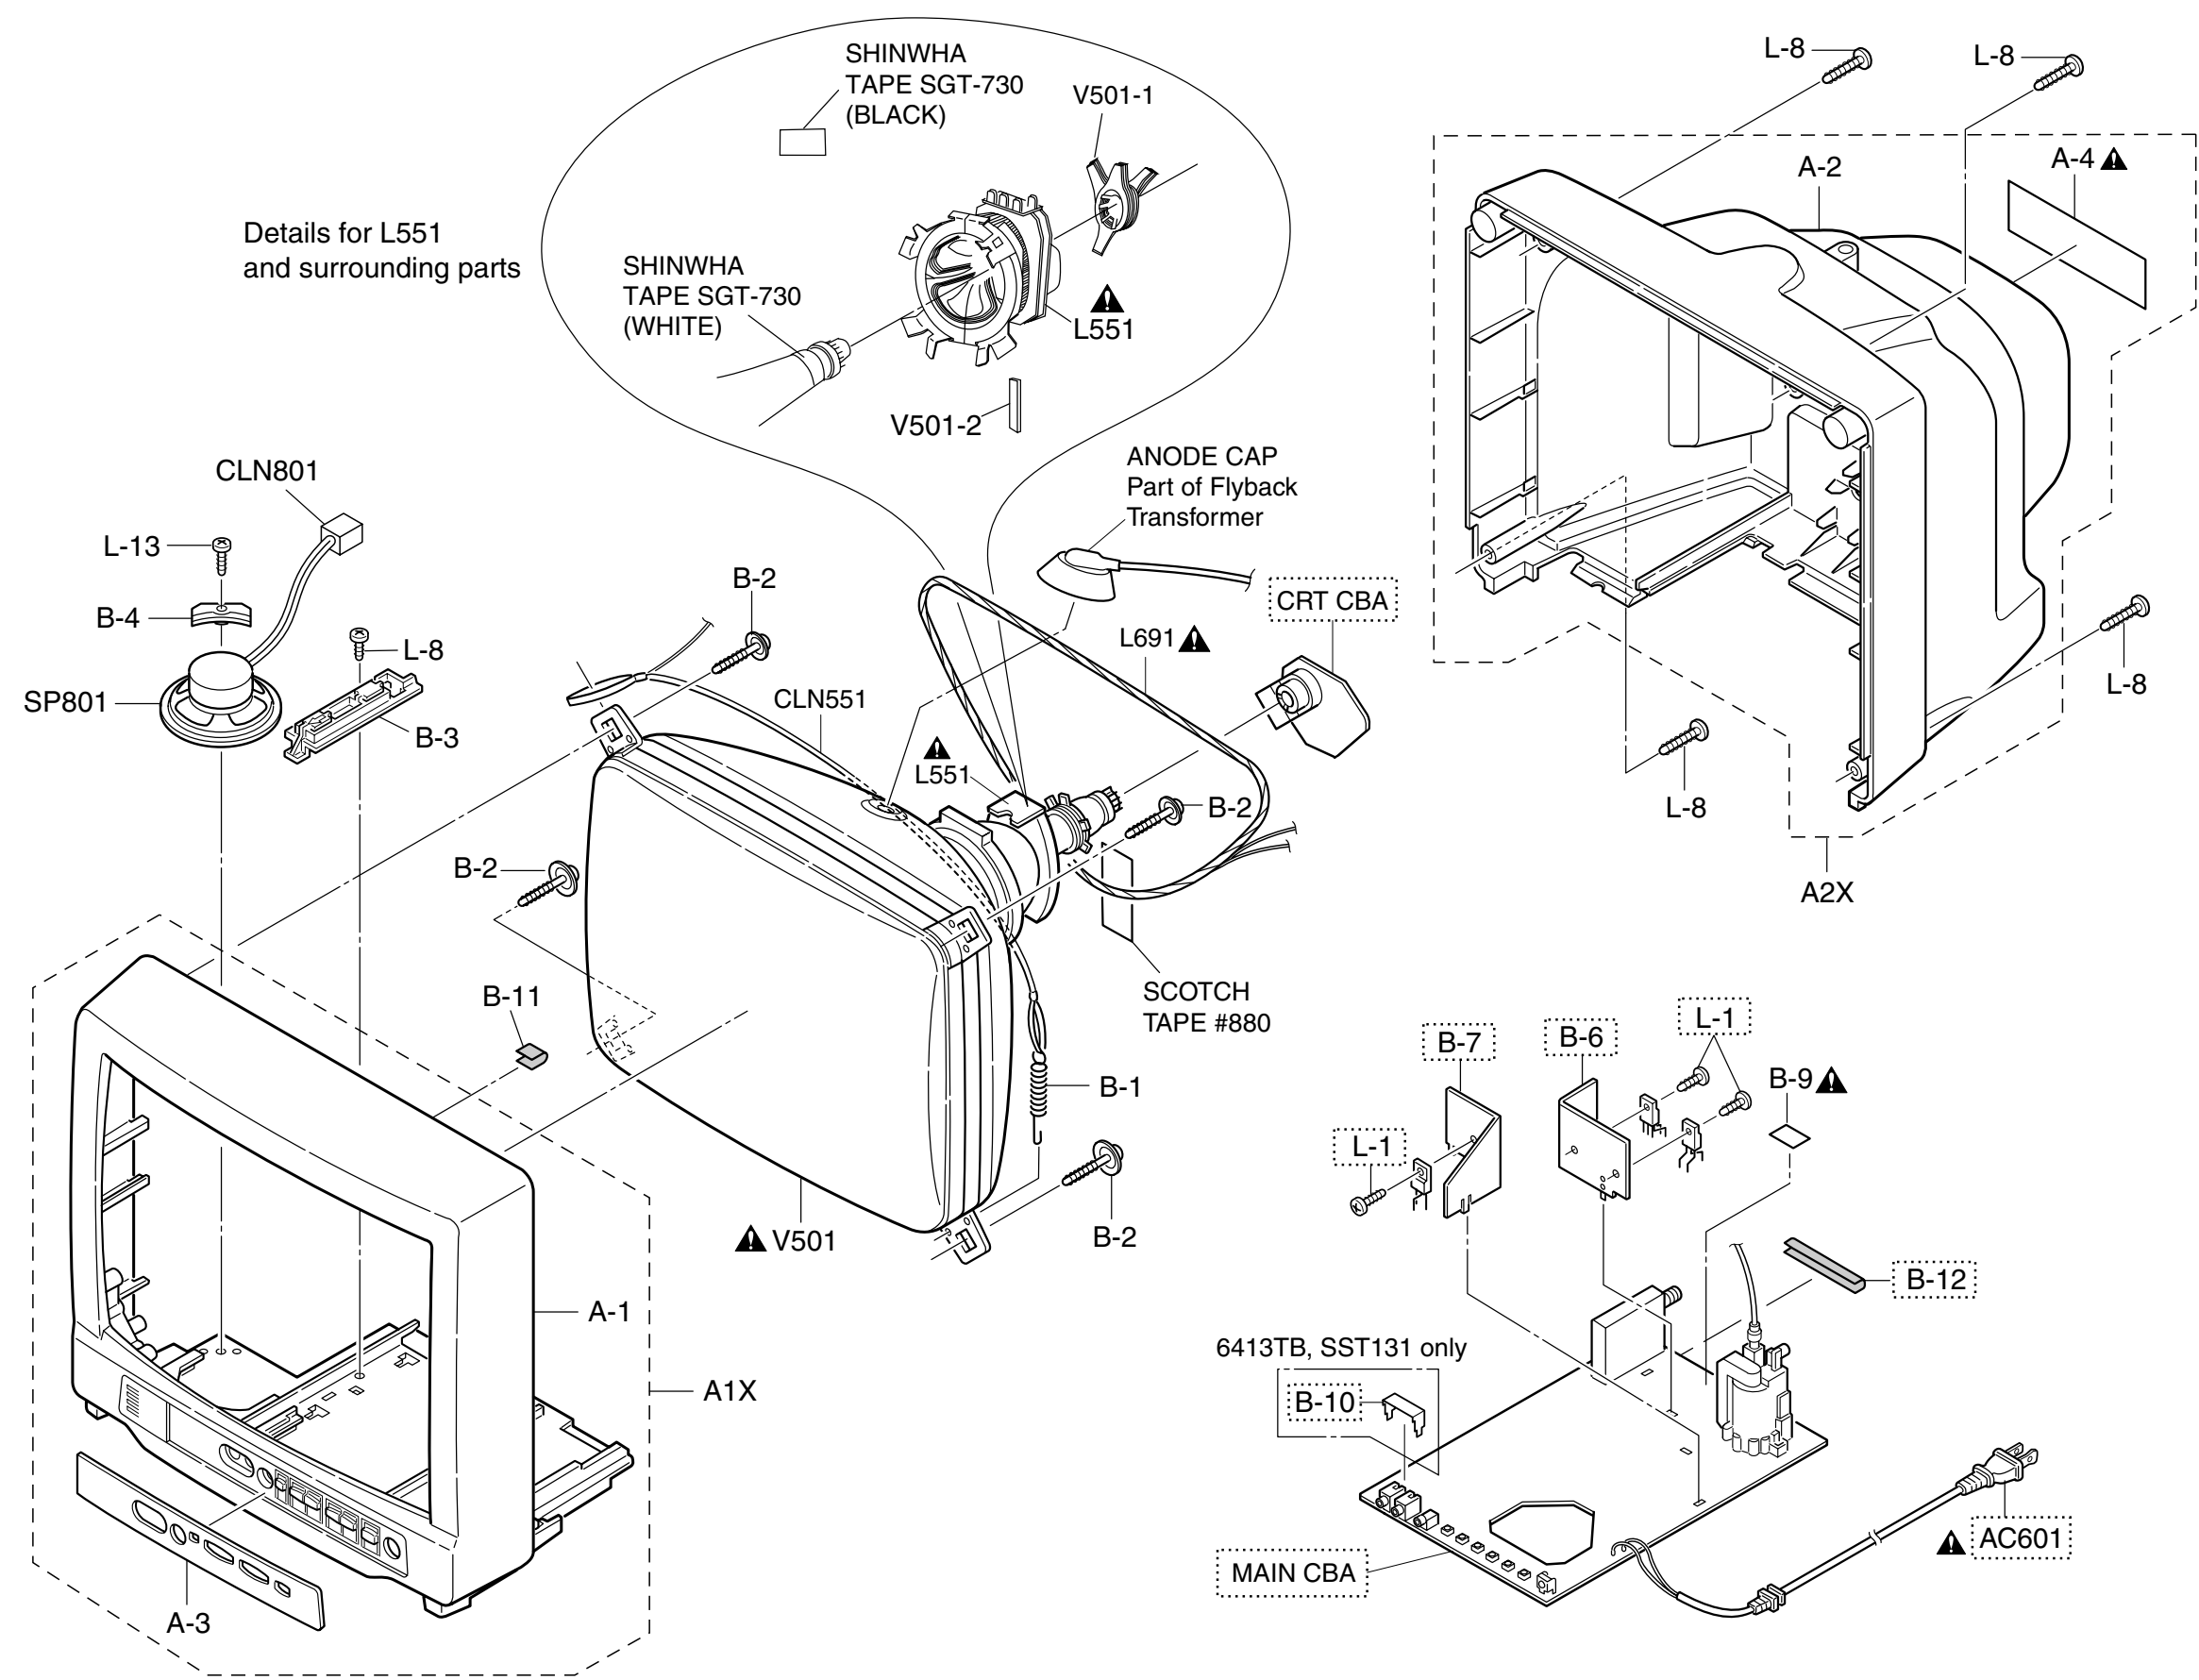

Packing

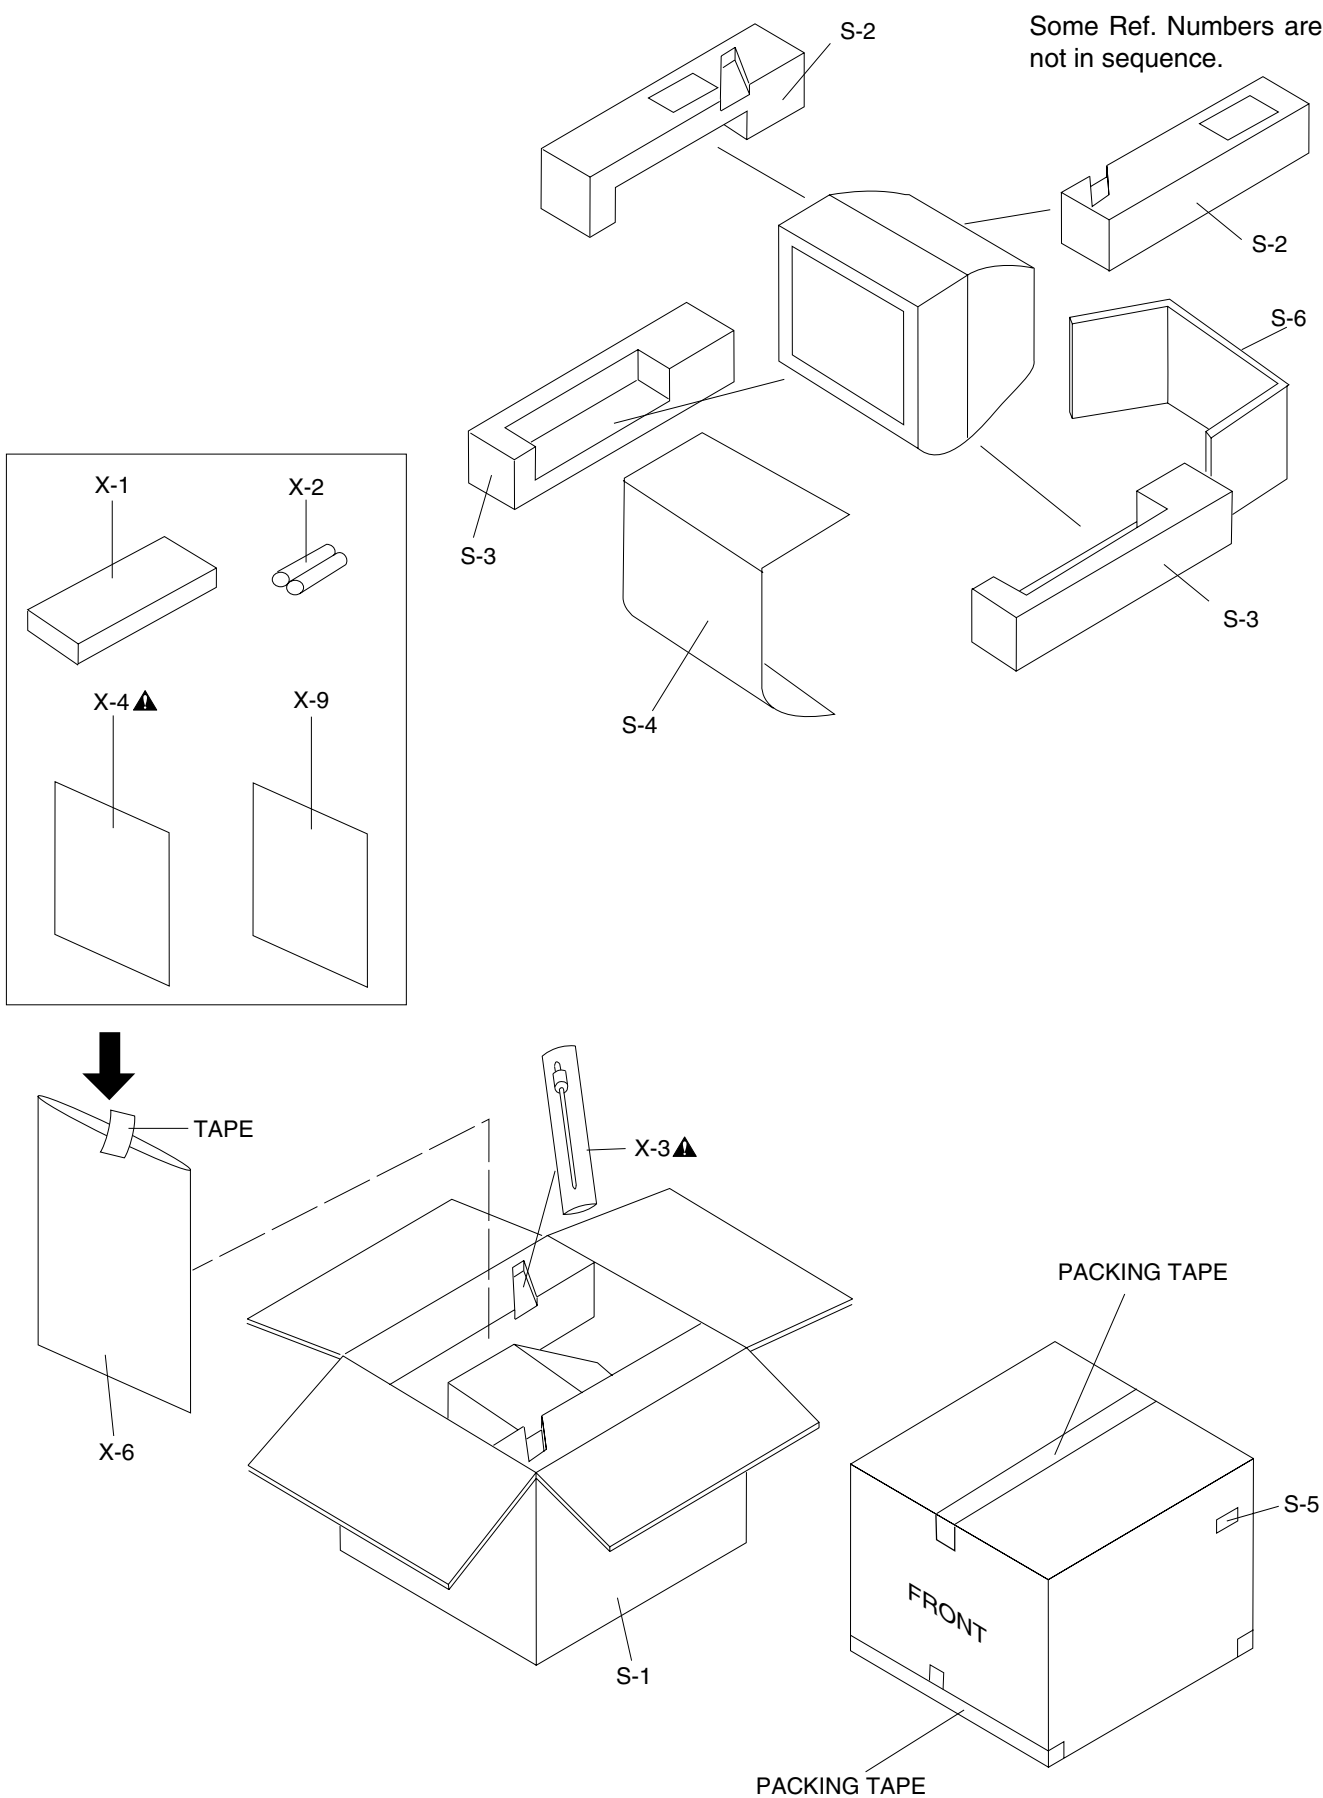

MECHANICAL PARTS LIST

PRODUCT SAFETY NOTE: Products marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully the product safety notice in this service manual. Don't degrade the safety of the product through improper servicing.

Ref No.	Description	Part No.
A1X	FRONT CABINET ASSEMBLY	0EM201369
A- 1	FRONT CABINET	0EM000485
A- 3	CONTROL PLATE	0EM301414
A2X	REAR CABINET ASSEMBLY	0EM201370
A- 2	REAR CABINET	0EM000481
A- 4 	RATING LABEL	0EM406034
B- 1	TENSION SPRING B0080B0:EM40808	26WH006
B- 2	M5 CRT SCREW(B)	0VM403923
B- 3	PCB HOLDER	0EM301412
B- 4	SPEAKER HOLDER	0EM406030
B- 9 	CHASSIS NO. LABEL	0EM406107
B- 11	CLOTH(B) L5201U0:15X10X1.0T	0EM400076
L- 8	SCREW, P-TIGHT 4X18 BIND HEAD +	GBMP4180
L- 13	SCREW, P-TIGHT 3X12 BIND HEAD+	GBMP3120
PACKING		
S- 1	CARTON	0EM301436
S- 2	STYRFOAM TOP	0EM101089
S- 3	STYRFOAM BOTTOM	0EM000503
S- 4	SET SHEET B5506UG:800X1500	0EM402369
S- 5	SERIAL NO. LABEL	0EM406035
S- 6	HOLD PAD	0EM101090
ACCESSORIES		
X- 1	REMOCON UNIT 130/ERC001/N0105UD or	N0105UD
	REMOCON UNIT 130/ERC001/N0127UD	N0127UD
X- 2	DRY BATTERY R6P UM3 or	XB0M451GH001
	DRY BATTERY R6P/2S or	XB0M451T0001
	DRY BATTERY(SUNRISE) R6SSE/2S or	XB0M451MS002
	DRY BATTERY R6P(AR)2PX or	XB0M451HU002
	DRY BATTERY R6P(AR)2P X ICI	XB0M451HU003
X- 3 	ROD ANTENNA L7720UA:NTSC W/COO or	0EMN00673
	ROD ANTENNA	0EMN01599
X- 4 	OWNER'S MANUAL(E)/(S) L1400UA:ENGLISH/SPANISH	0EMN01748
X- 6	POLYETHYLENE BAG F8626B5	Z325350
X- 9	RETURN STOP SHEET	0VM408869A
DE PARTS		
CLN551	CRT GND WIRE CRT GND	WX1L7720-001
CLN801	WIRE ASSEMBLY	WX1L9200-001
L 691 	DEGAUSSING COIL F-017 or	LLBH00ZTM017
	DEGAUSSING COIL AVDG013 or	LLBH00ZWR017
	DEGAUSSING COIL or	LLBH00ZTZ017
	DEGAUSSING COIL LLBH00ZTM022	LLBH00ZTM022
SP 801	SPEAKER S08J72A1 or	DSD0808XQ002
	SPEAKER S08J59B	DSD0808XQ001
Note: 1. V501 (CRT) HAS COUPLE OF SUBSTITUTIONAL PARTS AND EACH PARTS ALSO HAS MATCHING COMBINATION WITH L551. PLEASE SEE TABLE 1 FOR DETAILS OF MATCHING COMBINATION. 2. L551 (DEFLECTION YOKE) HAS MATCHING COMBINATION WITH V501. PLEASE SEE TABLE 1 FOR DETAILS OF MATCHING COMBINATION.		
CRT TYPE 1		

















Ref No.	Description	Part No.
V 501 	CRT A34AGT13X	TCRT190CP036
V501-1	C.P.MAGNET JH225-FN-00	XM04000BV003
V501-2	WEDGE FT-00110W or	XV10000T4001
	WEDGE DB25SR	XV10000D9001
L 551 	DEFLECTION YOKE KDY3GDA82X or	LLBY00ZMS011
	DEFLECTION YOKE LLBY00ZSY005	LLBY00ZSY005
CRT TYPE 2		
V 501 	CRT A34KPU02XX	TCRT190GS016
V501-1	C.P.MAGNET JH225-FN-00	XM04000BV003
V501-2	WEDGE FT-00110W or	XV10000T4001
	WEDGE DB25SR	XV10000D9001
L 551 	DEFLECTION YOKE LLBY00ZSY002 or	LLBY00ZSY002
	DEFLECTION YOKE KDY3GC587X	LLBY00ZMS003
CRT TYPE 3		
V 501 	CRT A34LEX10X	TCRT190SAM01
V501-1	C.P.MAGNET JH225-FN-00	XM04000BV003
V501-2	WEDGE FT-00110W or	XV10000T4001
	WEDGE DB25SR	XV10000D9001
L 551 	DEFLECTION YOKE KDY3GCB05X	LLBY00ZMS014
CRT TYPE 4		
V 501 	CRT A34JLL90X(W)	TCRT190QS015
V501-1	C.P.MAGNET JH225-FN-00	XM04000BV003
V501-2	WEDGE FT-00110W or	XV10000T4001
	WEDGE DB25SR	XV10000D9001
L 551 	DEFLECTION YOKE KDY3GD591X	LLBY00ZMS005
CRT TYPE 5		
V 501 	CRT A34KQW42X	TCRT190SM013
V501-1	C.P.MAGNET JH225-FN-00	XM04000BV003
V501-2	WEDGE FT-00110W or	XV10000T4001
	WEDGE DB25SR	XV10000D9001
L 551 	DEFLECTION YOKE KDY3GC734X or	LLBY00ZMS006
	DEFLECTION YOKE LLBY00ZSY002	LLBY00ZSY002
CRT TYPE 6		
V 501 	CRT A34LRQ90X(VW)	TCRT190P7003
V501-1	C.P.MAGNET JH225-FN-00	XM04000BV003
V501-2	WEDGE FT-00110W or	XV10000T4001
	WEDGE DB25SR	XV10000D9001
L 551 	DEFLECTION YOKE LLBY00ZSY003 or	LLBY00ZSY003
	DEFLECTION YOKE KDY3GD592X	LLBY00ZMS004


Table 1 (V501 and L551 Combination)

Note 1: Purity and Convergence Adjustments must be performed following CRT replacement. Refer to Electrical Adjustment Instructions.


Note2: Please confirm CRT Type No. on the CRT Warning Label which is located on the CRT. Then See the Table 1 for V501 and L551 combination chart. Please refer this CRT, Deflection Yoke combination chart for parts order.

V 501: CRT Type No.	V 501: CRT Part No.	L551: Deflection Yoke Part No.
CRT A34AGT13X	TCRT190CP036	LLBY00ZMS011 LLBY00ZSY005
CRT A34KPU02XX	TCRT190GS016	LLBY00ZSY002 LLBY00ZMS003
CRT A34LEX10X	TCRT190SAM01	LLBY00ZMS014
CRT A34JLL90X(W)	TCRT190QS015	LLBY00ZMS005
CRT A34KQW42X	TCRT190SM013	LLBY00ZMS006 LLBY00ZSY002
CRT A34LRQ90X(VW)	TCRT190P7003	LLBY00ZSY003 LLBY00ZMS004

CRT Warning Label Location

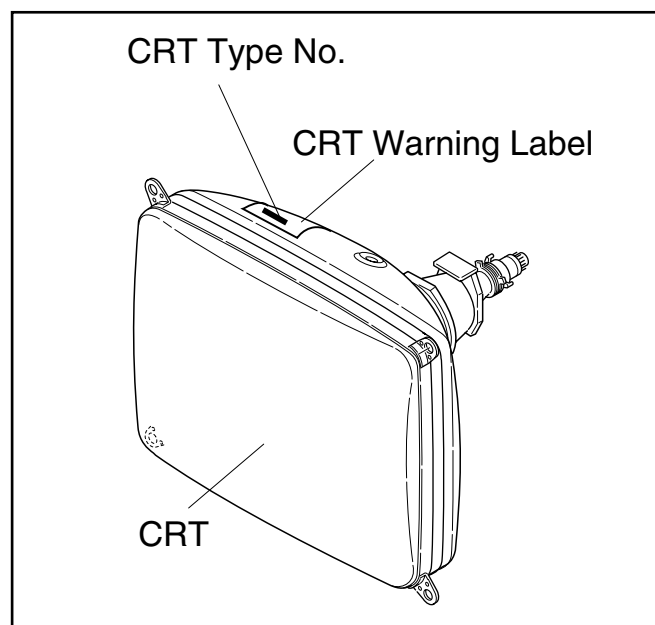

ELECTRICAL PARTS LIST

PRODUCT SAFETY NOTE: Products marked with a  have special characteristics important to safety. Before replacing any of these components, read carefully the product safety notice in this service manual. Don't degrade the safety of the product through improper servicing.

NOTES:

- Parts that not assigned part numbers (-----) are not available.
- Tolerance of Capacitors and Resistors are noted with the following symbols.

C.....±0.25%	D.....±0.5%	F.....±1%
G.....±2%	J.....±5%	K.....±10%
M.....±20%	N.....±30%	Z.....+80/-20%

MMA-315 CBA

Ref No.	Description	Part No.
	MMA-315 CBA Consists of the following	OESA03991
	MAIN CBA	-----
	CRT CBA	-----

Main CBA

Ref No.	Description	Part No.
	Main CBA Consists of the following	-----
CAPACITORS		
C 5	ELECTROLYTIC CAP. 100µF/10V M or	CE1AMASTL101
	ELECTROLYTIC CAP. 100µF/10V M	CE1AMASDL101
C 6	ELECTROLYTIC CAP. 4.7µF/50V M or	CE1JMASTL4R7
	ELECTROLYTIC CAP. 4.7µF/50V M	CE1JMASDL4R7
C 107	CHIP CERAMIC CAP. B K 0.01µF/50V	CHD1JKB0B103
C 111	ELECTROLYTIC CAP. 47µF/16V M or	CE1CMASTL470
	ELECTROLYTIC CAP. 47µF/16V M	CE1CMASDL470
C 112	ELECTROLYTIC CAP. 100µF/10V M or	CE1AMASTL101
	ELECTROLYTIC CAP. 100µF/10V M	CE1AMASDL101
C 125	CHIP CERAMIC CAP. CH J 47pF/50V	CHD1JJBCH470
C 130	CERAMIC CAP.(AX) B K 220pF/50V	CCA1JKT0B221
C 131	CHIP CERAMIC CAP. CH J 100pF/50V	CHD1JJBCH101
C 132	CHIP CERAMIC CAP. CH J 220pF/50V	CHD1JJBCH221
C 136	ELECTROLYTIC CAP. 4.7µF/50V M or	CE1JMASTL4R7
	ELECTROLYTIC CAP. 4.7µF/50V M	CE1JMASDL4R7
C 139	CHIP CERAMIC CAP. F Z 0.1µF/25V	CHD1EZB0F104
C 155	ELECTROLYTIC CAP. 47µF/16V M or	CE1CMASTL470
	ELECTROLYTIC CAP. 47µF/16V M	CE1CMASDL470
C 161	CHIP CERAMIC CAP. B K 0.01µF/50V	CHD1JKB0B103
C 162	CHIP CERAMIC CAP. B K 0.047µF/50V or	CHD1JKB0B473
	CHIP CERAMIC CAP. B K 0.047µF/25V	CHD1EKB0B473
C 171	CHIP CERAMIC CAP. CH J 220pF/50V	CHD1JJBCH221
C 172	CHIP CERAMIC CAP. CH J 220pF/50V	CHD1JJBCH221
C 173	ELECTROLYTIC CAP. 1µF/50V M or	CE1JMASTL1R0
	ELECTROLYTIC CAP. 1µF/50V M or	CE1JMASTL010
	ELECTROLYTIC CAP. 1µF/50V M or	CE1JMASDL1R0

Ref No.	Description	Part No.
	ELECTROLYTIC CAP. 1µF/50V M	CE1JMASDL010
C 174	FILM CAP.(P) 0.001µF/50V J or	CMA1JJS00102
	FILM CAP.(P) 0.001µF/50V J or	CA1J102MS029
	FILM CAP.(P) 0.001µF/50V J TV or	CMB1JJS00102
	* MYLAR CAP. 0.001µF/50V K	2250102S
C 302	ELECTROLYTIC CAP. 220µF/10V M or	CE1AMASTL221
	ELECTROLYTIC CAP. 220µF/10V M	CE1AMASDL221
C 303	CHIP CERAMIC CAP. B K 0.01µF/50V	CHD1JKB0B103
C 306	CHIP CERAMIC CAP. CH J 330pF/50V	CHD1JJBCH331
C 308	CHIP CERAMIC CAP. B K 0.01µF/50V	CHD1JKB0B103
C 309	ELECTROLYTIC CAP. 1µF/50V M or	CE1JMASTL1R0
	ELECTROLYTIC CAP. 1µF/50V M or	CE1JMASTL010
	ELECTROLYTIC CAP. 1µF/50V M or	CE1JMASDL1R0
	ELECTROLYTIC CAP. 1µF/50V M	CE1JMASDL010
C 322	ELECTROLYTIC CAP. 100µF/10V M or	CE1AMASTL101
	ELECTROLYTIC CAP. 100µF/10V M	CE1AMASDL101
C 323	FILM CAP.(P) 0.1µF/50V J or	CMA1JJS00104
	FILM CAP.(P) 0.1µF/50V J or	CA1J104MS029
	FILM CAP.(P) 0.1µF/50V J TV or	CMB1JJS00104
	MYLAR CAP. 0.1µF/50V K	2250104S
C 325	ELECTROLYTIC CAP. 100µF/10V M or	CE1AMASTL101
	ELECTROLYTIC CAP. 100µF/10V M	CE1AMASDL101
C 326	CERAMIC CAP.(AX) F Z 0.01µF/25V	CDA1EZT0F103
C 328	ELECTROLYTIC CAP. 10µF/50V M or	CE1JMASTL100
	ELECTROLYTIC CAP. 10µF/50V M	CE1JMASDL100
C 331	CHIP CERAMIC CAP. CH J 47pF/50V	CHD1JJBCH470
C 332	CERAMIC CAP.(AX) F Z 0.1µF/50V or	CA1J104TU014
	CERAMIC CAP.(AX) F Z 0.1µF/50V	CCA1JZT0F104
C 334	ELECTROLYTIC CAP. 1µF/50V M or	CE1JMASTL1R0
	ELECTROLYTIC CAP. 1µF/50V M or	CE1JMASTL010
	ELECTROLYTIC CAP. 1µF/50V M or	CE1JMASDL1R0
	ELECTROLYTIC CAP. 1µF/50V M	CE1JMASDL010
C 341	ELECTROLYTIC CAP. 1µF/50V M or	CE1JMASTL1R0
	ELECTROLYTIC CAP. 1µF/50V M or	CE1JMASTL010
	ELECTROLYTIC CAP. 1µF/50V M or	CE1JMASDL1R0
	ELECTROLYTIC CAP. 1µF/50V M	CE1JMASDL010
C 342	CERAMIC CAP.(AX) B K 0.015µF/50V	CA1J153TU011
C 344	ELECTROLYTIC CAP. 0.47µF/50V M or	CE1JMASTLR47
	ELECTROLYTIC CAP. 0.47µF/50V M	CE1JMASDLR47
C 345	CERAMIC CAP.(AX) F Z 0.1µF/50V or	CA1J104TU014
	CERAMIC CAP.(AX) F Z 0.1µF/50V	CCA1JZT0F104
C 351	ELECTROLYTIC CAP. 470µF/10V M or	CE1AMASTL471
	ELECTROLYTIC CAP. 470µF/10V M	CE1AMASDL471
C 353	CHIP CERAMIC CAP. B K 0.047µF/50V or	CHD1JKB0B473
	CHIP CERAMIC CAP. B K 0.047µF/25V	CHD1EKB0B473
C 361	CHIP CERAMIC CAP. CH J 270pF/50V	CHD1JJBCH271
C 363	ELECTROLYTIC CAP. 2.2µF/50V M LL	CE1JMASLL2R2
C 365	CERAMIC CAP.(AX) X K 3900pF/16V	CDA1CKT0X392
C 367	CHIP CERAMIC CAP. B K 0.01µF/50V	CHD1JKB0B103
C 371	ELECTROLYTIC CAP. 0.47µF/50V M or	CE1JMASTLR47
	ELECTROLYTIC CAP. 0.47µF/50V M	CE1JMASDLR47
C 372	CHIP CERAMIC CAP. CH J 33pF/50V	CHD1JJBCH330
C 374	CHIP CERAMIC CAP. B K 0.01µF/50V	CHD1JKB0B103
C 375	FILM CAP.(P) 0.022µF/50V J or	CMA1JJS00223
	FILM CAP.(P) 0.022µF/50V J or	CA1J223MS029
	FILM CAP.(P) 0.022µF/50V J TV or	CMB1JJS00223
	MYLAR CAP. 0.022µF/50V K	2250223S

*Mylar is a registered trademark of E.I. Du Pont de Nemours and Company.

Ref No.	Description	Part No.
C 376	CHIP RES. 1/10W J 0 Ω	RRXAJB5Z0000
C 393	CHIP CERAMIC CAP. F Z 0.1μF/25V	CHD1EZB0F104
C 396	ELECTROLYTIC CAP. 10μF/50V M or	CE1JMASTL100
	ELECTROLYTIC CAP. 10μF/50V M	CE1JMASDL100
C 551	ELECTROLYTIC CAP. 47μF/35V M or	CE1GMASTL470
	ELECTROLYTIC CAP. 47μF/35V M	CE1GMASDL470
C 552	FILM CAP.(P) 0.1μF/50V J or	CMA1JJS00104
	FILM CAP.(P) 0.1μF/50V J TV or	CA1J104MS029
	MYLAR CAP. 0.1μF/50V K	2250104S
C 554	ELECTROLYTIC CAP. 100μF/35V M or	CE1GMASTL101
	ELECTROLYTIC CAP. 100μF/35V M	CE1GMASDL101
C 562	ELECTROLYTIC CAP. 2.2μF/50V M LL	CE1JMASLL2R2
C 566	ELECTROLYTIC CAP. 1000μF/25V M or	CE1EMZNTL102
	ELECTROLYTIC CAP. 1000μF/25V M or	CE1EMZPDL102
	ELECTROLYTIC CAP. 1000μF/25V M	CE1EMZADL102
C 568	ELECTROLYTIC CAP. 3.3μF/50V M or	CE1JMASTL3R3
	ELECTROLYTIC CAP. 3.3μF/50V M	CE1JMASDL3R3
C 571 ▲	PP CAP. 0.33μF/200V J or	CT2E334MS040
▲	P.P. CAP. 0.33μF/200V J or	CA2D334KF002
▲	P.P. CAP 0.33μF/200V J or	CA2D334VC012
▲	PP CAP. 0.33μF/250V J	CT2E334MS041
C 574 ▲	ELECTROLYTIC CAP. 4.7μF/250V M or	CE2EMASTL4R7
▲	ELECTROLYTIC CAP. 4.7μF/250V M	CE2EMASDL4R7
C 577	ELECTROLYTIC CAP. 47μF/35V M or	CE1GMASTL470
	ELECTROLYTIC CAP. 47μF/35V M	CE1GMASDL470
C 578	FILM CAP.(P) 0.01μF/50V J or	CMA1JJS00103
	FILM CAP.(P) 0.01μF/50V J or	CA1J103MS029
	FILM CAP.(P) 0.01μF/50V J TV or	CMB1JJS00103
	MYLAR CAP. 0.01μF/50V K	2250103S
C 580 ▲	METALLIZED FILM CAP. 0.0082μF/1.6kV J or	CT3C822F7002
▲	METALLIZED FILM CAP. 0.0082μF/1.6kV J or	1220499
▲	P.P. CAP 0.0082μF/1.6K J	CA3C822VC011
C 584 ▲	ELECTROLYTIC CAP. 1μF/160V M or	CE2CMASTL1R0
▲	ELECTROLYTIC CAP. 1μF/160V M	CE2CMASDL010
C 594 ▲	ELECTROLYTIC CAP. 10μF/50V M or	CE1JMASTL100
▲	ELECTROLYTIC CAP. 10μF/50V M	CE1JMASDL100
C 601▲	METALLIZED FILM CAP. 0.1μF/250V or	CT2E104MS037
▲	FILM CAP.(MP) 0.1μF/250V M or	CT2E104DC009
▲	FILM CAP.(MP) 0.1μF/250V K	CT2E104DC011
C 605	CERAMIC CAP. F Z 0.01μF/500V or	CCD2JZD0F103
	CERAMIC CAP. 0.01μF/AC250V	CCD2EZA0F103
C 606	CERAMIC CAP. F Z 0.01μF/500V or	CCD2JZD0F103
	CERAMIC CAP. 0.01μF/AC250V	CCD2EZA0F103
C 609	CERAMIC CAP. B K 1000pF/2kV or	CCD3DKD0B102
	CERAMIC CAP. B K 1000pF/2kV or	CCD3DKP0B102
	CERAMIC CAP. B K 1000pF/2kV	CA3D102MR030
C 610 ▲	ALMINIUM ELECTROLYTIC CAP150μF/200V or	CA2D151NC088
▲	ELECTROLYTIC CAPACITOR 150μF/200V	CA2D151S6012
C 611	FILM CAP.(P) 0.022μF/50V J or	CMA1JJS00223
	FILM CAP.(P) 0.022μF/50V J or	CA1J223MS029
	FILM CAP.(P) 0.022μF/50V J TV or	CMB1JJS00223
	MYLAR CAP. 0.022μF/50V K	2250223S
C 612	CERAMIC CAP. LB 330pF/2kV or	CA3D331KG004
	CERAMIC CAP. BN 330pF/2kV	CCD3DKA0B331
C 614	CERAMIC CAP.(AX) B K 560pF/50V	CCA1JKT0B561
C 616	FILM CAP.(P) 0.039μF/50V J or	CMA1JJS00393
	FILM CAP.(P) 0.039μF/50V J or	CA1J393MS029
	FILM CAP.(P) 0.039μF/50V J TV or	CMB1JJS00393
	MYLAR CAP. 0.039μF/50V K	2250393S

Ref No.	Description	Part No.
C 617	CERAMIC CAP.(AX) B K 330pF/50V	CCA1JKT0B331
C 622	CERAMIC CAP.(AX) B K 1000pF/50V	CCA1JKT0B102
C 643▲	CERAMIC CAP. 0.0047UF F CS or	CCG2HMNF472
▲	SAFETY CAP. E M 4700pF/250V KH or	CCG2EMP0E472
▲	SAFETY CAP. 4700pF/250V	CCG2EMA0F472
C 650	CERAMIC CAP. LB 220pF/2kV or	CA3D221KG004
	CERAMIC CAP. BN J 220pF/2kV	CCD3DKA0B221
C 654 ▲	ELECTROLYTIC CAP. 1μF/50V M or	CE1JMASTL1R0
▲	ELECTROLYTIC CAP. 1μF/50V M or	CE1JMASTL010
▲	ELECTROLYTIC CAP. 1μF/50V M or	CE1JMASDL1R0
▲	ELECTROLYTIC CAP. 1μF/50V M	CE1JMASDL010
C 656	ELECTROLYTIC CAP. 100μF/160V M	CE2CMZPTL101
C 657 ▲	ELECTROLYTIC CAP. 1000μF/35V M or	CE1GMZNTL102
▲	ELECTROLYTIC CAP. 1000μF/35V M	CE1GMZADL102
C 658 ▲	ELECTROLYTIC CAP. 1000μF/16V M (VR/HC) or	CE1CMZNTL102
▲	ELECTROLYTIC CAP. 1000μF/16V M or	CE1CMZPDL102
▲	ELECTROLYTIC CAP. 1000μF/16V M	CE1CMZADL102
C 661 ▲	CERAMIC CAP.(AX) F Z 0.01μF/25V	CDA1EZT0F103
C 667	ELECTROLYTIC CAP. 1μF/50V M or	CE1JMASTL1R0
	ELECTROLYTIC CAP. 1μF/50V M or	CE1JMASTL010
	ELECTROLYTIC CAP. 1μF/50V M or	CE1JMASDL1R0
	ELECTROLYTIC CAP. 1μF/50V M	CE1JMASDL010
C 681	ELECTROLYTIC CAP. 100μF/10V M or	CE1AMASTL101
	ELECTROLYTIC CAP. 100μF/10V M	CE1AMASDL101
C 682	ELECTROLYTIC CAP. 100μF/10V M or	CE1AMASTL101
	ELECTROLYTIC CAP. 100μF/10V M	CE1AMASDL101
C 683	ELECTROLYTIC CAP. 100μF/10V M or	CE1AMASTL101
	ELECTROLYTIC CAP. 100μF/10V M	CE1AMASDL101
C 686	ELECTROLYTIC CAP. 33μF/16V M or	CE1CMASTL330
	ELECTROLYTIC CAP. 33μF/16V M	CE1CMASDL330
C 687	ELECTROLYTIC CAP. 100μF/10V M or	CE1AMASTL101
	ELECTROLYTIC CAP. 100μF/10V M	CE1AMASDL101
C 805	ELECTROLYTIC CAP. 220μF/16V M or	CE1CMASTL221
	ELECTROLYTIC CAP. 220μF/16V M	CE1CMASDL221
C 811	ELECTROLYTIC CAP. 470μF/16V M or	CE1CMASTL471
	ELECTROLYTIC CAP. 470μF/16V M	CE1CMASDL471
C 821	CHIP CERAMIC CAP. B K 4700pF/50V	CHD1JKB0B472
C 822	CERAMIC CAP.(AX) F Z 0.22μF/50V	CA1J224TU014
C 823	CERAMIC CAP.(AX) F Z 0.47μF/50V	CA1J474TU014
CONNECTORS		
CN 301	CONNECTOR BASE, 5P TUC-P05P-B1	J3TUA05TG001
CN 571▲	CONNECTOR BASE, 5P TV-50P-05-V3 or	J3TVC05TG002
▲	CONNECTOR BASE, 5P RTB-1.5-5P or	J3RTC05JG001
▲	CONNECTOR BASE, 5P W-P3005-02	1730812
CN 691▲	CONNECTOR BASE, 2P TV-50P-02-V3 or	J3TVC02TG002
▲	CONNECTOR BASE, 2P RTB-1.5-2P	J3RTC02JG001
CN 801	STRAIGHT CONNECTOR BASE 00 8283 0212 00 000 or	J383C02UG002
	STRAIGHT PIN HEADER, 2P 173981-2	1770258
DIODES		
D 103	ZENER DIODE MTZJT-775.6B	QDTB0MTZJ5R6
D 104	ZENER DIODE MTZJT-775.6B	QDTB0MTZJ5R6
D 134 ▲	ZENER DIODE MTZJT-775.6B	QDTB0MTZJ5R6
D 181 ▲	SWITCHING DIODE 1SS133(T-77) or	QDTZ001SS133
▲	SWITCHING DIODE 1N4148 or	NDTZ001N4148
▲	DIODE 1SS176TPA7	1SS176T
D 311	SWITCHING DIODE 1SS133(T-77) or	QDTZ001SS133
	SWITCHING DIODE 1N4148 or	NDTZ001N4148
	DIODE 1SS176TPA7	1SS176T
D 312	SWITCHING DIODE 1SS133(T-77) or	QDTZ001SS133

Ref No.	Description	Part No.
	SWITCHING DIODE 1N4148 or	NDTZ001N4148
	DIODE 1SS176TPA7	1SS176T
D 313	SWITCHING DIODE 1SS133(T-77) or	QDTZ001SS133
	SWITCHING DIODE 1N4148 or	NDTZ001N4148
	DIODE 1SS176TPA7	1SS176T
D 324	SWITCHING DIODE 1SS133(T-77) or	QDTZ001SS133
	SWITCHING DIODE 1N4148 or	NDTZ001N4148
	DIODE 1SS176TPA7	1SS176T
D 393	ZENER DIODE MTZJT-775.6B or	QDTB00MTZJ5R6
	ZENER DIODE MTZJT-775.6A	QDTA00MTZJ5R6
D 396	ZENER DIODE MTZJT-778.2B	QDTB00MTZJ8R2
D 397	SWITCHING DIODE 1SS133(T-77) or	QDTZ001SS133
	SWITCHING DIODE 1N4148 or	NDTZ001N4148
	DIODE 1SS176TPA7	1SS176T
D 551	DIODE 1N5397-B or	NDLZ001N5397
	RECTIFIER DIODE ERB12-06	QDQZ00ERB1206
D 568 ▲	SWITCHING DIODE 1SS133(T-77) or	QDTZ001SS133
▲	SWITCHING DIODE 1N4148 or	NDTZ001N4148
▲	DIODE 1SS176TPA7	1SS176T
D 569 ▲	ZENER DIODE MTZJT-7720B	QDTB00MTZJ20
D 571	DIODE FR104-B or	NDLZ000FR104
	RECTIFIER DIODE ERA22-02 or	QDPZ00ERA2202
	RECTIFIER DIODE 10ELS2	QDQZ0010ELS2
D 572 ▲	DIODE FR104-B or	NDLZ000FR104
▲	RECTIFIER DIODE ERA22-02 or	QDPZ00ERA2202
▲	RECTIFIER DIODE 10ELS2	QDQZ0010ELS2
D 573 ▲	DIODE FR104-B or	NDLZ000FR104
▲	RECTIFIER DIODE ERA22-02 or	QDPZ00ERA2202
▲	RECTIFIER DIODE 10ELS2	QDQZ0010ELS2
D 584 ▲	SWITCHING DIODE 1SS133(T-77) or	QDTZ001SS133
▲	SWITCHING DIODE 1N4148 or	NDTZ001N4148
▲	DIODE 1SS176TPA7	1SS176T
D 593 ▲	ZENER DIODE MTZJT-7736B	QDTB00MTZJ36
D 597	ZENER DIODE MTZJT-776.8B	QDTB00MTZJ6R8
D 605 ▲	DIODE 1N5397-B or	NDLZ001N5397
▲	RECTIFIER DIODE ERB12-06	QDQZ00ERB1206
D 606 ▲	DIODE 1N5397-B or	NDLZ001N5397
▲	RECTIFIER DIODE ERB12-06	QDQZ00ERB1206
D 607 ▲	DIODE 1N5397-B or	NDLZ001N5397
▲	RECTIFIER DIODE ERB12-06	QDQZ00ERB1206
D 608 ▲	DIODE 1N5397-B or	NDLZ001N5397
▲	RECTIFIER DIODE ERB12-06	QDQZ00ERB1206
D 611 ▲	ZENER DIODE MTZJT-7715B	QDTB00MTZJ15
D 613 ▲	ZENER DIODE MTZJT-7715B	QDTB00MTZJ15
D 615 ▲	SWITCHING DIODE 1N4148 T-77	QDTZ001N4148
D 621	ZENER DIODE MTZJT-773.0B	QDTB00MTZJ3R0
D 622	SWITCHING DIODE 1SS133(T-77) or	QDTZ001SS133
	SWITCHING DIODE 1N4148 or	NDTZ001N4148
	DIODE 1SS176TPA7	1SS176T
D 651 ▲	RECTIFIER DIODE 15DF4 or	QDQZ00015DF4
▲	RECOVERY DIODE ERC18-04 or	QDZZ00ERC1804
▲	FAST RECOVERY DIODE ERC25-06	QDQZ00ERC2506
D 652 ▲	DIODE FR154 or	NDLZ000FR154
▲	FAST RECOVERY DIODE ERB44-02	QDPZ00ERB4402
D 653 ▲	DIODE FR154 or	NDLZ000FR154
▲	FAST RECOVERY DIODE ERB44-02	QDPZ00ERB4402
D 654 ▲	SWITCHING DIODE 1SS133(T-77) or	QDTZ001SS133
▲	SWITCHING DIODE 1N4148 or	NDTZ001N4148
▲	DIODE 1SS176TPA7	1SS176T
D 657 ▲	DIODE 1ZC33 or	QDQZ0001ZC33
▲	ZENER DIODE RD33FB	QDQZ000RD33F

Ref No.	Description	Part No.
D 660	SWITCHING DIODE 1SS133(T-77) or	QDTZ001SS133
	SWITCHING DIODE 1N4148 or	NDTZ001N4148
	DIODE 1SS176TPA7	1SS176T
D 661	SWITCHING DIODE 1SS133(T-77) or	QDTZ001SS133
	SWITCHING DIODE 1N4148 or	NDTZ001N4148
	DIODE 1SS176TPA7	1SS176T
D 662 ▲	ZENER DIODE MTZJT-776.8B	QDTB00MTZJ6R8
D 666 ▲	ZENER DIODE MTZJT-7736B	QDTB00MTZJ36
D 671 ▲	SWITCHING DIODE 1SS133(T-77) or	QDTZ001SS133
▲	SWITCHING DIODE 1N4148 or	NDTZ001N4148
▲	DIODE 1SS176TPA7	1SS176T
D 672	SWITCHING DIODE 1SS133(T-77) or	QDTZ001SS133
	SWITCHING DIODE 1N4148 or	NDTZ001N4148
	DIODE 1SS176TPA7	1SS176T
D 673	SWITCHING DIODE 1SS133(T-77) or	QDTZ001SS133
	SWITCHING DIODE 1N4148 or	NDTZ001N4148
	DIODE 1SS176TPA7	1SS176T
D 682 ▲	ZENER DIODE MTZJT-775.6B	QDTB00MTZJ5R6
D 691 ▲	SWITCHING DIODE 1SS133(T-77) or	QDTZ001SS133
▲	SWITCHING DIODE 1N4148 or	NDTZ001N4148
▲	DIODE 1SS176TPA7	1SS176T
D 692	SWITCHING DIODE 1SS133(T-77) or	QDTZ001SS133
	SWITCHING DIODE 1N4148 or	NDTZ001N4148
	DIODE 1SS176TPA7	1SS176T
D 811 ▲	SWITCHING DIODE 1SS133(T-77) or	QDTZ001SS133
▲	SWITCHING DIODE 1N4148 or	NDTZ001N4148
▲	DIODE 1SS176TPA7	1SS176T
D 826	SWITCHING DIODE 1SS133(T-77) or	QDTZ001SS133
	SWITCHING DIODE 1N4148 or	NDTZ001N4148
	DIODE 1SS176TPA7	1SS176T
ICS		
IC 101 ▲	IC M37272M8H-200FP	QSZA00SMB013
IC 151	IC:MEMORY AT24C01A-10SC or	NSMMA00SAZ011
	IC(EEPROM) M24C01-MN6 or	NSMMA00SS027
	IC:MEMORY BR24C01AF-W or	QSMBA00SRM002
	IC:MEMORY BR24C01AF	QSMMA00SRM002
IC 333 ▲	IC:CHROMA/IF 1 CHIP M61203CFP	QSBBC00RMB001
IC 551 ▲	VERTICAL OUTPUT IC LA78040A or	QSBBA00SSY003
▲	VERTICAL OUTPUT IC AN5522	QSZBA00SMS002
IC 601▲	PHOTO COUPLER PF5001-B,C or	QPE300PF5001
▲	PHOTOCOUPLER LTV-817B-F or	NPEB00LTV817F
▲	PHOTOCOUPLER LTV-817C-F	NPEC00LTV817F
IC 801	AUDIO AMP LA4524L	QSBLA00SSY087
COILS		
L 5	INDUCTOR 22μH-K-5FT or	LLARKBSTU220
	INDUCTOR 22μH-K	LLARKDQKA220
L 11	INDUCTOR 0.47μH-J-26T or	LLAXJATTUR47
	INDUCTOR 0.47μH-K-26T	LLAXKATTUR47
L 15	INDUCTOR 0.82μH-J-26T	LLAXJATTUR82
L 111	INDUCTOR 22μH-K-5FT or	LLARKBSTU220
	INDUCTOR 22μH-K	LLARKDQKA220
L 112	INDUCTOR 22μH-J-26T or	LLAXJATTU220
	INDUCTOR 22μH-K-26T	LLAXKDTKA220
L 302	PCB JUMPER D0.6-P5.0	JW5.0T
L 304	INDUCTOR 1.0μH-K-26T or	LLAXKATTU1R0
	INDUCTOR 1.0μH-K-26T	LLAXKDTKA1R0
L 325	INDUCTOR 100μH-K-5FT or	LLARKBSTU101
	INDUCTOR 100μH-K	LLARKDQKA101
L 361	INDUCTOR 10μH-J-26T or	LLAXJATTU100
	INDUCTOR 10μH-K-26T	LLAXKDTKA100

Ref No.	Description	Part No.
L 373	INDUCTOR 2.2μH-J-26T or	LLAXJATTU2R2
	INDUCTOR 2.2μH-K-26T	LLAXKDTKA2R2
L 601 ▲	LINE FILTER TLF12UA302W1R0 or	LLBG00ZTU025
▲	LINE FILTER 5.0MH 6Y075 or	LLBG00ZKT004
▲	LINE FILTER LF005 or	LLBG00ZLH001
▲	LINE FILTER UU10.5-A or	LLBG00ZY2008
▲	LINE FILTER SA-91213B	LLBG00ZSA002
L 692	PCB JUMPER D0.6-P7.5	JW7.5T
TRANSISTORS		
Q 111	TRANSISTOR 2SC2785(F) or	QQSF02SC2785
	TRANSISTOR 2SC2785(H) or	QQSH02SC2785
	TRANSISTOR 2SC2785(J) or	QQSJ02SC2785
	TRANSISTOR KTC3199(GR) or	NQS10KTC3199
	TRANSISTOR KTC3198GR TO-92 or	NQS40KTC3198
	TRANSISTOR 2SC3331(T)-AANP or	2SC3331TZ
	TRANSISTOR 2SC3331(U)-AANP or	2SC3331UZ
	TRANSISTOR 2SC1815-GR(TPE2)	QQS102SC1815
Q 571 ▲	TRANSISTOR TT2084 or	QQZZ00TT2084
▲	TRANSISTOR 2SD2627LS-FEC-YB11	QQZZ02SD2627
Q 572	TRANSISTOR 2SC1627Y-TPE2	QQSY02SC1627
Q 601 ▲	MOS FET 2SK2872-54MR or	QFZZ02SK2872
▲	MOS FET 2SK2662	QF5Z02SK2662
Q 602 ▲	TRANSISTOR 2SC2120-O-TPE2 or	QQS002SC2120
▲	TRANSISTOR 2SC2120-Y(TPE2)	QQSY02SC2120
Q 662 ▲	TRANSISTOR 2SC2785(F) or	QQSF02SC2785
▲	TRANSISTOR 2SC2785(H) or	QQSH02SC2785
▲	TRANSISTOR 2SC2785(J) or	QQSJ02SC2785
▲	TRANSISTOR KTC3199(GR) or	NQS10KTC3199
▲	TRANSISTOR KTC3198GR TO-92 or	NQS40KTC3198
▲	TRANSISTOR 2SC3331(T)-AANP or	2SC3331TZ
▲	TRANSISTOR 2SC3331(U)-AANP or	2SC3331UZ
▲	TRANSISTOR 2SC1815-GR(TPE2)	QQS102SC1815
Q 671 ▲	TRANSISTOR 2SA1175(F) or	QQSF02SA1175
▲	TRANSISTOR KTA1267(GR) or	NQS10KTA1267
▲	TRANSISTOR KTA1266(GR) or	NQS40KTA1266
▲	TRANSISTOR 2SA1318(T)-AANP or	2SA1318TZ
▲	TRANSISTOR 2SA1318(U)-AANP or	2SA1318UZ
▲	TRANSISTOR 2SA1015-GR(TPE2)	QQS102SA1015
Q 676	RES. BUILT-IN TRANSISTOR BA1F4M-T or	QQSZ00BA1F4M
	RES. BUILT-IN TRANSISTOR KRC103M	NQSZ00KRC103M
Q 681	TRANSISTOR 2SC2120-O-TPE2 or	QQS002SC2120
	TRANSISTOR 2SC2120-Y(TPE2)	QQSY02SC2120
Q 682	TRANSISTOR 2SC2120-O-TPE2 or	QQS002SC2120
	TRANSISTOR 2SC2120-Y(TPE2)	QQSY02SC2120
Q 683	TRANSISTOR 2SC2120-O-TPE2 or	QQS002SC2120
	TRANSISTOR 2SC2120-Y(TPE2)	QQSY02SC2120
Q 831	TRANSISTOR 2SC2785(F) or	QQSF02SC2785
	TRANSISTOR 2SC2785(H) or	QQSH02SC2785
	TRANSISTOR 2SC2785(J) or	QQSJ02SC2785
	TRANSISTOR KTC3199(GR) or	NQS10KTC3199
	TRANSISTOR KTC3198GR TO-92 or	NQS40KTC3198
	TRANSISTOR 2SC3331(T)-AANP or	2SC3331TZ
	TRANSISTOR 2SC3331(U)-AANP or	2SC3331UZ
	TRANSISTOR 2SC1815-GR(TPE2)	QQS102SC1815
RESISTORS		
R 101	CHIP RES.(1608) 1/10W J 2.2k Ω	RRXAJB5Z0222
R 102	CHIP RES.(1608) 1/10W J 1.8k Ω	RRXAJB5Z0182
R 103	CHIP RES.(1608) 1/10W J 3.3k Ω	RRXAJB5Z0332
R 104	CHIP RES.(1608) 1/10W J 4.7k Ω	RRXAJB5Z0472
R 105	CHIP RES.(1608) 1/10W J 8.2k Ω	RRXAJB5Z0822

Ref No.	Description	Part No.
R 106	CHIP RES.(1608) 1/10W J 10k Ω	RRXAJB5Z0103
R 107	CHIP RES.(1608) 1/10W J 2.2k Ω	RRXAJB5Z0222
R 111	CARBON RES. 1/4W J 100 Ω or	RCX4JATZ0101
	CARBON RES. 1/6W J 100 Ω	RCX6JATZ0101
R 121	CHIP RES.(1608) 1/10W J 4.7k Ω	RRXAJB5Z0472
R 122	CHIP RES.(1608) 1/10W J 4.7k Ω	RRXAJB5Z0472
R 123	CHIP RES.(1608) 1/10W J 4.7k Ω	RRXAJB5Z0472
R 124	CHIP RES.(1608) 1/10W J 4.7k Ω	RRXAJB5Z0472
R 125	CHIP RES.(1608) 1/10W J 1.5k Ω	RRXAJB5Z0152
R 126	CHIP RES.(1608) 1/10W J 1.5k Ω	RRXAJB5Z0152
R 127	CHIP RES.(1608) 1/10W J 1.5k Ω	RRXAJB5Z0152
R 128	CHIP RES.(1608) 1/10W J 3.3k Ω	RRXAJB5Z0332
R 131	CHIP RES.(1608) 1/10W J 3.3k Ω	RRXAJB5Z0332
R 132	CHIP RES.(1608) 1/10W J 3.3k Ω	RRXAJB5Z0332
R 133	CHIP RES.(1608) 1/10W J 4.7k Ω	RRXAJB5Z0472
R 134 ▲	CHIP RES.(1608) 1/10W J 1k Ω	RRXAJB5Z0102
R 135	CHIP RES.(1608) 1/10W J 10k Ω	RRXAJB5Z0103
R 136	CARBON RES. 1/4W J 22k Ω or	RCX4JATZ0223
	CARBON RES. 1/6W J 22k Ω	RCX6JATZ0223
R 155	CHIP RES.(1608) 1/10W J 100 Ω	RRXAJB5Z0101
R 163	CHIP RES.(1608) 1/10W J 22k Ω	RRXAJB5Z0223
R 164	CHIP RES.(1608) 1/10W J 6.8k Ω	RRXAJB5Z0682
R 165	CHIP RES. 1/10W J 0 Ω	RRXAJB5Z0000
R 171	CHIP RES.(1608) 1/10W J 100 Ω	RRXAJB5Z0101
R 172	CHIP RES.(1608) 1/10W J 1k Ω	RRXAJB5Z0102
R 176	CHIP RES.(1608) 1/10W J 390k Ω	RRXAJB5Z0394
R 181	CHIP RES.(1608) 1/10W J 100 Ω	RRXAJB5Z0101
R 182	CHIP RES.(1608) 1/10W J 100 Ω	RRXAJB5Z0101
R 303	CHIP RES.(1608) 1/10W J 2.2k Ω	RRXAJB5Z0222
R 305	CHIP RES.(1608) 1/10W J 10k Ω	RRXAJB5Z0103
R 306	CHIP RES.(1608) 1/10W J 2.7k Ω	RRXAJB5Z0272
R 307	CHIP RES. 1/10W J 0 Ω	RRXAJB5Z0000
R 308	CHIP RES.(1608) 1/10W J 100 Ω	RRXAJB5Z0101
R 309	CHIP RES.(1608) 1/10W J 6.8k Ω	RRXAJB5Z0682
R 310	CARBON RES. 1/4W J 2.2k Ω or	RCX4JATZ0222
	CARBON RES. 1/6W J 2.2k Ω	RCX6JATZ0222
R 311	CHIP RES.(1608) 1/10W J 2.2k Ω	RRXAJB5Z0222
R 312	CHIP RES.(1608) 1/10W J 2.2k Ω	RRXAJB5Z0222
R 313	CHIP RES.(1608) 1/10W J 2.2k Ω	RRXAJB5Z0222
R 314	CHIP RES.(1608) 1/10W J 100 Ω	RRXAJB5Z0101
R 315	CHIP RES.(1608) 1/10W J 100 Ω	RRXAJB5Z0101
R 316	CHIP RES.(1608) 1/10W J 100 Ω	RRXAJB5Z0101
R 320	PCB JUMPER D0.6-P5.0	JW5.0T
R 321	CARBON RES. 1/4W J 1k Ω or	RCX4JATZ0102
	CARBON RES. 1/6W J 1k Ω	RCX6JATZ0102
R 323	CARBON RES. 1/4W J 22k Ω or	RCX4JATZ0223
	CARBON RES. 1/6W J 22k Ω	RCX6JATZ0223
R 324	CARBON RES. 1/4W J 10 Ω or	RCX4JATZ0100
	CARBON RES. 1/6W J 10 Ω	RCX6JATZ0100
R 326	CHIP RES.(1608) 1/10W J 470 Ω	RRXAJB5Z0471
R 332	CARBON RES. 1/4W J 15k Ω or	RCX4JATZ0153
	CARBON RES. 1/6W J 15k Ω	RCX6JATZ0153
R 333	CARBON RES. 1/4W J 82k Ω or	RCX4JATZ0823
	CARBON RES. 1/6W J 82k Ω	RCX6JATZ0823
R 334	CHIP RES.(1608) 1/10W J 120k Ω	RRXAJB5Z0124
R 341	CHIP RES.(1608) 1/10W J 6.8k Ω	RRXAJB5Z0682
R 346	CARBON RES. 1/4W J 100 Ω or	RCX4JATZ0101
	CARBON RES. 1/6W J 100 Ω	RCX6JATZ0101
R 347	CHIP RES.(1608) 1/10W J 10k Ω	RRXAJB5Z0103
R 348	CARBON RES. 1/4W J 220 Ω or	RCX4JATZ0221
	CARBON RES. 1/6W J 220 Ω	RCX6JATZ0221

Ref No.	Description	Part No.
R 351	PCB JUMPER D0.6-P5.0	JW5.0T
R 352	PCB JUMPER D0.6-P5.0	JW5.0T
R 361	CHIP RES.(1608) 1/10W J 82 Ω	RRXAJB5Z0820
R 367	CHIP RES. 1/10W J 0 Ω	RRXAJB5Z0000
R 368	CHIP RES.(1608) 1/10W J 10M Ω	RRXAJB5Z0106
R 369	CHIP RES.(1608) 1/10W J 15k Ω	RRXAJB5Z0153
R 371	CHIP RES.(1608) 1/10W J 470 Ω	RRXAJB5Z0471
R 373	CHIP RES.(1608) 1/10W J 390 Ω	RRXAJB5Z0391
R 391	CHIP RES.(1608) 1/10W J 100 Ω	RRXAJB5Z0101
R 392	CHIP RES.(1608) 1/10W J 100 Ω	RRXAJB5Z0101
R 393	CHIP RES.(1608) 1/10W J 1k Ω	RRXAJB5Z0102
R 396	CARBON RES. 1/4W J 220 Ω or	RCX4JATZ0221
	CARBON RES. 1/6W J 220 Ω	RCX6JATZ0221
R 397	CARBON RES. 1/4W J 220 Ω or	RCX4JATZ0221
	CARBON RES. 1/6W J 220 Ω	RCX6JATZ0221
R 551	CARBON RES. 1/4W J 4.7 Ω or	RCX4JATZ04R7
	CARBON RES. 1/6W J 4.7 Ω	RCX6JATZ04R7
R 552 ▲	CARBON RES. 1/4W J 1 Ω or	RCX4JATZ01R0
▲	CARBON RES. 1/6W J 1 Ω	RCX6JATZ01R0
R 553	CARBON RES. 1/4W J 1 Ω or	RCX4JATZ01R0
	CARBON RES. 1/6W J 1 Ω	RCX6JATZ01R0
R 554 ▲	CARBON RES. 1/4W J 3.9 Ω or	RCX4JATZ03R9
▲	CARBON RES. 1/6W J 3.9 Ω	RCX6JATZ03R9
R 556	CARBON RES. 1/4W J 1k Ω or	RCX4JATZ0102
	CARBON RES. 1/6W J 1k Ω	RCX6JATZ0102
R 557	CARBON RES. 1/4W J 1k Ω or	RCX4JATZ0102
	CARBON RES. 1/6W J 1k Ω	RCX6JATZ0102
R 558	CARBON RES. 1/4W J 3.3k Ω or	RCX4JATZ0332
	CARBON RES. 1/6W J 3.3k Ω	RCX6JATZ0332
R 559	CARBON RES. 1/4W J 3.3k Ω or	RCX4JATZ0332
	CARBON RES. 1/6W J 3.3k Ω	RCX6JATZ0332
R 561	CHIP RES.(1608) 1/10W J 470 Ω	RRXAJB5Z0471
R 562	CHIP RES.(1608) 1/10W J 2.7k Ω	RRXAJB5Z0272
R 563 ▲	CHIP RES.(1608) 1/10W J 10k Ω	RRXAJB5Z0103
R 564	CHIP RES.(1608) 1/10W J 22k Ω	RRXAJB5Z0223
R 566	CARBON RES. 1/4W J 2.2 Ω or	RCX4JATZ02R2
	CARBON RES. 1/6W J 2.2 Ω	RCX6JATZ02R2
R 569 ▲	CHIP RES.(1608) 1/10W J 6.8k Ω	RRXAJB5Z0682
R 571 ▲	METAL OXIDE FILM RES. 2W J 470 Ω or	RN02471KE009
▲	METAL OXIDE FILM RES. 2W J 470 Ω or	RN02471ZU001
▲	METAL RESISTOR 2W J 470 Ω or	RN02471UB001
▲	METAL OXIDE FILM RES. 2W J 470 Ω	RN02471DP004
R 575 ▲	CARBON RES. 1/4W J 47 Ω or	RCX4JATZ0470
▲	CARBON RES. 1/6W J 47 Ω	RCX6JATZ0470
R 576 ▲	CARBON RES. 1/4W J 47 Ω or	RCX4JATZ0470
▲	CARBON RES. 1/6W J 47 Ω	RCX6JATZ0470
R 577 ▲	PCB JUMPER D0.6-P5.0	JW5.0T
R 578	CARBON RES. 1/4W J 560 Ω or	RCX4JATZ0561
	CARBON RES. 1/6W J 560 Ω	RCX6JATZ0561
R 579	CARBON RES. 1/4W J 1k Ω or	RCX4JATZ0102
	CARBON RES. 1/6W J 1k Ω	RCX6JATZ0102
R 581	PCB JUMPER D0.6-P5.0	JW5.0T
R 583 ▲	METAL FILM RES.(STRAIGHT)2W J 1.8 Ω or	RN02JQZ01R8
▲	METAL FILM RES.(STRAIGHT)2W J 1.8 Ω or	RN02JZP01R8
▲	METAL OXIDE FILM RES. 2W J 1.8 Ω	RN021R8ZU001
R 584 ▲	CARBON RES. 1/4W J 1k Ω or	RCX4JATZ0102
▲	CARBON RES. 1/6W J 1k Ω	RCX6JATZ0102
R 588 ▲	CARBON RES. 1/4W J 100k Ω or	RCX4JATZ0104
▲	CARBON RES. 1/6W J 100k Ω	RCX6JATZ0104
R 589	CARBON RES. 1/4W J 100k Ω or	RCX4JATZ0104
	CARBON RES. 1/6W J 100k Ω	RCX6JATZ0104

Ref No.	Description	Part No.
R 591 ▲	CHIP RES.(1608) 1/10W J 180k Ω	RRXAJB5Z0184
R 592 ▲	CHIP RES.(1608) 1/10W J 100k Ω	RRXAJB5Z0104
R 593 ▲	CHIP RES.(1608) 1/10W J 68k Ω	RRXAJB5Z0683
R 594 ▲	CHIP RES.(1608) 1/10W J 100k Ω	RRXAJB5Z0104
R 597	CARBON RES. 1/4W J 8.2k Ω or	RCX4JATZ0822
	CARBON RES. 1/6W J 8.2k Ω	RCX6JATZ0822
R 598 ▲	CARBON RES. 1/4W J 47k Ω or	RCX4JATZ0473
▲	CARBON RES. 1/6W J 47k Ω	RCX6JATZ0473
R 599 ▲	CHIP RES.(1608) 1/10W J 22k Ω	RRXAJB5Z0223
R 601 ▲	CEMENT RES. 5W K 1.2 Ω or	RW051R2DP005
▲	CEMENT RESISTOR 5W K 1.2 Ω or	RW051R2PG001
▲	CEMENT RESISTOR SQZ05S1R2J or	RW051R2Y4001
▲	CEMENT RES. 3W J 1.2 Ω	RW031R2PG007
R 602	CARBON RES. 1/4W J 820k Ω or	RCX4JATZ0824
	CARBON RES. 1/6W J 820k Ω	RCX6JATZ0824
R 603	CARBON RES. 1/4W J 820k Ω or	RCX4JATZ0824
	CARBON RES. 1/6W J 820k Ω	RCX6JATZ0824
R 611	CARBON RES. 1/4W J 270 Ω or	RCX4JATZ0271
	CARBON RES. 1/6W J 270 Ω	RCX6JATZ0271
R 612	CARBON RES. 1/4W J 270 Ω or	RCX4JATZ0271
	CARBON RES. 1/6W J 270 Ω	RCX6JATZ0271
R 613 ▲	FIXED METAL OXIDE FILM RES. 2W J 0.47 Ω or	RN02JZQZ0R47
▲	METAL RES. 2W J 0.47 Ω or	RN02JZPZ0R47
▲	METAL OXIDE FILM RES. 2W J 0.47 Ω	RN02R47ZU001
R 614	CARBON RES. 1/4W J 47 Ω or	RCX4JATZ0470
	CARBON RES. 1/6W J 47 Ω	RCX6JATZ0470
R 616	CARBON RES. 1/4W J 10k Ω or	RCX4JATZ0103
	CARBON RES. 1/6W J 10k Ω	RCX6JATZ0103
R 621	CARBON RES. 1/4W J 1.5k Ω or	RCX4JATZ0152
	CARBON RES. 1/6W J 1.5k Ω	RCX6JATZ0152
R 622	CARBON RES. 1/4W J 10k Ω or	RCX4JATZ0103
	CARBON RES. 1/6W J 10k Ω	RCX6JATZ0103
R 623	CARBON RES. 1/4W J 330 Ω or	RCX4JATZ0331
	CARBON RES. 1/6W J 330 Ω	RCX6JATZ0331
R 624	PCB JUMPER D0.6-P5.0	JW5.0T
R 653	CHIP RES.(1608) 1/10W J 15k Ω	RRXAJB5Z0153
R 654 ▲	CARBON RES. 1/4W J 3.3k Ω or	RCX4JATZ0332
▲	CARBON RES. 1/6W J 3.3k Ω	RCX6JATZ0332
R 655	CARBON RES. 1/4W J 1k Ω or	RCX4JATZ0102
	CARBON RES. 1/6W J 1k Ω	RCX6JATZ0102
R 656 ▲	CHIP RES.(1608) 1/10W J 15k Ω	RRXAJB5Z0153
R 657 ▲	CARBON RES. 1/4W J 15k Ω or	RCX4JATZ0153
▲	CARBON RES. 1/6W J 15k Ω	RCX6JATZ0153
R 660	CARBON RES. 1/4W J 1k Ω or	RCX4JATZ0102
	CARBON RES. 1/6W J 1k Ω	RCX6JATZ0102
R 661 ▲	CARBON RES. 1/4W J 33k Ω or	RCX4JATZ0333
▲	CARBON RES. 1/6W J 33k Ω	RCX6JATZ0333
R 662 ▲	CARBON RES. 1/4W J 180k Ω or	RCX4JATZ0184
▲	CARBON RES. 1/6W J 180k Ω	RCX6JATZ0184
R 664 ▲	CHIP RES.(1608) 1/10W J 12k Ω	RRXAJB5Z0123
R 665 ▲	CHIP RES.(1608) 1/10W J 4.7k Ω	RRXAJB5Z0472
R 666 ▲	METAL OXIDE FILM RES. 2W J 12k Ω or	RN02123KE009
▲	METAL OXIDE FILM RES. 2W J 12k Ω or	RN02123ZU001
▲	METAL RESISTOR 2W J 12k Ω or	RN02123UB001
▲	METAL OXIDE FILM RES. 2W J 12k Ω	RN02123DP004
R 667 ▲	PCB JUMPER D0.6-P5.0	JW5.0T
R 668 ▲	METAL OXIDE FILM RES. 1W J 56k Ω or	RN01563KE009
▲	METAL OXIDE FILM RES. 1W J 56k Ω or	RN01563ZU001
▲	METAL OXIDE RESISTOR 1W J 56k Ω or	RN01563UB001
▲	METAL OXIDE FILM RES. 1W J 56k Ω	RN01563DP003

Ref No.	Description	Part No.
R 671	CARBON RES. 1/4W J 3.3k Ω or	RCX4JATZ0332
	CARBON RES. 1/6W J 3.3k Ω	RCX6JATZ0332
R 672	CARBON RES. 1/4W J 3.3k Ω or	RCX4JATZ0332
	CARBON RES. 1/6W J 3.3k Ω	RCX6JATZ0332
R 673	CARBON RES. 1/4W J 100k Ω or	RCX4JATZ0104
	CARBON RES. 1/6W J 100k Ω	RCX6JATZ0104
R 676	CARBON RES. 1/4W J 10k Ω or	RCX4JATZ0103
	CARBON RES. 1/6W J 10k Ω	RCX6JATZ0103
R 681 ▲	CARBON RES. 1/4W J 12 Ω or	RCX4JATZ0120
▲	CARBON RES. 1/6W J 12 Ω	RCX6JATZ0120
R 682 ▲	FIXED METAL OXIDE FILM RES. 1W J 33 Ω or	RN01330KE007
▲	METAL OXIDE FILM RES. 1W J 33 Ω or	RN01330ZU001
▲	METAL RES. 1W J 33 Ω or	RN01330UB001
▲	METAL OXIDE FILM RES. 1W J 33 Ω	RN01330DP003
R 683 ▲	FIXED METAL OXIDE FILM RES. 1W J 39 Ω or	RN01390KE007
▲	METAL OXIDE FILM RES. 1W J 39 Ω or	RN01390ZU001
▲	FIXED METAL OXIDE FILM RES. 1W J 39 Ω or	RN01390UB001
▲	METAL OXIDE FILM RES. 1W J 39 Ω	RN01390DP003
R 686	CARBON RES. 1/4W J 100 Ω or	RCX4JATZ0101
	CARBON RES. 1/6W J 100 Ω	RCX6JATZ0101
R 687	CARBON RES. 1/4W J 10 Ω or	RCX4JATZ0100
	CARBON RES. 1/6W J 10 Ω	RCX6JATZ0100
R 691 ▲	CARBON RES. 1/4W J 15k Ω or	RCX4JATZ0153
▲	CARBON RES. 1/6W J 15k Ω	RCX6JATZ0153
R 810 ▲	METAL OXIDE FILM RES. 1W J 8.2 Ω or	RN018R2ZU002
▲	METAL OXIDE FILM RES. 1W J 8.2 Ω or	RN018R2KE009
▲	METAL RESISTOR 1W J 8.2 Ω	RN018R2UB001
R 811 ▲	CARBON RES. 1/4W J 2.2k Ω or	RCX4JATZ0222
▲	CARBON RES. 1/6W J 2.2k Ω	RCX6JATZ0222
R 812 ▲	CHIP RES.(1608) 1/10W J 2.2k Ω	RRXAJB5Z0222
R 821	CHIP RES.(1608) 1/10W J 15k Ω	RRXAJB5Z0153
R 822	CHIP RES.(1608) 1/10W J 3.9k Ω	RRXAJB5Z0392
R 826	CARBON RES. 1/4W J 470k Ω or	RCX4JATZ0474
	CARBON RES. 1/6W J 470k Ω	RCX6JATZ0474
R 831	CHIP RES.(1608) 1/10W J 1k Ω	RRXAJB5Z0102
J 104	CHIP RES. 1/10W J 0 Ω	RRXAJB5Z0000
J 115	CHIP RES. 1/10W J 0 Ω	RRXAJB5Z0000
J 147	CARBON RES. 1/4W J 180k Ω or	RCX4JATZ0184
	CARBON RES. 1/6W J 180k Ω	RCX6JATZ0184
J 183	CHIP RES. 1/10W J 0 Ω	RRXAJB5Z0000
SWITCHES		
SW 101	TACT SWITCH SKQSAB or	SST0101AL038
	TACT SWITCH KSM0612B or	SST0101HH003
	TACT SWITCH SKHHAM	SST0101AL029
SW 102	TACT SWITCH SKQSAB or	SST0101AL038
	TACT SWITCH KSM0612B or	SST0101HH003
	TACT SWITCH SKHHAM	SST0101AL029
SW 103	TACT SWITCH SKQSAB or	SST0101AL038
	TACT SWITCH KSM0612B or	SST0101HH003
	TACT SWITCH SKHHAM	SST0101AL029
SW 104	TACT SWITCH SKQSAB or	SST0101AL038
	TACT SWITCH KSM0612B or	SST0101HH003
	TACT SWITCH SKHHAM	SST0101AL029
SW 105	TACT SWITCH SKQSAB or	SST0101AL038
	TACT SWITCH KSM0612B or	SST0101HH003
	TACT SWITCH SKHHAM	SST0101AL029
SW 106	TACT SWITCH SKQSAB or	SST0101AL038
	TACT SWITCH KSM0612B or	SST0101HH003
	TACT SWITCH SKHHAM	SST0101AL029
MISCELLANEOUS		

Ref No.	Description	Part No.
AC 601▲	AC CORD LA-2366 or	WAC0172LW006
▲	AC CORD WAC0172AS006 or	WAC0172AS006
▲	AC CORD WAC0172LTE01	WAC0172LTE01
B- 6	HEAT SINK(PFC)ASSEMBLY	0EM406060
B- 7	HEAT SINK(PFA)	0EM406027
B- 12	CLOTH(65) L7735TR:65X10X0.5T	0EM402149
BC 101	BEAD INDUCTORS FBR07HA121TB-00	LLBF00ZTU021
BC 571	BEAD INDUCTORS FBA04HA600VB-00	LLBF00STU026
BC 601	BEAD INDUCTORS FBR07HA121TB-00	LLBF00ZTU021
BC 602	BEAD INDUCTORS FBR07HA121TB-00	LLBF00ZTU021
BC 641	BEAD INDUCTORS FBR07HA121TB-00	LLBF00ZTU021
BC 651	BEAD INDUCTORS FBR07HA121TB-00	LLBF00ZTU021
BC 652	BEAD INDUCTORS FBR07HA121TB-00	LLBF00ZTU021
BC 653	BEAD INDUCTORS FBR07HA121TB-00	LLBF00ZTU021
BC 691	BEAD INDUCTORS FBR07HA121TB-00	LLBF00ZTU021
BC 692	BEAD INDUCTORS FBR07HA121TB-00	LLBF00ZTU021
CF 301	4.5M TRAP XT4.5MB2 or	FBE455PLN001
	CERAMIC TRAP 4.5MHz or	FBE455PMR003
	CERAMIC TRAP 4.5MHz	FBE455PMS001
CF 302	4.5M FILTER LTH4.5MCB or	FBB455PLN001
	CERAMIC FILTER SFSRA4M50CF00-B0 or	FBB455PMR004
	CERAMIC FILTER 4.5MHz	FBB455PMS001
CLN301	WIRE ASSEMBLY WX1L9700-104	WX1L9700-104
F 601▲	FUSE 4A/125V 237 TYPE or	PAGJ20CAG402
▲	FUSE TDS4A125VU/C	PAGD20CW3402
FH 601	FUSE HOLDER MSF-015 or	XH01Z00LY001
	FUSE HOLDER FH-V-03078 or	XH01Z00DK001
	HOLDER, FUSE CNT41-0014	1790424
FH 602	FUSE HOLDER MSF-015 or	XH01Z00LY001
	FUSE HOLDER FH-V-03078 or	XH01Z00DK001
	HOLDER, FUSE CNT41-0014	1790424
GP 641▲	GAP. FNR-G3.10D	FAZ000LD6005
JK 501▲	CRT SOCKET ISMS02S	JSCC220PK003
JS 601	PCB JUMPER D0.6-P7.5	JW7.5T
JS 642	PCB JUMPER D0.6-P15.0	JW15.0T
JS 801	PCB JUMPER D0.6-P5.0	JW5.0T
JS 802	PCB JUMPER D0.6-P5.0	JW5.0T
L- 1	B-TITE SCREW 3X8 BIND + CHROME or	GBMB3080
	B-TITE SCREW 3X8 BIND + CHROME	GBMB3080
PS 691▲	THERMISTOR ZPB45BL7R0A	QNZ45BL7R0A
RCV101	REMOCON RECEIVE UNIT PIC-26042SR-2 or	USESJRSKK032
	REMOCON RECEIVE UNIT PIC-37042SR	USESJRSKK034
SA 601▲	SURGE ABSORBER AVR-S07D471KAAS or	QVQZ04AVRS07D
▲	VARIATOR ENC471D-07A or	QVQZ0471D07A
▲	SURGE ABSORBER JVR-07N471K	NVQZVR07N471
SF 1	SAW FILTER SAF45MHA220ZL	FBB456PMR002
T 571▲	FLYBACK TRANSFORMER JF0501-2406 or	LTF00CPXB020
▲	FLYBACK TRANSFORMER BSC21-2601S	LTF00CPS2026
T 572	HORIZONTAL DRIVE TRANS LP2-005	LTH00CPA5005
T 601▲	SWITCHING TRANS K0F12F-0202 or	LTT00CPKT065
▲	SWICHING TRANS SA-13L11	LTT00CPSA085
TP 300	PCB JUMPER D0.6-P12.5	JW12.5T
TP 301	PCB JUMPER D0.6-P15.0	JW15.0T
TP 601	PCB JUMPER D0.6-P12.5	JW12.5T
TU 1	TUNER UNIT TEDH9-203B	UTUNNTUAL021
VR 661 ▲	CARBON P.O.T. 30k Ω B or	VRCB303KA011
▲	CARBON P.O.T. 30k Ω B	VRCB303HH014
X 101	CERAMIC RESONATOR KBR-8.0MKC or	FY0805PKC002
	CERAMIC RESONATOR CSTS0800MG03 or	FYL805PMR001
	CERAMIC RESONATOR ZTT 8.00MHz or	FY0805PLN001
	CERAMIC RESONATOR FCR8.0MC	FY0805PTE001

Ref No.	Description	Part No.
X 331	X'TAL 3.579545 MHz	FXD355LLN003

CRT CBA

Ref No.	Description	Part No.
	CRT CBA Consists of the following	-----
CAPACITORS		
C 501	CHIP CERAMIC CAP. CH J 270pF/50V	CHD1JJBCH271
C 502	CHIP CERAMIC CAP. CH J 270pF/50V	CHD1JJBCH271
C 503	CHIP CERAMIC CAP. CH J 330pF/50V	CHD1JJBCH331
C 504	ELECTROLYTIC CAP. 47μF/16V M or	CE1CMASL470
	ELECTROLYTIC CAP. 47μF/16V M	CE1CMASDL470
C 510	CERAMIC CAP. B K 1000pF/2kV or	CCD3DKD0B102
	CERAMIC CAP. B K 1000pF/2kV or	CCD3DKP0B102
	CERAMIC CAP. B K 1000pF/2kV	CA3D102MR030
CONNECTORS		
CN501	PIN CONNECTOR 005P-5100	JTEA001TG001
COILS		
L 501	INDUCTOR 180μH-J-5FT or	LLARJCSU181
	INDUCTOR 180μH-K-5FT	LLARKDSKA181
TRANSISTORS		
Q 501	TRANSISTOR 2SC2482 TPE6 or	QQSZ02SC2482
	TRANSISTOR 2SC3468(E)-AE or	QQSE02SC3468
	TRANSISTOR 2SC3468(D)-AE or	QQSD02SC3468
	TRANSISTOR 2SC2271(D)-AEMP or	2SC2271DZ
	TRANSISTOR 2SC2271(E)-AE	QQSE02SC2271
Q 502	TRANSISTOR 2SC2482 TPE6 or	QQSZ02SC2482
	TRANSISTOR 2SC3468(E)-AE or	QQSE02SC3468
	TRANSISTOR 2SC3468(D)-AE or	QQSD02SC3468
	TRANSISTOR 2SC2271(D)-AEMP or	2SC2271DZ
	TRANSISTOR 2SC2271(E)-AE	QQSE02SC2271
Q 503	TRANSISTOR 2SC2482 TPE6 or	QQSZ02SC2482
	TRANSISTOR 2SC3468(E)-AE or	QQSE02SC3468
	TRANSISTOR 2SC3468(D)-AE or	QQSD02SC3468
	TRANSISTOR 2SC2271(D)-AEMP or	2SC2271DZ
	TRANSISTOR 2SC2271(E)-AE	QQSE02SC2271
RESISTORS		
R 501 ▲	FIXED METAL OXIDE FILM RES. 1W J 15k Ω or	RN01153KE007
▲	METAL OXIDE FILM RES. 1W J 15k Ω or	RN01153ZU001
▲	METAL RESISTOR 1W J 15k Ω or	RN01153UB001
▲	METAL OXIDE FILM RES. 1W J 15k Ω	RN01153DP003
R 502 ▲	FIXED METAL OXIDE FILM RES. 1W J 15k Ω or	RN01153KE007
▲	METAL OXIDE FILM RES. 1W J 15k Ω or	RN01153ZU001
▲	METAL RESISTOR 1W J 15k Ω or	RN01153UB001
▲	METAL OXIDE FILM RES. 1W J 15k Ω	RN01153DP003
R 503 ▲	FIXED METAL OXIDE FILM RES. 1W J 15k Ω or	RN01153KE007
▲	METAL OXIDE FILM RES. 1W J 15k Ω or	RN01153ZU001
▲	METAL RESISTOR 1W J 15k Ω or	RN01153UB001
▲	METAL OXIDE FILM RES. 1W J 15k Ω	RN01153DP003
R 504	CARBON RES. 1/4W J 1.5k Ω or	RCX4JATZ0152
	CARBON RES. 1/6W J 1.5k Ω	RCX6JATZ0152
R 505	CARBON RES. 1/4W J 1.5k Ω or	RCX4JATZ0152
	CARBON RES. 1/6W J 1.5k Ω	RCX6JATZ0152
R 506	CARBON RES. 1/4W J 1.5k Ω or	RCX4JATZ0152
	CARBON RES. 1/6W J 1.5k Ω	RCX6JATZ0152
R 509	CARBON RES. 1/4W J 1.5k Ω or	RCX4JATZ0152
	CARBON RES. 1/6W J 1.5k Ω	RCX6JATZ0152
R 511	CHIP RES.(1608) 1/10W J 33 Ω	RRXAJB5Z0330
R 512	CHIP RES.(1608) 1/10W J 33 Ω	RRXAJB5Z0330

Ref No.	Description	Part No.
R 513	CHIP RES.(1608) 1/10W J 33 Ω	RRXAJB5Z0330
R 514	CARBON RES. 1/4W J 3.3k Ω or	RCX4JATZ0332
	CARBON RES. 1/6W J 3.3k Ω	RCX6JATZ0332
R 515	CARBON RES. 1/4W J 3.3k Ω or	RCX4JATZ0332
	CARBON RES. 1/6W J 3.3k Ω	RCX6JATZ0332
R 516	CARBON RES. 1/4W J 3.3k Ω or	RCX4JATZ0332
	CARBON RES. 1/6W J 3.3k Ω	RCX6JATZ0332
R 517	CARBON RES. 1/4W J 560 Ω or	RCX4JATZ0561
	CARBON RES. 1/6W J 560 Ω	RCX6JATZ0561
R 518	CARBON RES. 1/4W J 560 Ω or	RCX4JATZ0561
	CARBON RES. 1/6W J 560 Ω	RCX6JATZ0561
R 519	CARBON RES. 1/4W J 560 Ω or	RCX4JATZ0561
	CARBON RES. 1/6W J 560 Ω	RCX6JATZ0561
R 537	CARBON RES. 1/4W J 1.5k Ω or	RCX4JATZ0152
	CARBON RES. 1/6W J 1.5k Ω	RCX6JATZ0152
R 538	CARBON RES. 1/4W J 1.5k Ω or	RCX4JATZ0152
	CARBON RES. 1/6W J 1.5k Ω	RCX6JATZ0152
MISCELLANEOUS		
BC 501	BEAD INDUCTORS FBR07HA121TB-00	LLBF00ZTU021
CLN501	PARALLEL WIRE L=250 3P	WX1L1000-102
TP 501	PCB JUMPER D0.6-P10.0	JW10.0T
TP 502	PCB JUMPER D0.6-P10.0	JW10.0T

ST413B

L1300UA